


Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Panduit](#)
[HTWC750-4/0-1](#)

For any questions, you can email us directly:
sales@integrated-circuit.com

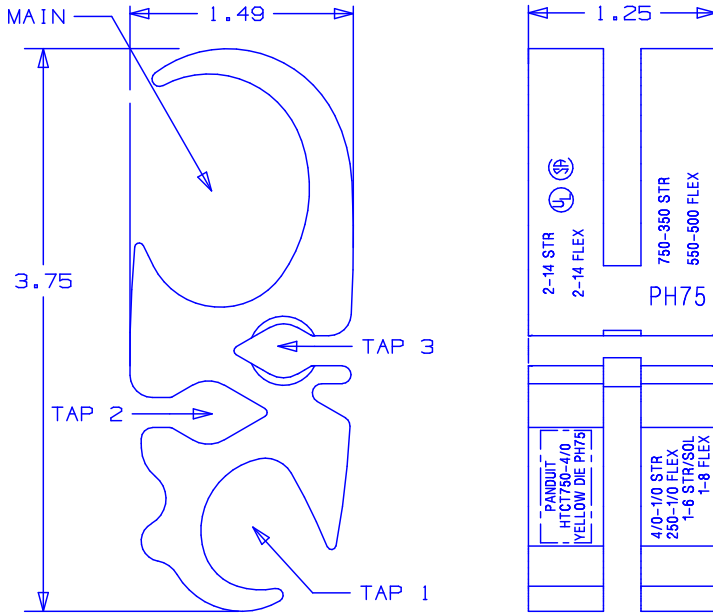

NOTES:

1. MATERIAL: ANNEALED HIGH CONDUCTIVITY COPPER. TIN PLATED
2. FOR USE WITH COPPER OR TIN PLATED COPPER CONDUCTORS ONLY.
3. ACCOMODATES CODE CABLE, SOLID WIRE (WHERE NOTED), FLEX LOCOMOTIVE (DLO), AND FLEX CLASSES G, H, & I.
4. ANY SINGLE TAP OR COMBINATION OF TAPS MAY BE USED IN CONJUNCTION WITH MAIN WIRE PORT.
5. UL LISTED AND CSA CERTIFIED FOR APPLICATIONS UP TO 600V. TEMPERATURE RATING 90° C MAX.
6. FLAME RETARDANT CABLE TIES (UL94 V-0 RATED NYLON WITH L.O.I. =28 MIN.) ARE PROVIDED WITH THE TAPS TO RETAIN THE WIRES IN POSITION FOR CRIMPING.
7. TO ORDER H-TAP WITH INSULATING COVERS SEE PART NUMBERS IN TABLE.
8. H-TAPS AND KITS ARE PACKAGED INDIVIDUALLY. (-1 PACKAGING CODE)
9. FOR PANDUIT CLEAR INSULATING COVER USED WITH HTAP, ORDER PANDUIT PART NO. CLRCVR6-1.



H-TAP PART NUMBER	H-TAP & CLEAR COVER KIT PART NUMBER	COPPER CONDUCTOR SIZES CODE WIRE (FLEX WIRE)				WIRE STRIP LENGTH (in.)	CRIMP DIE COLOR CODE	PANDUIT INSTALLATION TOOLS	
		MAIN	TAP 1	TAP 2	TAP 3			CT-940CH CT-2940	CRIMP DIE NO/DIE INDEX NO. (# OF CRIMPS=1)
HTCT750-4/0-1	HTWC750-4/0-1	750-350 (550-500)	4/0-1/0 (250-1/0)	1-6 STR/SOL (1-8)	2-14 (2-14)	1-3/8	YELLOW	CD-940H-750 PH75	

C41384_01

01	02/04	RWK		ADDED NOTE 9.				HTCT750-4/0						
00	11/03	KLFU	RLS	DRAWING RELEASED				11144	LSM	JAC	H-TAP COPPER COMPRESSION CONNECTOR			
REV	DATE	BY	CHK	DESCRIPTION				ECN #	PM	CUST	DRAWN BY KLFU	CHK'D	SCALE NONE	DRAWING NO. C41384