

Excellent Integrated System Limited

Stocking Distributor

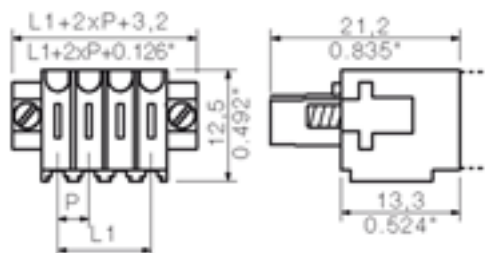
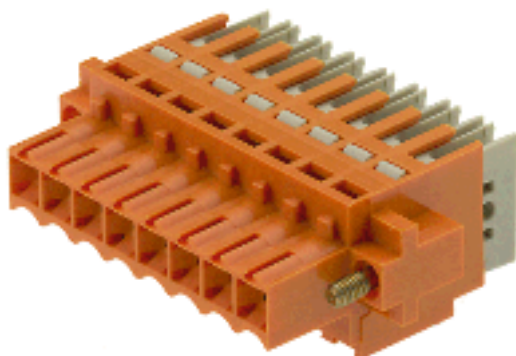
Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Weidmüller](#)
[1771110000](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

Product catalogue | PCB connection systems | PCB plug-in connectors | Pitch 3.50 mm (0.138 inch) | Socket connectors, insulation displacement connection, pitch 3.5 | BLIDC 3.5 | BLIDC 3.5F SN


General ordering data

Order No.	1771110000
Part designation	BLIDC 3.5/4F SN SW
Version	PCB plug-in connector, Female connectors, IDC terminal, Clamping range, max.: 0.5 mm ² , Pitch: 3.50 mm, No. of poles: 4, 90°/180°, Box
EAN	4032248146826
Qty.	100 pc(s).

System parameters

Conductor connection system	IDC terminal
Outgoing direction of conductor	90°/180°
Pitch	3.5 mm
Pitch in inch	0.138 inch
No. of poles	4
No. of rows	1
Screwdriver blade	0.4 x 2.5
Screwdriver blade standard	DIN 5264-A
L1 in mm	10.5 mm
L1 in inch	0.413 inch
Electric shock protection to DIN VDE 0470	IP 20
Electric shock protection to DIN VDE 0470	Safe from finger touch

Material data

Insulating material	PBT
Colour	black
colour chart	Similar to RAL 9011
Insulating material group	IIIa
Flammability class UL 94	V-0
CTI	>= 200
Contact base material	CuSn
Contact surface	tinned

Connectable conductors

Clamping range, min.	0.32 mm ²
----------------------	----------------------

Product catalogue | PCB connection systems | PCB plug-in connectors | Pitch 3.50 mm (0.138 inch) | Socket connectors, insulation displacement connection, pitch 3.5 | BLIDC 3.5 | BLIDC 3.5F SN

Connectable conductors

Clamping range, max.	0.5 mm ²
AWG, min.	22
AWG, max.	20
Outer diameter of insulation, max.	2.1 mm
Solid, min. H05(07) V-U	0.2 mm ²
Solid, max. H05(07) V-U	0.5 mm ²
Flexible, min. H05(07) V-K	0.2 mm ²
Flexible, max. H05(07) V-K	0.5 mm ²

DIN IEC rating data

Rated current, min. No. pins (Tu=20°C)	6 A
Rated current, max. No. pins (Tu=20°C)	6 A
Rated current, min. No. pins (Tu=40°C)	6 A
Rated current, max. No. pins (Tu=40°C)	5 A
Rated voltage for overvoltage class/pollution severity II/2	320 V
Rated voltage for overvoltage class/pollution severity III/2	160 V
Rated voltage for overvoltage class/pollution severity III/3	160 V
Rated impulse withstand voltage for overvoltage class/pollution severity II/2	2.5 kV
Rated impulse withstand voltage for overvoltage class/pollution severity III/2	2.5 kV
Rated impulse withstand voltage for overvoltage class/pollution severity III/3	2.5 kV
Short-time withstand current resistance	3 x 1s with 60 A

CSA rating data

Rated voltage (Use group D)	300 V
Rated current (Use group D)	7 A
AWG conductor (field wiring), min.	22
AWG conductor (field wiring), max.	20

UL 1059 rating data

Rated voltage (Use group D)	300 V
Rated current (Use group D)	7 A
AWG conductor, min.	22
AWG conductor, max.	20

Approvals

Approvals institutes



Classifications

ETIM 2.0	NK
ETIM 3.0	EC001284
eClass 4.1	27-26-07-01

Product catalogue | PCB connection systems | PCB plug-in connectors | Pitch 3.50 mm (0.138 inch) | Socket connectors, insulation displacement connection, pitch 3.5 | BLIDC 3.5 | BLIDC 3.5F SN

Classifications

eClass 5.0	27-26-07-01
eClass 5.1	27-26-07-04

Similar products

Order No.	Part designation	Version
1751100000	BLIDC 3.5/3F SN OR	PCB plug-in connector, Female connectors, IDC terminal, Clamping range, max.: 0.5 mm ² , Pitch: 3.50 mm, No. of poles: 3, 90°/180°, Box
1751110000	BLIDC 3.5/4F SN OR	PCB plug-in connector, Female connectors, IDC terminal, Clamping range, max.: 0.5 mm ² , Pitch: 3.50 mm, No. of poles: 4, 90°/180°, Box
1751120000	BLIDC 3.5/5F SN OR	PCB plug-in connector, Female connectors, IDC terminal, Clamping range, max.: 0.5 mm ² , Pitch: 3.50 mm, No. of poles: 5, 90°/180°, Box
1751140000	BLIDC 3.5/7F SN OR	PCB plug-in connector, Female connectors, IDC terminal, Clamping range, max.: 0.5 mm ² , Pitch: 3.50 mm, No. of poles: 7, 90°/180°, Box
1751160000	BLIDC 3.5/9F SN OR	PCB plug-in connector, Female connectors, IDC terminal, Clamping range, max.: 0.5 mm ² , Pitch: 3.50 mm, No. of poles: 9, 90°/180°, Box
1751180000	BLIDC 3.5/11F SN OR	PCB plug-in connector, Female connectors, IDC terminal, Clamping range, max.: 0.5 mm ² , Pitch: 3.50 mm, No. of poles: 11, 90°/180°, Box
1751190000	BLIDC 3.5/12F SN OR	PCB plug-in connector, Female connectors, IDC terminal, Clamping range, max.: 0.5 mm ² , Pitch: 3.50 mm, No. of poles: 12, 90°/180°, Box
1751200000	BLIDC 3.5/13F SN OR	PCB plug-in connector, Female connectors, IDC terminal, Clamping range, max.: 0.5 mm ² , Pitch: 3.50 mm, No. of poles: 13, 90°/180°, Box