

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:







[TE Connectivity AMP Connectors](#)
[557969-1](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

DRAWING MADE IN THIRD ANGLE PROJECTION		7	
THIS DRAWING IS UNPUBLISHED.		RELEASED FOR PUBLICATION	
© COPYRIGHT 19		, 19	
BY AMP INCORPORATED. ALL INTERNATIONAL RIGHTS RESERVED.			

LOD	DISP			REVISIONS			
AA	22	P	F	ZONE	LTR	DESCRIPTION	DATE
					C	REV, EC 0210-0231-96	6-5-96
							DRGTA

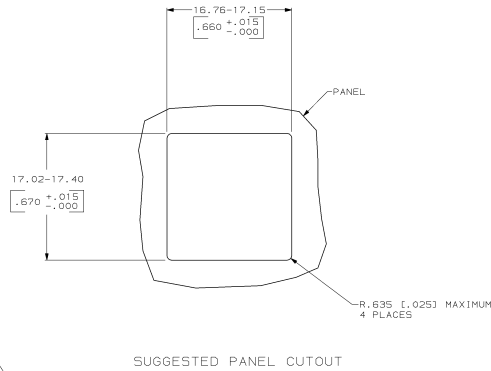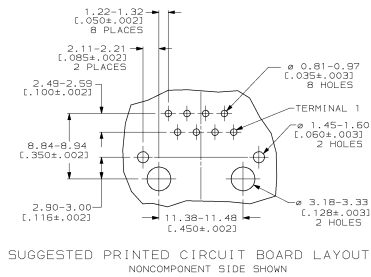

- ⚠ DIMENSIONS ARE MAXIMUM UNLESS OTHERWISE SPECIFIED.
- ⚠ MATERIAL: HOUSING- POLYESTER MOLDING COMPOUND, BLACK.
TERMINALS- 0.350 (1.1381) THICK PHOS BRONZE PLATED WITH 1.27μm (0.000050) MINIMUM THICK GOLD IN LOCALIZED AREA OF 2.54μm (0.000100) MINIMUM THICK TIN-LEAD IN SOLDER AREA OVER 1.27μm (0.000050) MINIMUM THICK NICKEL UNDERPLATE. SHIELD- COPPER ZINC ALLOY PLATED WITH 2.54μm (0.000100) MINIMUM THICK TIN-LEAD OVER 2.54μm (0.000100) MINIMUM THICK COPPER UNDERPLATE.
- ⚠ CAVITY CONFORMS TO FCC RULES AND REGULATIONS PART 68 AND AREA BULLETIN 345-81, PE-76 SPECIFICATION FOR MODULAR TELEPHONE HARDWARE.

DO NOT SCALE PRINTED UNLESS SPECIFIED		DR 6-18-83		2.79 - 3.30 (1.20x.010)		5579689-2	
DIMENSIONS IN INCHES		K. SIMPSON		2.92 - 3.94 (1.35x.020)		5579689-1	
1. HOLE DIA. = .0015		C. F. FORD		DIN A		PART NO	
2. HOLE DIA. = .0015		APFD 6-24-83		AMP		AMP Incorporated	
3. HOLE DIA. = .0015		J. TONEY		NAME		Hartford, 17105-3608	
4. HOLE DIA. = .0015		APFD 6-24-83		MODULAR JACK ASSEMBLY,			
5. HOLE DIA. = .0015		R. MORRATH		TOP ENTRY 8 POSITION,			
6. HOLE DIA. = .0015		PRODUCED BY		FLANGELESS, SHIELDED, WITH PANEL			
7. HOLE DIA. = .0015		108-1163		STOPS, PANEL & PCB GROUNDS			
APPROVAL SPEC		114-2048		R150			
FINISH		D		00779		C=5579689	
DATE		4.1		SHEET		1 OF 1	

CUSTOMER DRAWING