

Excellent Integrated System Limited

Stocking Distributor


Click to view price, real time Inventory, Delivery & Lifecycle Information:

[On-Shore Technology, Inc.](#)
[41197.2](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

SRSL 10-T35

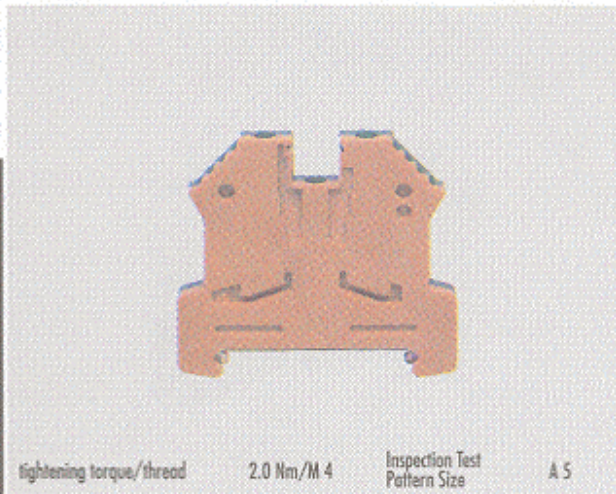


tightening torque/thread 2.0 Nm/M 4 Inspection Test Pattern Size A 5

Type Cat.-No. Qty.p.pck.
SRSL 10-T35 41213.2 green/yellow 80

Ratings:
Dimensions TS 35
 Lx8xH (mm) 56x10x47
 Stripped Length 12 mm
Max Rated Cross Section
 Single Wire (solid) 0.2-10 mm²
 Stranded Wire (flexible) 0.2-10 mm²
 Wire Size AWG 20-8

SRSL 16-T32

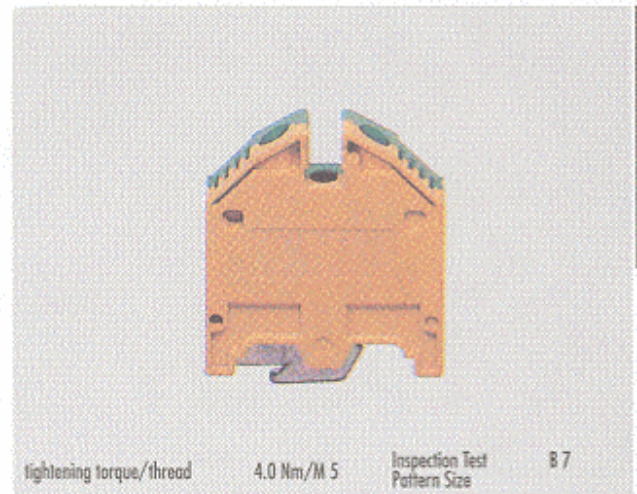


tightening torque/thread 4.0 Nm/M 5 Inspection Test Pattern Size B 7

Type Cat.-No. Qty.p.pck.
SRSL 16-T32 41196.2 green/yellow 50

Ratings:
Dimensions TS 32
 Lx8xH (mm) 50x12x63
 Stripped Length 12 mm
Max Rated Cross Section
 Single Wire (solid) 2.5-25 mm²
 Stranded Wire (flexible) 2.5-16 mm²
 Wire Size AWG 12-6

EARTH TERMINAL BLOCKS

SRSL 35-T32

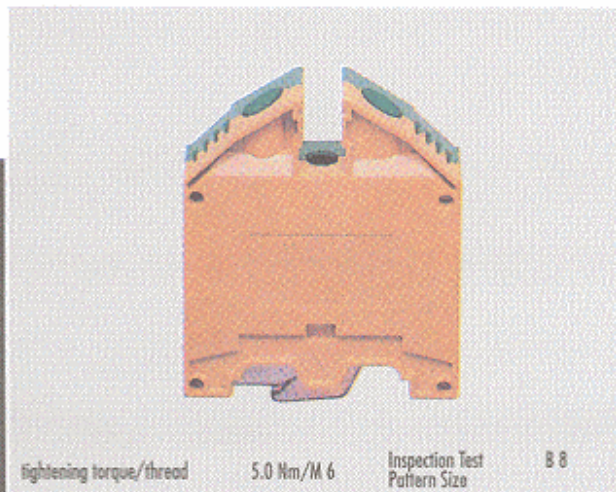


tightening torque/thread 5.0 Nm/M 6 Inspection Test Pattern Size B 8

Type Cat.-No. Qty.p.pck.
SRSL 35-T32 41198.2 green/yellow 20

Ratings:
Dimensions TS 32
 Lx8xH (mm) 58x16x76
 Stripped Length 20 mm
Max Rated Cross Section
 Single Wire (solid) 2.5-50 mm²
 Stranded Wire (flexible) 2.5-35 mm²
 Wire Size AWG 12-2

SRSL 16-T35

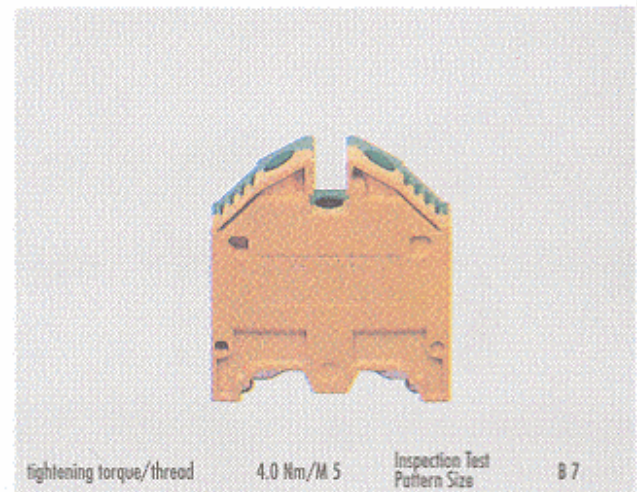

tightening torque/thread 4.0 Nm/M 5 Inspection Test Pattern Size B 7

Type Cat.-No. Qty.p.pck.
SRSL 16-T35 41197.2 green/yellow 50

Ratings:
Dimensions TS 35
 Lx8xH (mm) 56x12x58
 Stripped Length 12 mm
Max Rated Cross Section
 Single Wire (solid) 2.5-25 mm²
 Stranded Wire (flexible) 2.5-16 mm²
 Wire Size AWG 12-6

SRSL 16-T35