

## Excellent Integrated System Limited



Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[ITT Cannon, LLC](#)  
[CA3101R18-12PB](#)


For any questions, you can email us directly:

[sales@integrated-circuit.com](mailto:sales@integrated-circuit.com)

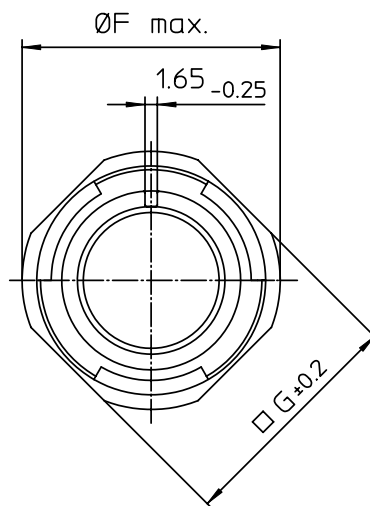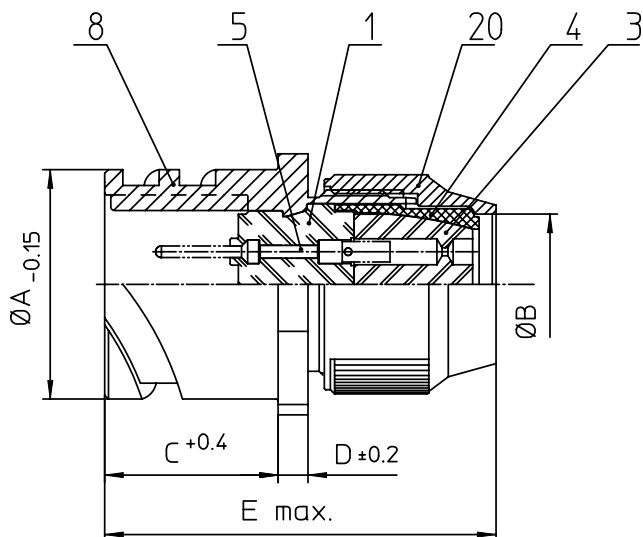

| NO. | MASSE / DIMENSION |
|-----|-------------------|
| A   | 30.8              |
| B   | 18.4              |
| C   | 23.05             |
| D   | 4                 |
| E   | 56                |
| F   | 34.8              |
| G   | 31.7              |

| NO. | BESCHREIBUNG / DESCRIPTION          |
|-----|-------------------------------------|
| 1   | ISOLIERKÖRPER STIFT / INSULATOR PIN |
| 3   | DICHTKÖRPER / GROMMET               |
| 4   | ENDRING / ENDRING                   |
| 5   | KONTAKTSTIFT / CONTACT PIN          |
| 8   | DOSENGEHÄUSE / SHELL                |
| 20  | KURZES ENDGEHÄUSE / SHORT ENDBELL   |



|                                                                                                    |
|----------------------------------------------------------------------------------------------------|
| Note: Due to an automatic nomenclature system, numbers generated may not be sequential.            |
| Specification and Dimensions subject to change<br>Drawings illustrate normal insulator positioning |
| Material Specification:                                                                            |
| Shell Material: Aluminium alloy                                                                    |
| Shell Plating: Olive drab chromate over cadmium (conductive)                                       |
| Insulator Material: CR-Elastomere                                                                  |
| Contact Material: Copper alloy                                                                     |
| Contact Plating: Hard silver                                                                       |

|                                                                                                                                                                           |                                                                                                                                                |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------|
| all dimensions are in mm<br>Dimensions without tolerance indications are general tolerances in acc. with DIN7168m                                                         | drawing for<br>CUSTOMER                                                                                                                        |
| <br><b>ITT</b><br>Engineered for life<br>ITT CANNON GmbH<br>D-71364 Wernau / Germany | description CA3101R18-12P-B<br>Cable connecting plug<br>Shortened light-weight endbell without cable clamp<br>Solder Cup / Pin / Layout: 18-12 |
| © All rights reserved. Reproduction or issue in third in any form whatever is only permitted with written authorization of ITT Cannon.                                    | page 1/1<br>revision 786 4, Jul 16                                                                                                             |