

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[TDK Corporation](#)


[VLF403212MT-100M-CA](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

VLF403212MT-100M-CA

Applications		Automotive Grade
Feature	 Wire Wound  Magnetic Shield  Ferrite Core  AEC-Q200	Wire Wound Magnetic Shield Ferrite Core AEC-Q200
Series	VLF-M Series / VLF403212MT-CA Type	
Status	PROD	

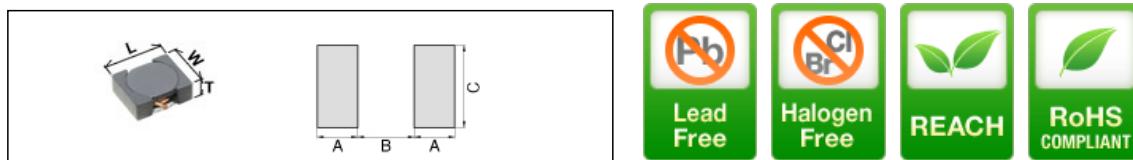


Size	
Length(L)	4.00mm +/-0.20mm
Width(W)	3.20mm +/-0.20mm
Thickness(T)	1.20mm Max.
Recommended Land Pattern (A)	1.10mm Nom.
Recommended Land Pattern (B)	1.30mm Nom.
Recommended Land Pattern (C)	1.80mm Nom.

Electrical Characteristics	
Inductance	10uH +/-20% at 1MHz
Rated Current (L Change) [Typ.]	1A (30% Down)
Rated Current (L Change) [Max.]	900mA (30% Down)
Rated Current (Temperature Rise) [Typ.]	1.07A (40degC Rise)
DC Resistance [Nom.]	230mΩ
DC Resistance [Max.]	280mΩ


Other	
Operating Temp. Range (Including Self-Temp. Rise)	-40 to 105degC
Soldering Method	Reflow
AEC Q200	Yes
Packing	Blister (Plastic)Taping [180mm Reel]
Package Quantity	1000Pcs Min.
Weight	0.059g

VLF403212MT-100M-CA


Characteristic Graphs (This is reference data, and does not guarantee the product's characteristics.)

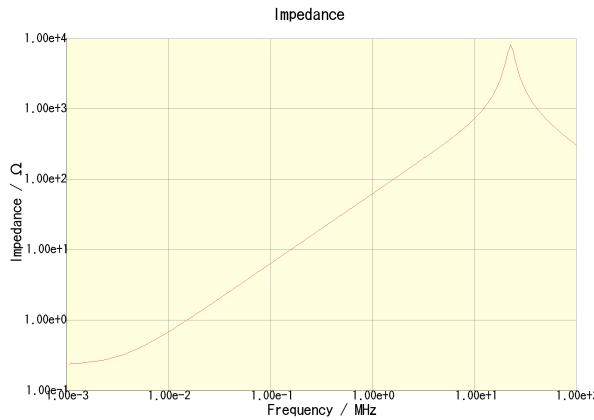


VLF403212MT-100M-CA

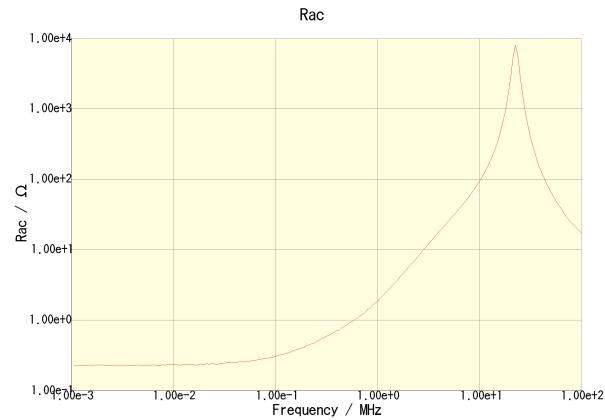

VLF403212MT-100M-CA

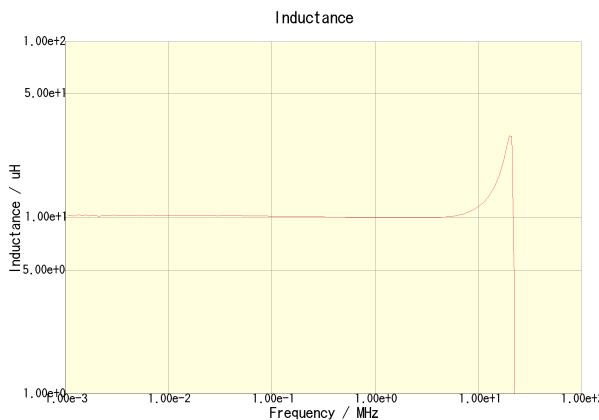



VLF403212MT-100M-CA

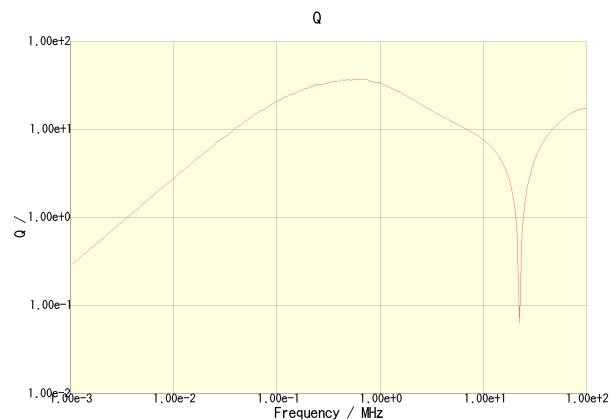

VLF403212MT-100M-CA

VLF403212MT-100M-CA

Characteristic Graphs (This is reference data, and does not guarantee the product's characteristics.)

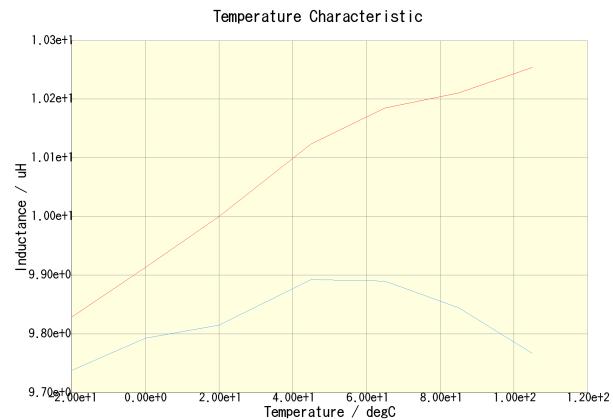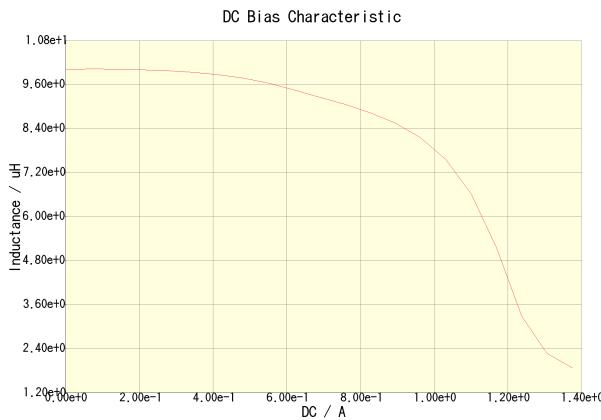

VLF403212MT-100M-CA(Amb. Temp. = 20degc)

VLF403212MT-100M-CA(DC = 0A) VLF403212MT-100M-CA(DC = 0.45A)

Temperature Rise by DC
no data available