

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:


[TDK Corporation](#)


[VLF504010MT-150M-CA](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

VLF504010MT-150M-CA

Applications		Automotive Grade
Feature	 Wire Wound  Magnetic Shield  Ferrite Core  AEC-Q200	Wire Wound Magnetic Shield Ferrite Core AEC-Q200
Series	VLF-M Series / VLF504010MT-CA Type	
Status	PROD	

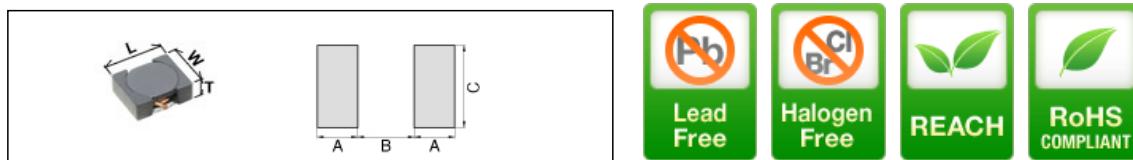


Size	
Length(L)	5.00mm +/-0.30mm
Width(W)	4.00mm +/-0.30mm
Thickness(T)	1.00mm Max.
Recommended Land Pattern (A)	1.30mm Nom.
Recommended Land Pattern (B)	1.60mm Nom.
Recommended Land Pattern (C)	2.20mm Nom.

Electrical Characteristics	
Inductance	15uH +/-20% at 1MHz
Rated Current (L Change) [Typ.]	830mA (30% Down)
Rated Current (L Change) [Max.]	740mA (30% Down)
Rated Current (Temperature Rise) [Typ.]	980mA (40degC Rise)
DC Resistance [Nom.]	330mΩ
DC Resistance [Max.]	400mΩ


Other	
Operating Temp. Range (Including Self-Temp. Rise)	-40 to 105degC
Soldering Method	Reflow
AEC Q200	Yes
Packing	Blister (Plastic)Taping [180mm Reel]
Package Quantity	1000Pcs Min.
Weight	0.073g

VLF504010MT-150M-CA


Characteristic Graphs (This is reference data, and does not guarantee the product's characteristics.)

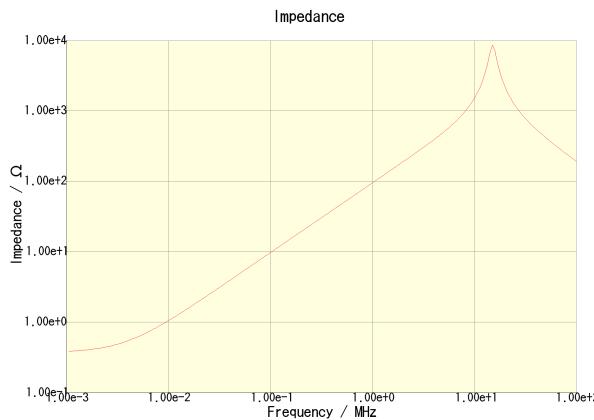


VLF504010MT-150M-CA

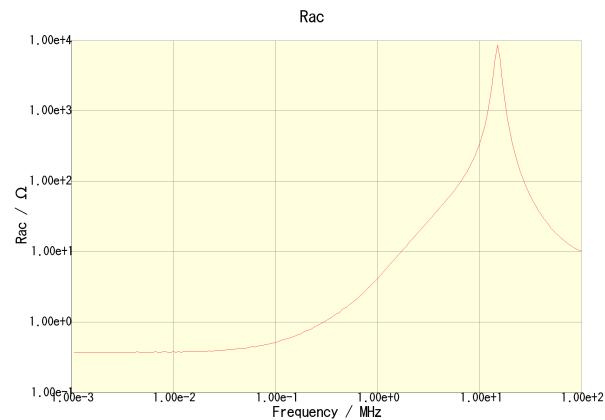

VLF504010MT-150M-CA

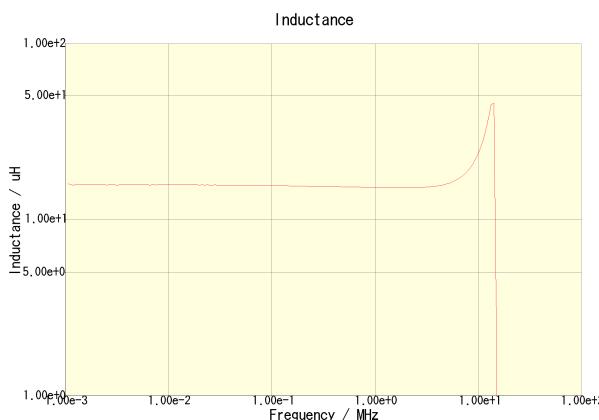


VLF504010MT-150M-CA

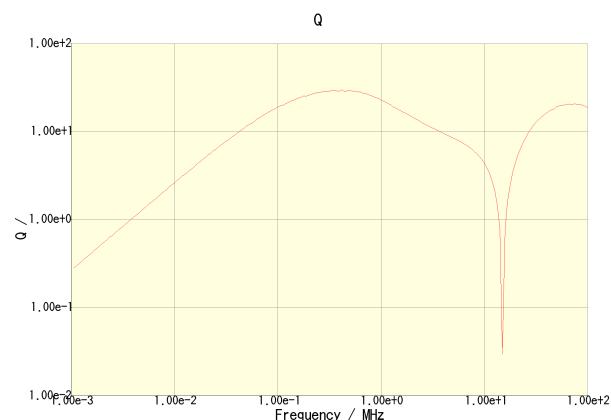

VLF504010MT-150M-CA

VLF504010MT-150M-CA

Characteristic Graphs (This is reference data, and does not guarantee the product's characteristics.)

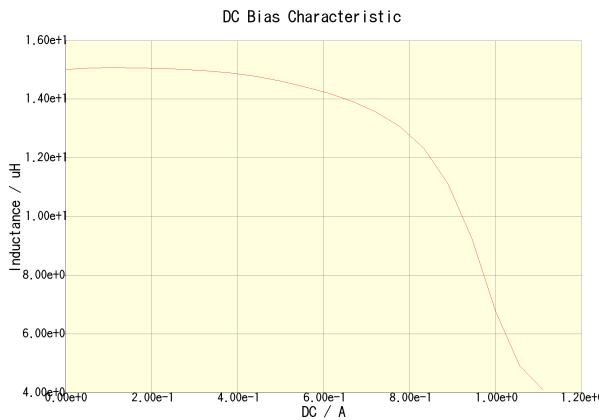


VLF504010MT-150M-CA(Amb. Temp. = 20degc)



VLF504010MT-150M-CA(DC = 0A)

VLF504010MT-150M-CA(DC = 0.37A)

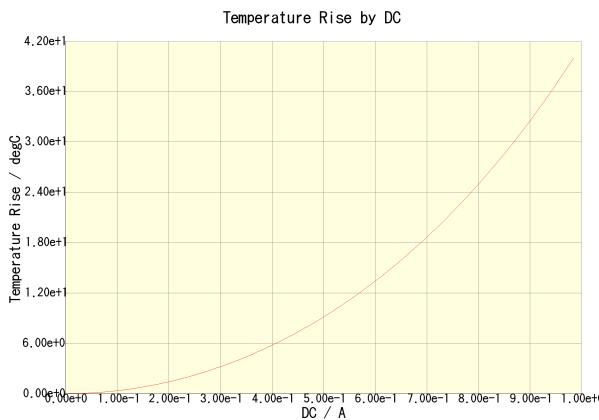

VLF504010MT-150M-CA(Amb. Temp. = 20degc)