

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Panasonic - BSG](#)
[HHR-70AA](#)


For any questions, you can email us directly:

sales@integrated-circuit.com

HHR70AA Cylindrical AA size (HR15/49)

N type

Dimensions (with tube) (mm)

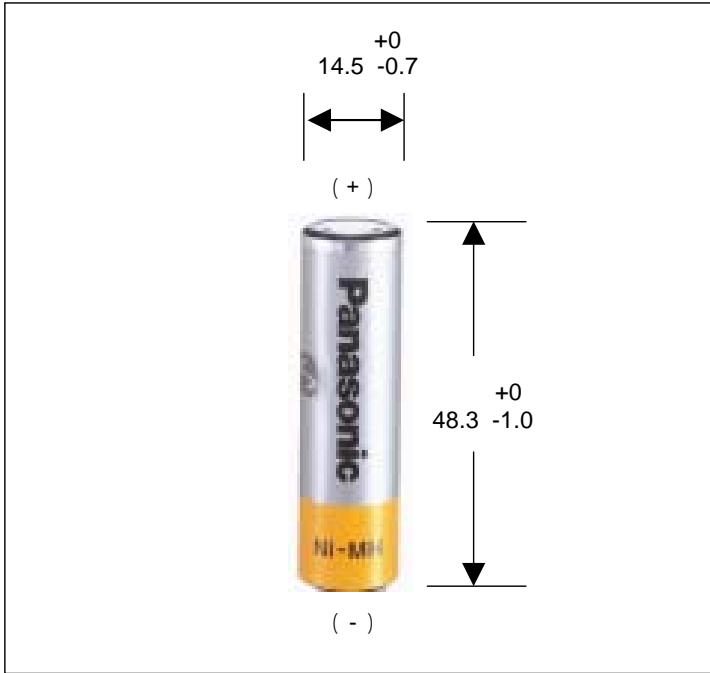


Diameter	14.5 + 0 / - 0.7 mm
Height	48.3 + 0 / - 1.0 mm
Approx.Weight	18g

Specifications

Nominal Voltage		1.2V
Discharge capacity *	Average **	780mAh
	Rated (min.)	700mAh
Approx.Internal impedance at 1000Hz at charged state.		25m
Charge	Standard	70mA × 16hrs.
	Rapid ***	700mA × 1.2hrs.
Ambient Temperature	Charge	Standard: 0 to 45 Rapid: 0 to 40
	Discharge	-10 to 65
Storage	< 1 year	-20 to 35
	< 6 months	-20 to 45
	< 1 month	-20 to 55

* After charging at 0.1It for 16 hours, discharging at 0.2It.
 ** For reference only.
 *** Need specially designed control system. Please contact Panasonic for details.

Typical charge characteristics

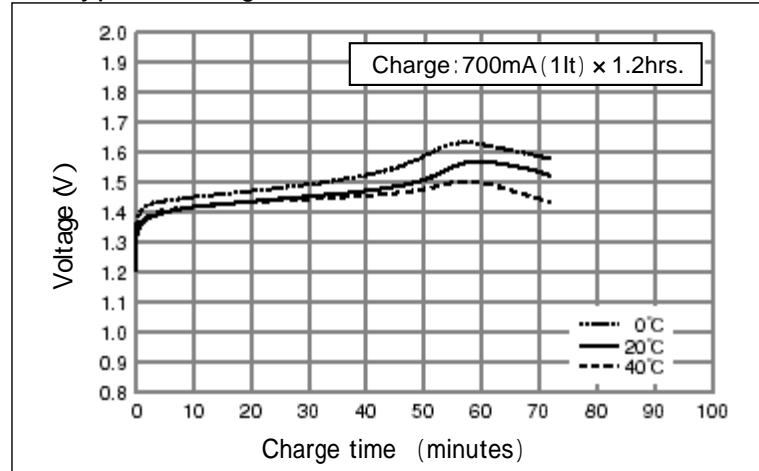

Typical discharge characteristics

