

Excellent Integrated System Limited

Stocking Distributor


Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Littelfuse](#)
[315-MAGNET](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

1. MATERIAL: ALNICO 5 SINTERED OR CAST
2. MAGNETIZATION LEVEL: SEE BELOW
3. MAGNETIZATION DIRECTION: PARALLEL TO LENGTH
4. DIMENSIONS: AS SHOWN
5. SQUARENESS: 1°
6. PACKING: PREFERRED METHOD IS SHRINK WRAPPED ON CARDBOARD FLATS; 100,500, OR 1000 PER FLAT; POLES ATTRACTING. OTHER METHODS MAY BE ACCEPTABLE WITH APPROVAL.

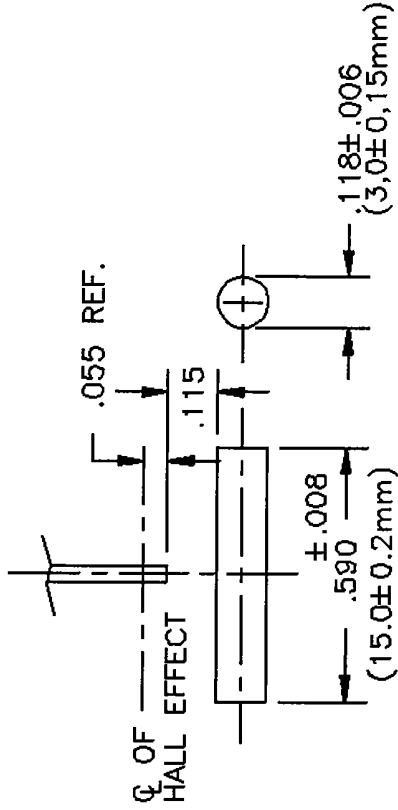

MAGNETIZATION LEVEL USING F.W. BELL METER 4048 AND TRANSVERSE PROBE #1706
 100 GAUSS MINIMUM MEASURED AT THE MAGNETS CENTER AT AN AIR GAP OF .115"
 PER ABOVE DRAWING. (TN-3931-C)

315 MAGNET

HAMLIN, Inc.

DCR No. 9387

AC	ADD PACKAGING	A6860	JC	2/18/98	JC	2/18/98	Dwn. GJ	DATE	2/15/84	250-70-400
REV.	DESCRIPTION OF REVISION	DCR No.	BY	DATE	APP.	DATE	App'd GJ	DATE	2/20/84	Page 1 of 1