

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Cinch Connectivity Solutions](#)
[RFI97-13](#)

For any questions, you can email us directly:

sales@integrated-circuit.com


RED INDICATES ORIGINAL

DATA CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO THOMPSON SUBMUNITIONS INC. AND SHALL NOT BE REPRODUCED, COPIED OR USED FOR PRODUCTION OR MANUFACTURING WITHOUT EXPRESS WRITTEN PERMISSION.			REVIEWS		1-0454	SH 10
REV	ED	DESCRIPTION	DWN	APPROVED	DATE	
D	12637	DELETED - 15 BRASS CHAIN ACCDED - 15, -18 AND SST ROPE SEE ECO	R L	W J	12/7/91	

DASH NO	DESCRIPTION
-1	CAP (NO CHAIN)
-2	CAP WITH 2.50 BRASS CHAIN
-3	CAP WITH 2.50 NYLON CHAIN
-4	CAP WITH 3.00 BRASS CHAIN
-5	CAP WITH 3.00 NYLON CHAIN
-6	CAP WITH 6.00 BRASS CHAIN
-7	CAP WITH 6.00 NYLON CHAIN
-8	CAP WITH 4.00 BRASS CHAIN
-9	CAP WITH 4.00 NYLON CHAIN
-10	CAP WITH 10.00 BRASS CHAIN
-11	CAP WITH 10.00 NYLON CHAIN
-12	CAP WITH 2.50 SST ROPE
-13	CAP WITH 3.00 SST ROPE
-14	CAP WITH 6.00 SST ROPE
-15	CAP WITH 4.00 SST ROPE
-18	CAP WITH 7.00 SST ROPE
-17	CAP WITH 4.50 SST ROPE




DASH NO	"A" DIA	"B" DIA	"C" DIM	"D" DIM
-01	.755	.875	1.101	.513
-02	.930	.750	1.066	.450
-03	.505	.625	.941	.388
-04	.439	.562	.878	.355
-05	.360	.500	.816	.325
-06	.317	.437	.753	.285
-07	.281	.406	.722	.278
-08	.610	.750	1.055	.450
-09	.587	.687	1.003	.419
-009	.730	.450	.298	.300

INCH	MM	INCH	MM	INCH	MM	INCH	MM
.005	0.13	.330	8.38	.507	14.40	.943	23.90
.010	0.25	.355	9.02	.602	15.29	1.009	25.68
.030	0.76	.380	9.65	.610	15.49	1.066	27.08
.032	0.81	.389	9.88	.625	15.88	1.091	27.71
.140	3.56	.408	10.31	.630	16.01	1.300	33.02
.200	5.08	.418	10.64	.687	17.45	1.382	34.96
.25	6.35	.437	11.10	.722	18.34	2.5	63.50
.278	7.06	.439	11.15	.750	19.05	3	76.20
.281	7.14	.450	11.43	.753	19.13	4	101.60
.280	7.37	.500	12.70	.755	19.18	4.50	114.30
.295	7.48	.505	12.83	.768	19.48	8.0	152.40
.300	7.62	.513	13.03	.816	20.73	7.00	177.80
.317	8.05	.565	14.22	.875	22.23	10.0	254.00
		.590	14.96	.875	22.23		

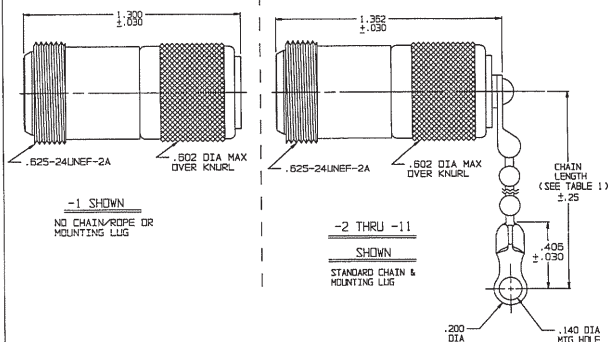

 NOTE THAT CHAIN LENGTH FOR SST ROPE WITH MOUNTING OPTION IS NOT MEASURED TO CENTER OF BULKHEAD MOUNTING LUG

4. EXAMPLE OF COMPLETE MODEL NO:
- RF197 - 2 - 01
- └───┬───┬───┘
- BASIC MODEL NO CHAIN/ROPE MAT'L & LENGTH (SEE TABLE 1) BULKHEAD JACK MOUNTING LUG (OPTIONAL) (SEE TABLE 2)
3. "N" SERIES RF1/DUST CAP WITH CHAIN OR JACKETED STAINLESS STEEL ROPE
2. FINISH: TFS-1A (NICKEL)
1. ALL DIMENSIONS ARE IN INCHES

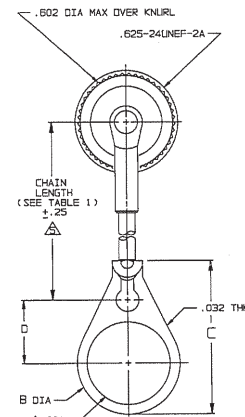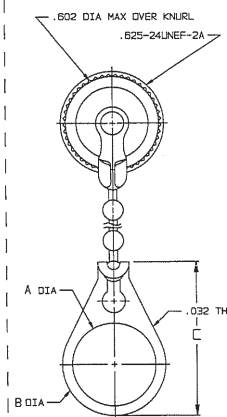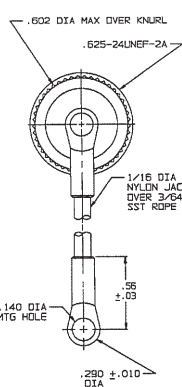

-12 THRU
-17 SHOWN
STAINLESS STEEL ROPE
AND MOUNTING LUG

-2-01 THRU -11-008

SHOWN

STANDARD CHAIN AND BULKHEAD
JACK MOUNTING LUG

-12-01 THRU
-17-008 SHOWN
SST ROPE AND BULKHEAD JACK
MOUNTING LUG

QTY	DESCRIPTION	PART NUMBER	ITE
10. UNLESS SPECIFIED X0K ± X0K 2.005 X000A X000X	 TROMPETER RF connectivity	RF197	
DWN R L 1/11/99			
CHK 72 1/23/99	MATERIAL	CODE IDENT	DRAWING NO.
ENGR		14949	1-0454
APPR	1/26/99	SCALE 4/1	DATE 6-12-79
			SHEET 1C