

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:





[Amphenol Pcd](#)
[TJM122607](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

TJM122607

REV	ECN	APP'D
-	5814	ET 4-13-06

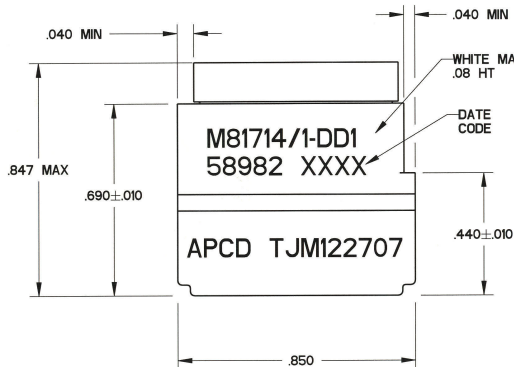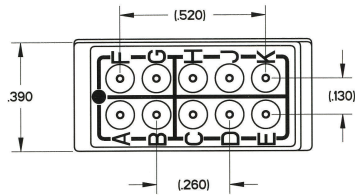

- NOTES:
- PERFORMANCE:
 - MEETS PERFORMANCE AND ENVIRONMENTAL REQUIREMENTS OF MIL-T-81714/1
 - MODULES ARE TO BE MOUNTED INTO RACK ASSEMBLY M81714/5 OR/16 OR COMMERCIAL EQUIVALENT.
 - DIELECTRIC WITHSTANDING VOLTAGE: 1500 VRMS AT SEA LEVEL, 200 VRMS AT 100,000 FEET.
 - OPERATING TEMPERATURE: -65 C TO 200 C.
 - CURRENT RATING: 5 AMPS
 - VIBRATION AND SHOCK: MIL-T-81714 PARAGRAPH 3.5.5 AND 3.5.8
 - MATERIALS:
 - HOUSING - POLYETHERIMIDE, COLOR: BLACK.
 - GROMMET - SILICONE ELASTOMER, COLOR: BLUE
 - INTERNAL CONTACTS - COPPER ALLOY, GOLD PLATED
 - CONTACT RETAINERS - STAINLESS STEEL

APCD P/N	SUPPLIED				MARKING		CLASS
	QTY	MIL. P/N	APCD P/N	QTY	APCD QPL NO.	MIL. NO	
TJM122607	-	-	-	-	-	-	-
TJM122707	11	M39029/1-100	CNP068000	2	CNA032401	TJM122707	M81714/1-DD1

DIMENSIONS	TOLERANCES	PROJECTION	Amphenol Pcd		TITLE		
			SPECIFICATION DRAWING		TERMINAL JUNCTION MODULE SZ 22 FEEDBACK, DD1		
ANSI Y14.5M UNITS: INCHES Pro/E FILE	XX ±0.01 XXX ±0.005 ANGLES ±2.0°		DRWN A. SWEEZEY 03/09/06	ENGR R. SWAINE 03/01/06	SIZE B	DWG NO. TJM122607	REV -
ORIGINAL	THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION WHICH IS THE CONFIDENTIAL PROPERTY OF AMPHENOL PCD INC., PEABODY, MA				CODE: 58982	SCALE: 3:1	SHEET 1 OF 1

Task Tm 4-13-06