

Excellent Integrated System Limited

Stocking Distributor


Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Amphenol Pcd](#)
[TJSE20707](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

| REV | ECN | APP'D |
|-----|------|-----------|
| - | 4057 | JT 8/7/00 |
| A | 4059 | JT 8/8/00 |
| B | - | AP 2/7/01 |

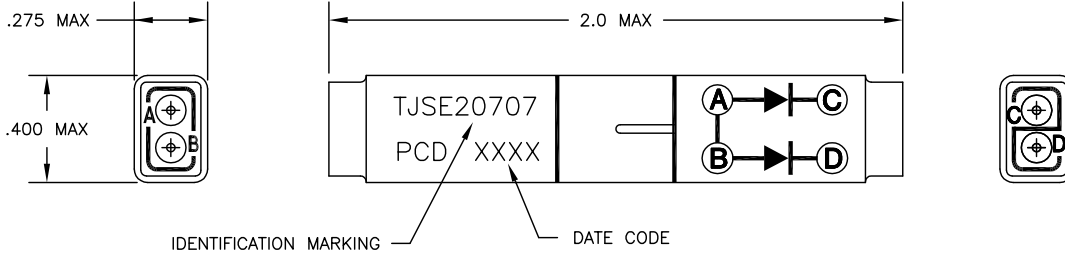

NOTES:

- MATERIALS-
 INSULATOR BODY: POLYETHERIMIDE PER MIL-P-46184
 SEALING GROMMET: SILICONE RUBBER PER ZZ-R-765
 INTERNAL CONTACTS: COPPER ALLOY, GOLD PLATE PER MIL-G-45204
 RETAINER CLIPS: BERYLLIUM COPPER
 DIODES: JANTX1N5622
- PART REQUIRES SIZE 16/20 PIN CONTACTS, M39029/1-101, SUPPLIED WITH DIRECT SHIPMENT
- PART MEETS ENVIRONMENTAL AND ELECTRICAL REQUIREMENTS PER MIL-T-81714 (SUBJECT TO LIMITATIONS OF INTERNAL DIODES)-
 TEMPERATURE: -65°C TO 200°C
 INSULATION RESISTANCE: 5000 MEGOHMS MIN @ 25°C
 DIELECTRIC WITHSTANDING VOLTAGE: 1500Vrms AT SEA LEVEL
 200Vrms AT 100,000 FT ALTITUDE
 CONTACT CURRENT RATING: 7.5 AMPS
 VIBRATION AND SHOCK: MIL-T-81714, PARAGRAPH 3.5.8 & 3.5.9

| | | | | | | | |
|---|--|----------------|----------------------------------|--|-------------|--|--------------|
| DIMENSIONS ANSI Y14.5M UNITS: INCHES ACAD FILE | TOLERANCES .XX ±.01 .XXX ±.005 ANGLES ±2° | PROJECTION | SPECIFICATION DRAWING | | | <i>TITLE</i> WIRE SPLICE, DOUBLE ELECTRONIC, DIODE SIZE 20, ANODE BUS | |
| | | | <i>ENGR</i> A. PATRIE 7/19/00 | | | | |
| ORIGINAL | THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION WHICH IS THE CONFIDENTIAL PROPERTY OF PCD, INC. PEABODY, MA, USA | | <i>CHKD</i> A. PATRIE 8/8/00 | | SIZE A | DWG NO. TJSE20707 | REV B |
| | | | <i>APPD</i> J. TON 8/8/00 | | CODE: 58982 | SCALE: 2X | SHEET 1 OF 1 |