

## Excellent Integrated System Limited

Stocking Distributor


Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Central Semiconductor Corp](#)  
[1N4104 TR](#)

For any questions, you can email us directly:

[sales@integrated-circuit.com](mailto:sales@integrated-circuit.com)

**1N4099 THRU 1N4135**  
**SILICON ZENER DIODE**  
**LOW NOISE**  
**6.8 VOLT THRU 100 VOLT**  
**250mW, 5% TOLERANCE**

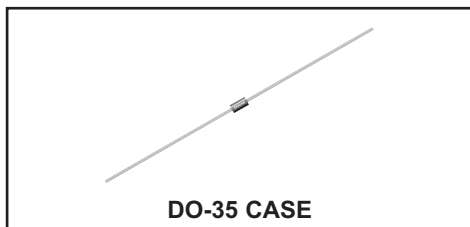

**DO-35 CASE**



[www.centrasemi.com](http://www.centrasemi.com)

**DESCRIPTION:**

The CENTRAL SEMICONDUCTOR 1N4099 series silicon Zener diode is designed for low leakage, low current, and low noise applications.

**MARKING: FULL PART NUMBER**

**MAXIMUM RATINGS:** (T<sub>A</sub>=25°C)

Power Dissipation

Operating and Storage Junction Temperature

**SYMBOL**

P<sub>D</sub>

T<sub>J</sub>, T<sub>stg</sub>

250

-65 to +200

**UNITS**

mW

°C

**ELECTRICAL CHARACTERISTICS:** (T<sub>A</sub>=25°C) V<sub>F</sub>=1.1V MAX @ I<sub>F</sub>=200mA (for all types)

TYPE	ZENER VOLTAGE V <sub>Z</sub> @ I <sub>ZT</sub>			TEST CURRENT	MAXIMUM ZENER IMPEDANCE	MAXIMUM REVERSE CURRENT		MAXIMUM ZENER CURRENT	MAXIMUM NOISE DENSITY
	MIN	NOM	MAX	I <sub>ZT</sub>	Z <sub>ZT</sub> @ I <sub>ZT</sub>	I <sub>R</sub> @	V <sub>R</sub>	I <sub>ZM</sub>	N <sub>D</sub> @ 250μA
	V	V	V	μA	Ω	μA	V	mA	μV/√Hz
1N4099	6.460	6.8	7.140	250	200	10	5.2	35.0	40
1N4100	7.125	7.5	7.875	250	200	10	5.7	31.8	40
1N4101	7.790	8.2	8.610	250	200	1.0	6.3	29.0	40
1N4102	8.265	8.7	9.135	250	200	1.0	6.7	27.4	40
1N4103	8.645	9.1	9.555	250	200	1.0	7.0	26.2	40
1N4104	9.50	10	10.50	250	200	1.0	7.6	24.8	40
1N4105	10.45	11	11.55	250	200	0.05	8.5	21.6	40
1N4106	11.40	12	12.60	250	200	0.05	9.2	20.4	40
1N4107	12.35	13	13.65	250	200	0.05	9.9	19.0	40
1N4108	13.30	14	14.70	250	200	0.05	10.7	17.5	40
1N4109	14.25	15	15.75	250	100	0.05	11.4	16.3	40
1N4110	15.20	16	16.80	250	100	0.05	12.2	15.4	40
1N4111	16.15	17	17.85	250	100	0.05	13.0	14.5	40
1N4112	17.10	18	18.90	250	100	0.05	13.7	13.2	40
1N4113	18.05	19	19.95	250	150	0.05	14.5	12.5	40
1N4114	19.00	20	21.00	250	150	0.01	15.2	11.9	40
1N4115	20.90	22	23.10	250	150	0.01	16.8	10.8	40
1N4116	22.80	24	25.20	250	150	0.01	18.3	9.9	40
1N4117	23.75	25	26.25	250	150	0.01	19.0	9.5	40
1N4118	25.65	27	28.35	250	150	0.01	20.5	8.8	40
1N4119	26.60	28	29.40	250	200	0.01	21.3	8.5	40
1N4120	28.50	30	31.50	250	200	0.01	22.8	7.9	40
1N4121	31.35	33	34.65	250	200	0.01	25.1	7.2	40

R1 (4-February 2014)


**1N4099 THRU 1N4135**  
  
**SILICON ZENER DIODE**  
**LOW NOISE**  
**6.8 VOLT THRU 100 VOLT**  
**250mW, 5% TOLERANCE**



**ELECTRICAL CHARACTERISTICS - Continued:** (T<sub>A</sub>=25°C) V<sub>F</sub>=1.1V MAX @ I<sub>F</sub>=200mA (for all types)

TYPE	ZENER VOLTAGE V <sub>Z</sub> @ I <sub>ZT</sub>			TEST CURRENT	MAXIMUM ZENER IMPEDANCE	MAXIMUM REVERSE CURRENT		MAXIMUM ZENER CURRENT	MAXIMUM NOISE DENSITY
	MIN	NOM	MAX	I <sub>ZT</sub>	Z <sub>ZT</sub> @ I <sub>ZT</sub>	I <sub>R</sub> @ V <sub>R</sub>		I <sub>ZM</sub>	N <sub>D</sub> @ 250μA
	V	V	V	μA	Ω	μA	V	mA	μV/√Hz
1N4122	34.20	36	37.80	250	200	0.01	27.4	6.6	40
1N4123	37.05	39	40.95	250	200	0.01	29.7	6.1	40
1N4124	40.85	43	45.15	250	250	0.01	32.7	5.5	40
1N4125	44.65	47	49.35	250	250	0.01	35.8	5.1	40
1N4126	48.45	51	53.55	250	300	0.01	38.8	4.6	40
1N4127	53.20	56	58.80	250	300	0.01	42.6	4.2	40
1N4128	57.00	60	63.00	250	400	0.01	45.6	4.0	40
1N4129	58.90	62	65.10	250	500	0.01	47.1	3.8	40
1N4130	64.60	68	71.40	250	700	0.01	51.7	3.5	40
1N4131	71.25	75	78.75	250	700	0.01	57.0	3.1	40
1N4132	77.90	82	86.10	250	800	0.01	62.4	2.9	40
1N4133	82.65	87	91.35	250	1.0K	0.01	66.2	2.7	40
1N4134	86.45	91	95.55	250	1.2K	0.01	69.2	2.6	40
1N4135	95.00	100	105.0	250	1.5K	0.01	76.0	2.3	40

**DO-35 CASE - MECHANICAL OUTLINE**

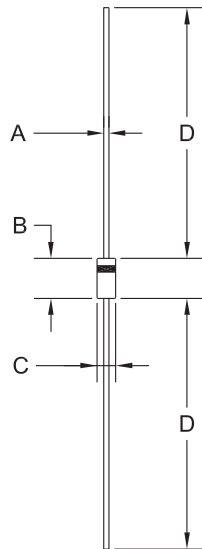

SYMBOL	DIMENSIONS			
	INCHES		MILLIMETERS	
	MIN	MAX	MIN	MAX
A	0.018	0.022	0.46	0.56
B	0.120	0.200	3.05	5.08
C	0.060	0.090	1.52	2.29
D	1.000	-	25.40	-

DO-35 (REV: R1)

**MARKING: FULL PART NUMBER**

R1

R1 (4-February 2014)

## OUTSTANDING SUPPORT AND SUPERIOR SERVICES



---

### PRODUCT SUPPORT

Central's operations team provides the highest level of support to insure product is delivered on-time.

- Supply management (Customer portals)
- Inventory bonding
- Consolidated shipping options
- Custom bar coding for shipments
- Custom product packing

---

### DESIGNER SUPPORT/SERVICES

Central's applications engineering team is ready to discuss your design challenges. Just ask.

- Free quick ship samples (2<sup>nd</sup> day air)
- Online technical data and parametric search
- SPICE models
- Custom electrical curves
- Environmental regulation compliance
- Customer specific screening
- Up-screening capabilities
- Special wafer diffusions
- PbSn plating options
- Package details
- Application notes
- Application and design sample kits
- Custom product and package development

---

### CONTACT US

#### Corporate Headquarters & Customer Support Team

Central Semiconductor Corp.  
145 Adams Avenue  
Hauppauge, NY 11788 USA  
Main Tel: (631) 435-1110  
Main Fax: (631) 435-1824  
Support Team Fax: (631) 435-3388  
[www.centrasemi.com](http://www.centrasemi.com)

**Worldwide Field Representatives:**  
[www.centrasemi.com/wwreps](http://www.centrasemi.com/wwreps)

**Worldwide Distributors:**  
[www.centrasemi.com/wwdistributors](http://www.centrasemi.com/wwdistributors)

---

For the latest version of Central Semiconductor's **LIMITATIONS AND DAMAGES DISCLAIMER**, which is part of Central's Standard Terms and Conditions of sale, visit: [www.centrasemi.com/terms](http://www.centrasemi.com/terms)