

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Central Semiconductor Corp](#)
[CMXD6001 TR](#)

For any questions, you can email us directly:
sales@integrated-circuit.com

CMXD6001
SURFACE MOUNT
TRIPLE ISOLATED
ULTRA LOW LEAKAGE
SILICON SWITCHING DIODES



www.centrasemi.com



DESCRIPTION:

The CENTRAL SEMICONDUCTOR CMXD6001 type contains three (3) Isolated Silicon Switching Diodes, manufactured by the epitaxial planar process, epoxy molded in a SUPERmini™ surface mount package, and designed for switching applications requiring extremely low leakage.

MARKING CODE: X01

MAXIMUM RATINGS: (T_A=25°C)

Continuous Reverse Voltage
 Peak Repetitive Reverse Voltage
 Continuous Forward Current
 Peak Repetitive Forward Current
 Peak Forward Surge Current, tp=1.0μs
 Peak Forward Surge Current, tp=1.0s
 Power Dissipation
 Operating and Storage Junction Temperature
 Thermal Resistance

SYMBOL

V_R 75
 V_{RRM} 100
 I_F 250
 I_{FRM} 250
 I_{FSM} 4.0
 I_{FSM} 1.0
 P_D 350
 T_J, T_{stg} -65 to +150
 Θ_{JA} 357

UNITS

V
 V
 mA
 mA
 A
 A
 mW
 °C
 °C/W


ELECTRICAL CHARACTERISTICS PER DIODE: (T_A=25°C unless otherwise noted)

| SYMBOL | TEST CONDITIONS | MIN | MAX | UNITS |
|-----------------|--|-----|------|-------|
| I _R | V _R =75V | | 500 | pA |
| BV _R | I _R =100μA | 100 | | V |
| V _F | I _F =1.0mA | | 0.85 | V |
| V _F | I _F =10mA | | 0.95 | V |
| V _F | I _F =100mA | | 1.1 | V |
| C _T | V _R =0, f=1.0MHz | | 2.0 | pF |
| t _{rr} | I _R =I _F =10mA, I _{rr} =1.0mA, R _L =100Ω | | 3.0 | μs |


CMXD6001
SURFACE MOUNT
TRIPLE ISOLATED
ULTRA LOW LEAKAGE
SILICON SWITCHING DIODES



SOT-26 CASE - MECHANICAL OUTLINE

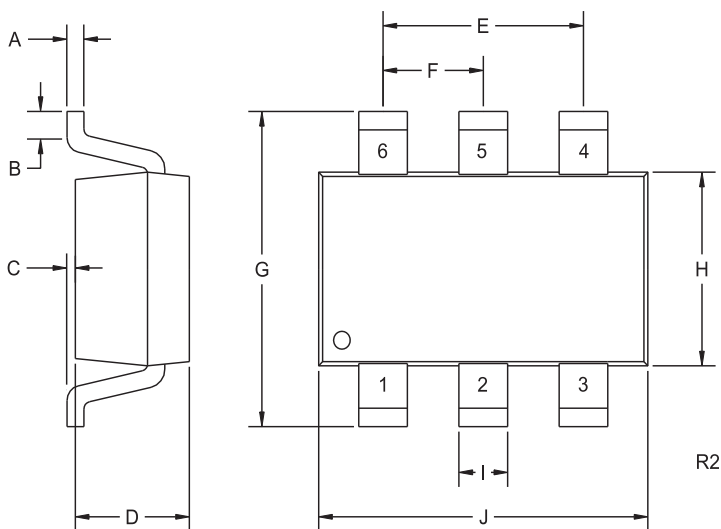

PIN CONFIGURATION



| SYMBOL | DIMENSIONS | | | |
|--------|------------|-------|-------------|------|
| | INCHES | | MILLIMETERS | |
| | MIN | MAX | MIN | MAX |
| A | 0.004 | 0.007 | 0.11 | 0.19 |
| B | 0.016 | - | 0.40 | - |
| C | - | 0.004 | - | 0.10 |
| D | 0.039 | 0.047 | 1.00 | 1.20 |
| E | 0.074 | 0.075 | 1.88 | 1.92 |
| F | 0.037 | 0.038 | 0.93 | 0.97 |
| G | 0.102 | 0.118 | 2.60 | 3.00 |
| H | 0.059 | 0.067 | 1.50 | 1.70 |
| I | 0.016 | | 0.41 | |
| J | 0.110 | 0.118 | 2.80 | 3.00 |

SOT-26 (REV: R2)

LEAD CODE:

- 1) Anode D1
- 2) Anode D2
- 3) Anode D3
- 4) Cathode D3
- 5) Cathode D2
- 6) Cathode D1

MARKING CODE: X01

R4 (9-May 2011)

OUTSTANDING SUPPORT AND SUPERIOR SERVICES



PRODUCT SUPPORT

Central's operations team provides the highest level of support to insure product is delivered on-time.

- Supply management (Customer portals)
- Inventory bonding
- Consolidated shipping options
- Custom bar coding for shipments
- Custom product packing

DESIGNER SUPPORT/SERVICES

Central's applications engineering team is ready to discuss your design challenges. Just ask.

- Free quick ship samples (2nd day air)
- Online technical data and parametric search
- SPICE models
- Custom electrical curves
- Environmental regulation compliance
- Customer specific screening
- Up-screening capabilities
- Special wafer diffusions
- PbSn plating options
- Package details
- Application notes
- Application and design sample kits
- Custom product and package development

CONTACT US

Corporate Headquarters & Customer Support Team

Central Semiconductor Corp.
145 Adams Avenue
Hauppauge, NY 11788 USA
Main Tel: (631) 435-1110
Main Fax: (631) 435-1824
Support Team Fax: (631) 435-3388
www.centrasemi.com

Worldwide Field Representatives:
www.centrasemi.com/wwreps

Worldwide Distributors:
www.centrasemi.com/wwdistributors

For the latest version of Central Semiconductor's **LIMITATIONS AND DAMAGES DISCLAIMER**, which is part of Central's Standard Terms and Conditions of sale, visit: www.centrasemi.com/terms