

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Johanson Technology Inc.](#)
[2345FB16A0100E](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

High Frequency Ceramic Solutions

2345 MHz Balun / Filter Combination

P/N 2345FB16A0100

Detail Specification: 12/15/09

Page 1 of 2


General Specifications

Part Number	2345FB16A0100
Frequency (MHz)	2300-2390
Unbalanced Impedance	50 Ω
Balanced Impedance	100 Ω
Insertion Loss	2.8 dB max.
Return Loss	9.5 dB min.
Phase Difference	180° $\pm$ 10
Amplitude Difference	1.0 dB max.

Attenuation (dB)	40 min. @ 760 ~ 800MHz
	30 min. @ 1500 ~ 1600MHz
	14 min. @ 3050 ~ 3200MHz
	23 min. @ 3800 ~ 4000MHz
Operating and Storage Temp.	-40 to +85°C
Reel Quantity	4,000
Power Capacity	0.5 watt max.


Mechanical Dimensions

	In	mm
L	0.079 $\pm$ 0.006	2.00 $\pm$ 0.15
W	0.059 $\pm$ 0.006	1.50 $\pm$ 0.15
T	0.035 $\pm$ 0.004	0.90 $\pm$ 0.10
a	0.012 $\pm$ 0.004	0.30 $\pm$ 0.10
b	0.028 $\pm$ 0.006	0.70 $\pm$ 0.15
c	0.010 $\pm$ 0.006	0.25 $\pm$ 0.15
d	0.031 $\pm$ 0.006	0.80 $\pm$ 0.15

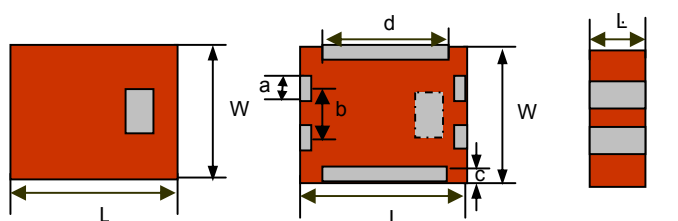


Mounting Considerations

* Line width should be designed to match 50 Ω characteristic impedance, depending on PCB material and thickness.

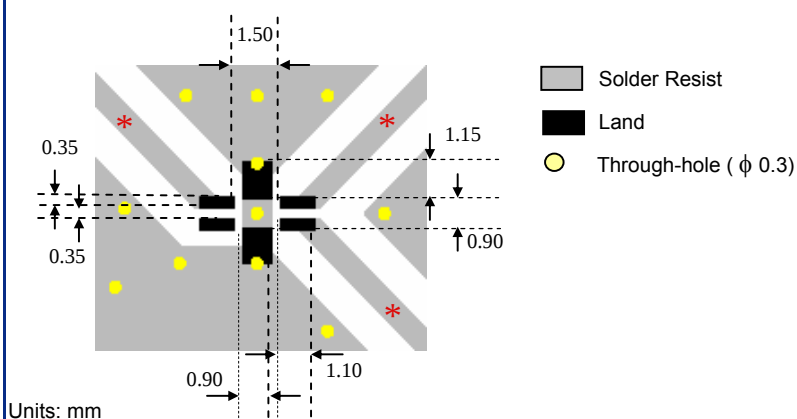

Terminal Configuration

No.	Function
1	Unbalanced Port
2	NC
3	Balanced Port
4	Balanced Port
5	GND
6	GND



Johanson Technology, Inc. reserves the right to make design changes without notice.
All sales are subject to Johanson Technology, Inc. terms and conditions.

High Frequency Ceramic Solutions


2345 MHz Balun / Filter Combination

P/N 2345FB16A0100

Detail Specification: 12/15/09

Page 2 of 2

Typical Electrical Performance (T=25°C)

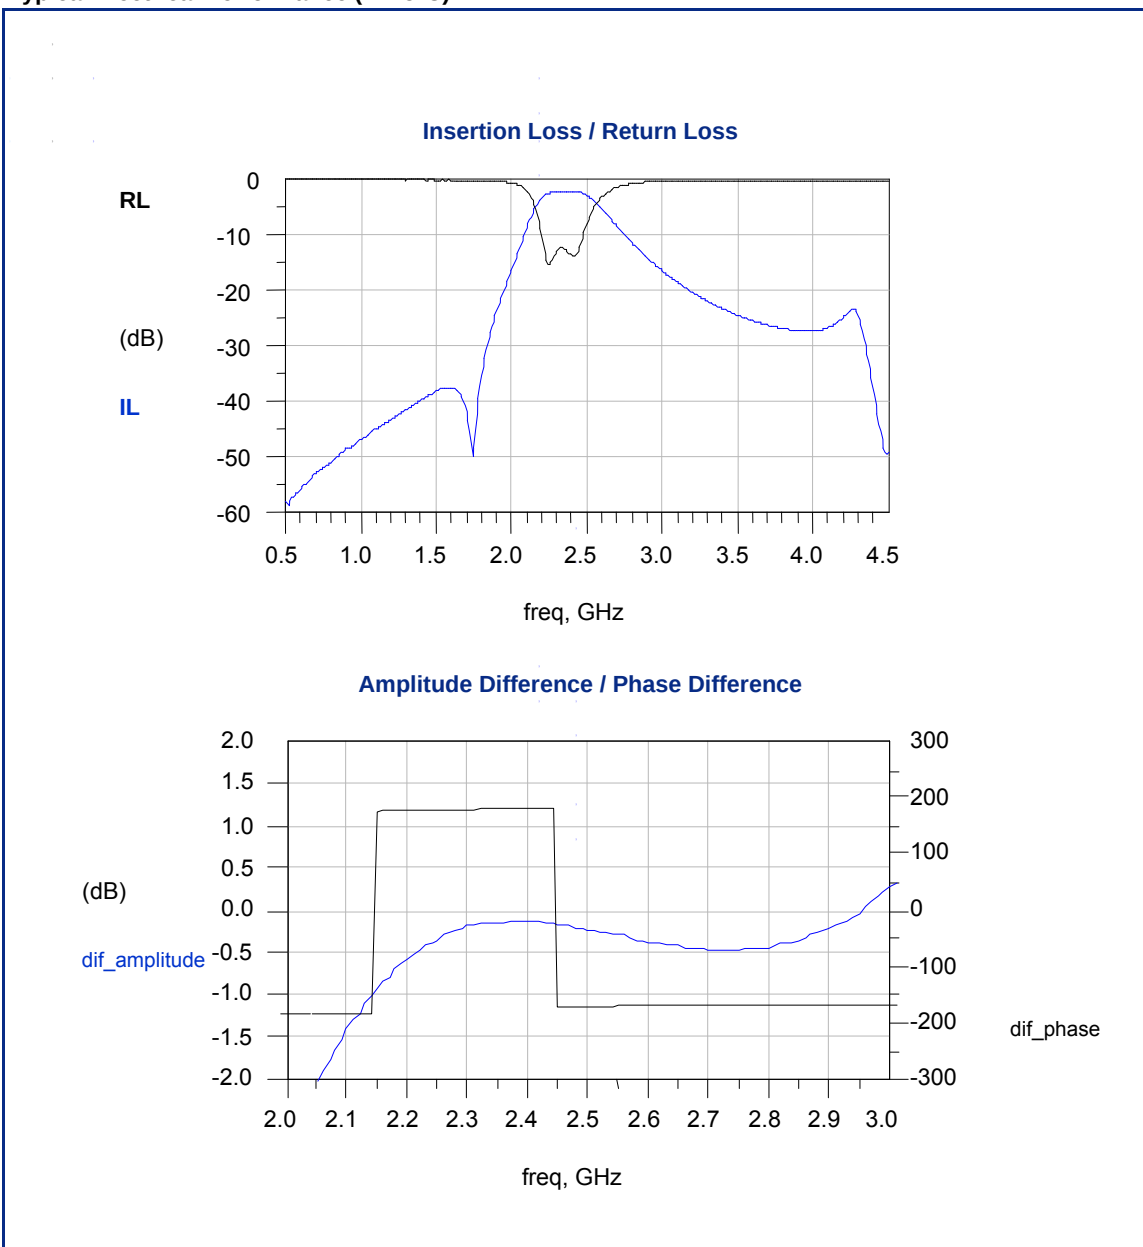

Johanson Technology, Inc. reserves the right to make design changes without notice.
All sales are subject to Johanson Technology, Inc. terms and conditions.