

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Johanson Technology Inc.](#)
[2500LP14B0400T](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

"High Frequency Ceramic Solutions"

2.5 GHz Low Pass Filter **P/N 2500LP14B0400**
 Detail Specification: 12/16/08 Page 1 of 2

General Specifications

Part Number	2500LP14B0400
Frequency (MHz)	2300 - 2700
Insertion Loss	0.62 dB max.
Return Loss	14.0 dB min.
Attenuation (min.)	27 dB @ 2 x fo
Attenuation (min.)	25 dB @ 3 x fo

Impedance	50 Ω
Reel Quantity	4,000
Input Power	2 Watts max.
Operating Temperature	-40 to +85°C
Storage Temperature	+5 to +35°C, Humidity: 45-75%RH, 12 mos. Max



Termination Style	100% Tin	Suffix = "None"	eg. 2500LP14A0400
	Tin / Lead	Suffix = "/Pb"	eg. 2500LP14A0400/Pb

Terminal Configuration

No.	Function
1	GND
2	IN
3	GND
4	GND
5	OUT
6	GND

Mechanical Dimensions

	In	mm
L	0.063 ± 0.004	1.60 ± 0.10
W	0.031 ± 0.004	0.80 ± 0.10
T	0.024 ± 0.004	0.60 ± 0.10
a	0.008 ± 0.004	0.20 ± 0.10
b	0.008 +.004/-0.006	0.20 +0.1/-0.15
c	0.006 ± 0.004	0.15 ± 0.10
g	0.012 ± 0.004	0.30 ± 0.10
p	0.020 ± 0.002	0.50 ± 0.05

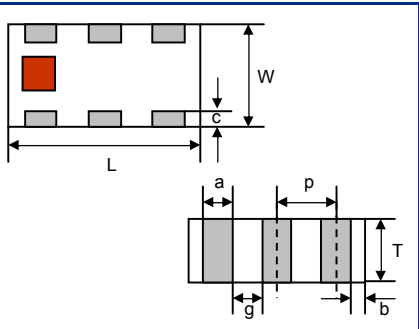

Mounting Considerations

Mount these devices with brown mark facing up.

- * Line width should be designed to provide 50 Ω impedance matching characteristics, depending on PCB material and thickness.
- ** DC Blocking capacitor is connected in series at each In/Out Port.

Units: mm

Johanson Technology, Inc. reserves the right to make design changes without notice.
 All sales are subject to Johanson Technology, Inc. terms and conditions.

"High Frequency Ceramic Solutions"


2.5 GHz Low Pass Filter

P/N 2500LP14B0400

Detail Specification: 12/16/08

Page 2 of 2

Typical Electrical Performance (T=25°C)

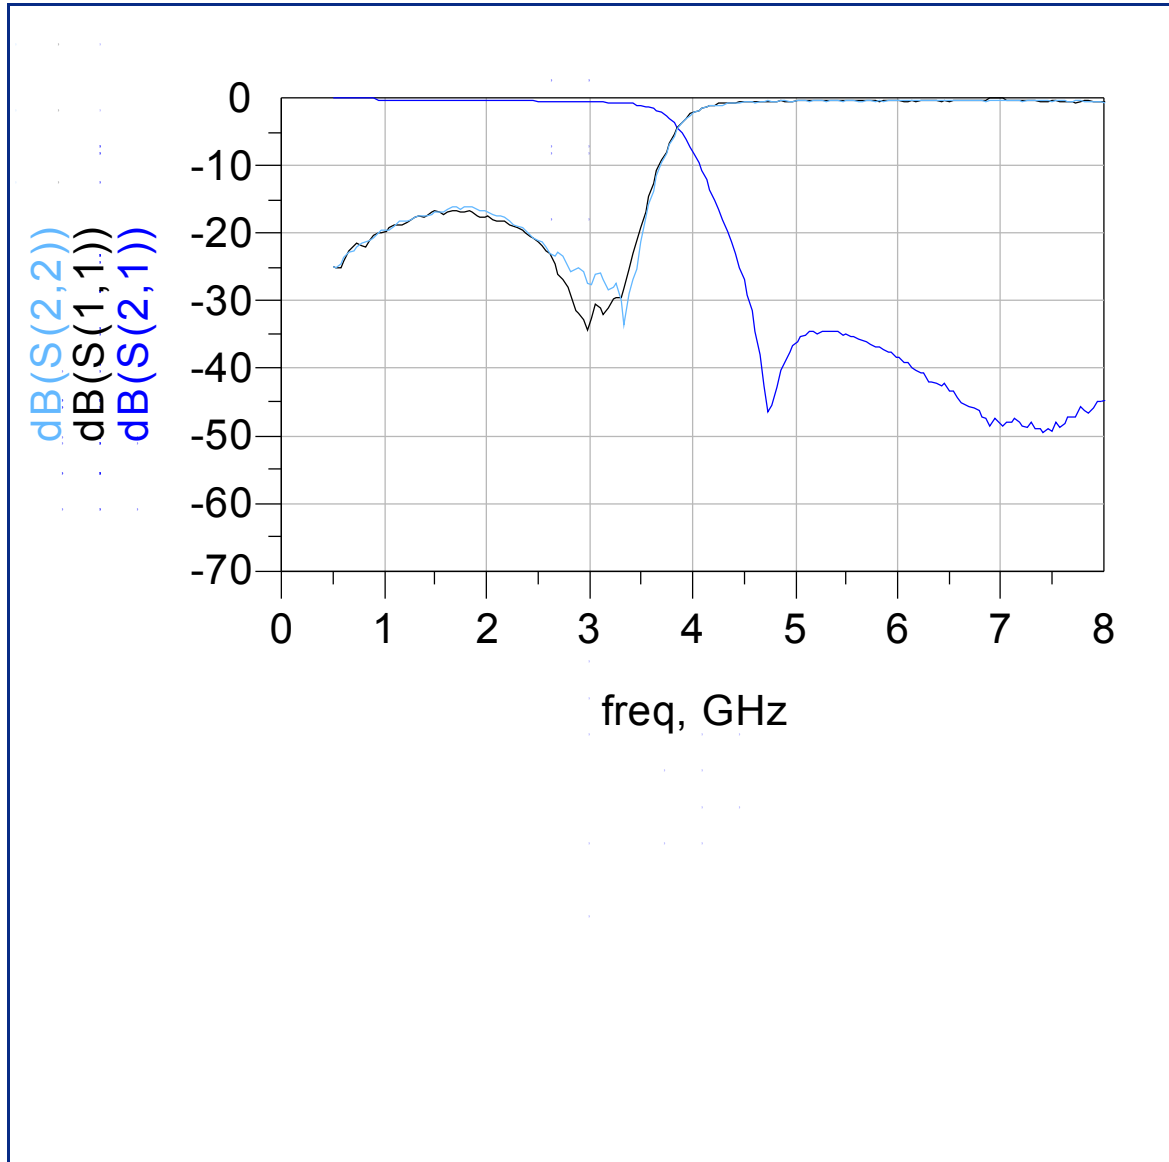

Johanson Technology, Inc. reserves the right to make design changes without notice.

All sales are subject to Johanson Technology, Inc. terms and conditions.

