

## **Excellent Integrated System Limited**

Stocking Distributor


Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Weidmüller](#)  
[1793160000](#)

For any questions, you can email us directly:

[sales@integrated-circuit.com](mailto:sales@integrated-circuit.com)

Product catalogue | PCB connection systems | PCB plug-in connectors | Pitch 3.81 mm (0.150 inch) | Plug connectors, solder connection, pitch 3.81 | SC 3.81/90 | SC 3.81/90G

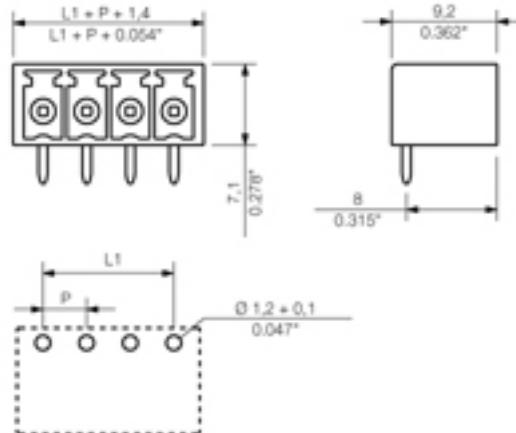

#### General ordering data

Order No.	1793160000
Part designation	SC 3.81/05/90G 3.2SN BK BX
Version	PCB plug-in connector, Male connectors, Soldered connection, Pitch: 3.81 mm, No. of poles: 5, 90°, Box
EAN	4032248227655
Qty.	50 pc(s).

#### System parameters

Fitted to PCB	Soldered connection
Outgoing elbow	90°
Pitch	3.81 mm
Pitch in inch	0.15 inch
No. of poles	5
Solder pin length	3.2 mm
Can be coded	Yes
No. of rows	1
No. of solder pins per pole	1
Dia. of fitting hole	1.2 mm
Fitting hole tolerance	+ 0.1 mm
L1 in mm	15.24 mm
L1 in inch	0.6 inch
Insulation resistance	1,000 MΩ
Electric shock protection to DIN VDE 0470	IP 20
Electric shock protection to DIN VDE 0470	Safe from finger touch

#### Material data

Insulating material	PA GF
Colour	black
colour chart	Similar to RAL 9011
Insulating material group	II
Flammability class UL 94	V-0
CTI	>= 475
Contact base material	Copper alloy

Product catalogue | PCB connection systems | PCB plug-in connectors | Pitch 3.81 mm (0.150 inch) | Plug connectors, solder connection, pitch 3.81 | SC 3.81/90 | SC 3.81/90G

**Material data**

Contact surface	tinned
Constant operating temp., min.	-25 °C
Constant operating temp., max.	120 °C
Storage temperature, min.	-25 °C
Storage temperature, max.	55 °C
Max. relative humidity during storage	93 %

**DIN IEC rating data**

Rated current, min. No. pins (Tu=20°C)	17.5 A
Rated current, min. No. pins(Tu=40°C)	17.5 A
Rated voltage for overvoltage class/pollution severity III/3	160 V
Rated impulse withstand voltage for overvoltage class/pollution severity III/3	2.5 kV
Rated voltage for overvoltage class/pollution severity III/2	160 V
Rated impulse withstand voltage for overvoltage class/pollution severity III/2	2.5 kV
Rated voltage for overvoltage class/pollution severity II/2	320 V
Rated impulse withstand voltage for overvoltage class/pollution severity II/2	2.5 kV
Short-time withstand current resistance	3 x 1s with 76 A

**CSA rating data**

Rated voltage (Use group D)	300 V
Rated current (Use group D)	10 A

**UL 1059 rating data**

Rated voltage (Use group D)	300 V
Rated current (Use group D)	10 A

**Approvals**

Approvals institutes


**Classifications**

eClass 4.1	27-26-07-01
eClass 5.0	27-26-07-01
eClass 5.1	27-26-07-04

**Similar products**

Order No.	Part designation	Version
1942020000	SC 3.81/02/90G 3.2SN OR BX	PCB plug-in connector, Male connectors, Soldered connection, Pitch: 3.81 mm, No. of poles: 2, 90°, Box

Product catalogue | PCB connection systems | PCB plug-in connectors | Pitch 3.81 mm (0.150 inch) | Plug connectors, solder connection, pitch 3.81 | SC 3.81/90 | SC 3.81/90G

1793130000	SC 3.81/02/90G 3.2SN BK BX	PCB plug-in connector, Male connectors, Soldered connection, Pitch: 3.81 mm, No. of poles: 2, 90°, Box
1793240000	SC 3.81/02/90G 3.2SN GN BX	PCB plug-in connector, Male connectors, Soldered connection, Pitch: 3.81 mm, No. of poles: 2, 90°, Box
1942040000	SC 3.81/03/90G 3.2SN OR BX	PCB plug-in connector, Male connectors, Soldered connection, Pitch: 3.81 mm, No. of poles: 3, 90°, Box
1793140000	SC 3.81/03/90G 3.2SN BK BX	PCB plug-in connector, Male connectors, Soldered connection, Pitch: 3.81 mm, No. of poles: 3, 90°, Box
1793250000	SC 3.81/03/90G 3.2SN GN BX	PCB plug-in connector, Male connectors, Soldered connection, Pitch: 3.81 mm, No. of poles: 3, 90°, Box
1942070000	SC 3.81/04/90G 3.2SN OR BX	PCB plug-in connector, Male connectors, Soldered connection, Pitch: 3.81 mm, No. of poles: 4, 90°, Box
1793150000	SC 3.81/04/90G 3.2SN BK BX	PCB plug-in connector, Male connectors, Soldered connection, Pitch: 3.81 mm, No. of poles: 4, 90°, Box
1793260000	SC 3.81/04/90G 3.2SN GN BX	PCB plug-in connector, Male connectors, Soldered connection, Pitch: 3.81 mm, No. of poles: 4, 90°, Box
1942090000	SC 3.81/05/90G 3.2SN OR BX	PCB plug-in connector, Male connectors, Soldered connection, Pitch: 3.81 mm, No. of poles: 5, 90°, Box
1793270000	SC 3.81/05/90G 3.2SN GN BX	PCB plug-in connector, Male connectors, Soldered connection, Pitch: 3.81 mm, No. of poles: 5, 90°, Box
1942100000	SC 3.81/06/90G 3.2SN OR BX	PCB plug-in connector, Male connectors, Soldered connection, Pitch: 3.81 mm, No. of poles: 6, 90°, Box
1793170000	SC 3.81/06/90G 3.2SN BK BX	PCB plug-in connector, Male connectors, Soldered connection, Pitch: 3.81 mm, No. of poles: 6, 90°, Box
1793280000	SC 3.81/06/90G 3.2SN GN BX	PCB plug-in connector, Male connectors, Soldered connection, Pitch: 3.81 mm, No. of poles: 6, 90°, Box
1942120000	SC 3.81/07/90G 3.2SN OR BX	PCB plug-in connector, Male connectors, Soldered connection, Pitch: 3.81 mm, No. of poles: 7, 90°, Box
1942350000	SC 3.81/07/90G 3.2SN BK BX	PCB plug-in connector, Male connectors, Soldered connection, Pitch: 3.81 mm, No. of poles: 7, 90°, Box
1942260000	SC 3.81/07/90G 3.2SN GN BX	PCB plug-in connector, Male connectors, Soldered connection, Pitch: 3.81 mm, No. of poles: 7, 90°, Box
1942130000	SC 3.81/08/90G 3.2SN OR BX	PCB plug-in connector, Male connectors, Soldered connection, Pitch: 3.81 mm, No. of poles: 8, 90°, Box
1793180000	SC 3.81/08/90G 3.2SN BK BX	PCB plug-in connector, Male connectors, Soldered connection, Pitch: 3.81 mm, No. of poles: 8, 90°, Box
1793290000	SC 3.81/08/90G 3.2SN GN BX	PCB plug-in connector, Male connectors, Soldered connection, Pitch: 3.81 mm, No. of poles: 8, 90°, Box
1942140000	SC 3.81/09/90G 3.2SN OR BX	PCB plug-in connector, Male connectors, Soldered connection, Pitch: 3.81 mm, No. of poles: 9, 90°, Box
1942360000	SC 3.81/09/90G 3.2SN BK BX	PCB plug-in connector, Male connectors, Soldered connection, Pitch: 3.81 mm, No. of poles: 9, 90°, Box
1942270000	SC 3.81/09/90G 3.2SN GN BX	PCB plug-in connector, Male connectors, Soldered connection, Pitch: 3.81 mm, No. of poles: 9, 90°, Box
1942150000	SC 3.81/10/90G 3.2SN OR BX	PCB plug-in connector, Male connectors, Soldered connection, Pitch: 3.81 mm, No. of poles: 10, 90°, Box
1793190000	SC 3.81/10/90G 3.2SN BK BX	PCB plug-in connector, Male connectors, Soldered connection, Pitch: 3.81 mm, No. of poles: 10, 90°, Box
1793300000	SC 3.81/10/90G 3.2SN GN BX	PCB plug-in connector, Male connectors, Soldered connection, Pitch: 3.81 mm, No. of poles: 10, 90°, Box
1942160000	SC 3.81/11/90G 3.2SN OR BX	PCB plug-in connector, Male connectors, Soldered connection, Pitch: 3.81 mm, No. of poles: 11, 90°, Box

Product catalogue | PCB connection systems | PCB plug-in connectors | Pitch 3.81 mm (0.150 inch) | Plug connectors, solder connection, pitch 3.81 | SC 3.81/90 | SC 3.81/90G

1942370000	SC 3.81/11/90G 3.2SN BK BX	PCB plug-in connector, Male connectors, Soldered connection, Pitch: 3.81 mm, No. of poles: 11, 90°, Box
1942280000	SC 3.81/11/90G 3.2SN GN BX	PCB plug-in connector, Male connectors, Soldered connection, Pitch: 3.81 mm, No. of poles: 11, 90°, Box
1942170000	SC 3.81/12/90G 3.2SN OR BX	PCB plug-in connector, Male connectors, Soldered connection, Pitch: 3.81 mm, No. of poles: 12, 90°, Box
1793200000	SC 3.81/12/90G 3.2SN BK BX	PCB plug-in connector, Male connectors, Soldered connection, Pitch: 3.81 mm, No. of poles: 12, 90°, Box
1793310000	SC 3.81/12/90G 3.2SN GN BX	PCB plug-in connector, Male connectors, Soldered connection, Pitch: 3.81 mm, No. of poles: 12, 90°, Box
1942180000	SC 3.81/13/90G 3.2SN OR BX	PCB plug-in connector, Male connectors, Soldered connection, Pitch: 3.81 mm, No. of poles: 13, 90°, Box
1942380000	SC 3.81/13/90G 3.2SN BK BX	PCB plug-in connector, Male connectors, Soldered connection, Pitch: 3.81 mm, No. of poles: 13, 90°, Box
1942290000	SC 3.81/13/90G 3.2SN GN BX	PCB plug-in connector, Male connectors, Soldered connection, Pitch: 3.81 mm, No. of poles: 13, 90°, Box
1942190000	SC 3.81/14/90G 3.2SN OR BX	PCB plug-in connector, Male connectors, Soldered connection, Pitch: 3.81 mm, No. of poles: 14, 90°, Box
1942390000	SC 3.81/14/90G 3.2SN BK BX	PCB plug-in connector, Male connectors, Soldered connection, Pitch: 3.81 mm, No. of poles: 14, 90°, Box
1808990000	SC 3.81/14/90G 3.2SN GN BX	PCB plug-in connector, Male connectors, Soldered connection, Pitch: 3.81 mm, No. of poles: 14, 90°, Box
1942200000	SC 3.81/15/90G 3.2SN OR BX	PCB plug-in connector, Male connectors, Soldered connection, Pitch: 3.81 mm, No. of poles: 15, 90°, Box
1942400000	SC 3.81/15/90G 3.2SN BK BX	PCB plug-in connector, Male connectors, Soldered connection, Pitch: 3.81 mm, No. of poles: 15, 90°, Box
1942300000	SC 3.81/15/90G 3.2SN GN BX	PCB plug-in connector, Male connectors, Soldered connection, Pitch: 3.81 mm, No. of poles: 15, 90°, Box
1942210000	SC 3.81/16/90G 3.2SN OR BX	PCB plug-in connector, Male connectors, Soldered connection, Pitch: 3.81 mm, No. of poles: 16, 90°, Box
1793210000	SC 3.81/16/90G 3.2SN BK BX	PCB plug-in connector, Male connectors, Soldered connection, Pitch: 3.81 mm, No. of poles: 16, 90°, Box
1793320000	SC 3.81/16/90G 3.2SN GN BX	PCB plug-in connector, Male connectors, Soldered connection, Pitch: 3.81 mm, No. of poles: 16, 90°, Box
1942220000	SC 3.81/17/90G 3.2SN OR BX	PCB plug-in connector, Male connectors, Soldered connection, Pitch: 3.81 mm, No. of poles: 17, 90°, Box
1942410000	SC 3.81/17/90G 3.2SN BK BX	PCB plug-in connector, Male connectors, Soldered connection, Pitch: 3.81 mm, No. of poles: 17, 90°, Box
1942310000	SC 3.81/17/90G 3.2SN GN BX	PCB plug-in connector, Male connectors, Soldered connection, Pitch: 3.81 mm, No. of poles: 17, 90°, Box
1942230000	SC 3.81/18/90G 3.2SN OR BX	PCB plug-in connector, Male connectors, Soldered connection, Pitch: 3.81 mm, No. of poles: 18, 90°, Box
1942420000	SC 3.81/18/90G 3.2SN BK BX	PCB plug-in connector, Male connectors, Soldered connection, Pitch: 3.81 mm, No. of poles: 18, 90°, Box
1942320000	SC 3.81/18/90G 3.2SN GN BX	PCB plug-in connector, Male connectors, Soldered connection, Pitch: 3.81 mm, No. of poles: 18, 90°, Box
1942240000	SC 3.81/19/90G 3.2SN OR BX	PCB plug-in connector, Male connectors, Soldered connection, Pitch: 3.81 mm, No. of poles: 19, 90°, Box
1942430000	SC 3.81/19/90G 3.2SN BK BX	PCB plug-in connector, Male connectors, Soldered connection, Pitch: 3.81 mm, No. of poles: 19, 90°, Box
1942330000	SC 3.81/19/90G 3.2SN GN BX	PCB plug-in connector, Male connectors, Soldered connection, Pitch: 3.81 mm, No. of poles: 19, 90°, Box

Product catalogue | PCB connection systems | PCB plug-in connectors | Pitch 3.81 mm (0.150 inch) | Plug connectors, solder connection, pitch 3.81 | SC 3.81/90 | SC 3.81/90G

1942250000	SC 3.81/20/90G 3.2SN OR BX	PCB plug-in connector, Male connectors, Soldered connection, Pitch: 3.81 mm, No. of poles: 20, 90°, Box
1942440000	SC 3.81/20/90G 3.2SN BK BX	PCB plug-in connector, Male connectors, Soldered connection, Pitch: 3.81 mm, No. of poles: 20, 90°, Box
1942340000	SC 3.81/20/90G 3.2SN GN BX	PCB plug-in connector, Male connectors, Soldered connection, Pitch: 3.81 mm, No. of poles: 20, 90°, Box