

## **Excellent Integrated System Limited**

Stocking Distributor

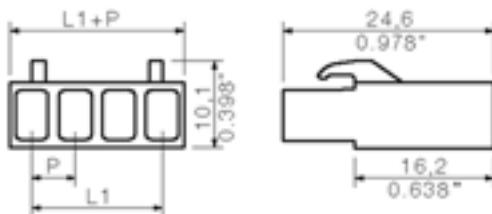
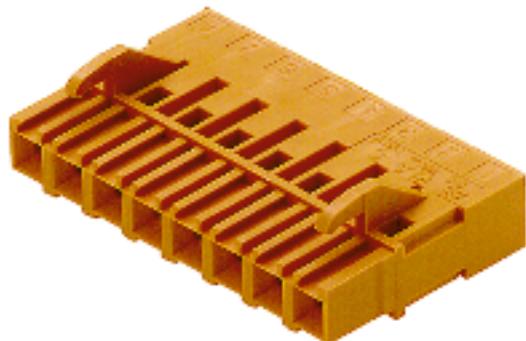
Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Weidmüller](#)  
[1478260000](#)

For any questions, you can email us directly:

[sales@integrated-circuit.com](mailto:sales@integrated-circuit.com)

Product catalogue | PCB connection systems | PCB plug-in connectors | Pitch 5.08 mm (0.200 inch) - SLA/BLA | Socket strips, crimp connection pitch 5.00/5.08 | BLAC | BLAC R

**General ordering data**

Order No.	1478260000
Part designation	BLAC 8R OR
Version	PCB plug-in connector, Female connectors, Crimp connection, Clamping range, max.: 2.5 mm <sup>2</sup> , Pitch: 5.08 mm, No. of poles: 8, 180°, Box
EAN	4008190107857
Qty.	50 pc(s).

**System parameters**

Conductor connection system	Crimp connection
Outgoing direction of conductor	180°
Pitch	5.08 mm
Pitch in inch	0.2 inch
No. of poles	8
No. of rows	1
Stripping length	5 mm
L1 in mm	35.56 mm
L1 in inch	1.4 inch
Electric shock protection to DIN VDE 0470	Finger-safe unplugged/ back-of-hand-safe plugged

**Material data**

Insulating material	PBT GF
---------------------	--------

Product catalogue | PCB connection systems | PCB plug-in connectors | Pitch 5.08 mm (0.200 inch) - SLA/BLA | Socket strips, crimp connection pitch 5.00/5.08 | BLAC | BLAC R

**Material data**

Colour	orange
colour chart	Similar to RAL 2000
Insulating material group	IIIa
Flammability class UL 94	V-0
Contact base material	Copper alloy

**Connectable conductors**

Clamping range, min.	0.22 mm <sup>2</sup>
Clamping range, max.	2.5 mm <sup>2</sup>
AWG, min.	26
AWG, max.	14

**DIN IEC rating data**

Rated current, min. No. pins (Tu=20°C)	20 A
Rated current, max. No. pins (Tu=20°C)	12.5 A
Rated current, min. No. pins (Tu=40°C)	17.5 A
Rated current, max. No. pins (Tu=40°C)	11 A
Rated voltage for overvoltage class/pollution severity II/2	500 V
Rated voltage for overvoltage class/pollution severity III/2	320 V
Rated voltage for overvoltage class/pollution severity III/3	250 V
Rated impulse withstand voltage for overvoltage class/pollution severity II/2	4 kV
Rated impulse withstand voltage for overvoltage class/pollution severity III/2	4 kV
Rated impulse withstand voltage for overvoltage class/pollution severity III/3	4 kV
Short-time withstand current resistance	3 x 1s with 120 A

**CSA rating data**

Rated voltage (Use group D)	300 V
Rated current (Use group D)	10 A
AWG conductor (field wiring), min.	26
AWG conductor (field wiring), max.	14

**UL 1059 rating data**

Rated voltage (Use group D)	300 V
Rated current (Use group D)	10 A
AWG conductor, min.	26
AWG conductor, max.	14

Product catalogue | PCB connection systems | PCB plug-in connectors | Pitch 5.08 mm (0.200 inch) - SLA/BLA | Socket strips, crimp connection pitch 5.00/5.08 | BLAC | BLAC R

### Approvals

Approvals institutes



### Classifications

ETIM 2.0	NK
ETIM 3.0	EC001284
eClass 4.1	27-26-07-01
eClass 5.0	27-26-07-01
eClass 5.1	27-26-07-04

### Similar products

Order No.	Part designation	Version
1578220000	BLAC 2R OR	PCB plug-in connector, Female connectors, Crimp connection, Clamping range, max.: 2.5 mm <sup>2</sup> , Pitch: 5.08 mm, No. of poles: 2, 180°, Box
1477960000	BLAC 3R OR	PCB plug-in connector, Female connectors, Crimp connection, Clamping range, max.: 2.5 mm <sup>2</sup> , Pitch: 5.08 mm, No. of poles: 3, 180°, Box
1478060000	BLAC 4R OR	PCB plug-in connector, Female connectors, Crimp connection, Clamping range, max.: 2.5 mm <sup>2</sup> , Pitch: 5.08 mm, No. of poles: 4, 180°, Box
1577480000	BLAC 5R OR	PCB plug-in connector, Female connectors, Crimp connection, Clamping range, max.: 2.5 mm <sup>2</sup> , Pitch: 5.08 mm, No. of poles: 5, 180°, Box
1478160000	BLAC 6R OR	PCB plug-in connector, Female connectors, Crimp connection, Clamping range, max.: 2.5 mm <sup>2</sup> , Pitch: 5.08 mm, No. of poles: 6, 180°, Box
1577490000	BLAC 7R OR	PCB plug-in connector, Female connectors, Crimp connection, Clamping range, max.: 2.5 mm <sup>2</sup> , Pitch: 5.08 mm, No. of poles: 7, 180°, Box
1577500000	BLAC 9R OR	PCB plug-in connector, Female connectors, Crimp connection, Clamping range, max.: 2.5 mm <sup>2</sup> , Pitch: 5.08 mm, No. of poles: 9, 180°, Box

Product catalogue | PCB connection systems | PCB plug-in connectors | Pitch 5.08 mm (0.200 inch) - SLA/BLA | Socket strips, crimp connection pitch 5.00/5.08 | BLAC | BLAC R

1478360000	BLAC 10R OR	PCB plug-in connector, Female connectors, Crimp connection, Clamping range, max.: 2.5 mm <sup>2</sup> , Pitch: 5.08 mm, No. of poles: 10, 180°, Box
1577510000	BLAC 11R OR	PCB plug-in connector, Female connectors, Crimp connection, Clamping range, max.: 2.5 mm <sup>2</sup> , Pitch: 5.08 mm, No. of poles: 11, 180°, Box
1478460000	BLAC 12R OR	PCB plug-in connector, Female connectors, Crimp connection, Clamping range, max.: 2.5 mm <sup>2</sup> , Pitch: 5.08 mm, No. of poles: 12, 180°, Box
1601120000	BLAC 13R OR	PCB plug-in connector, Female connectors, Crimp connection, Clamping range, max.: 2.5 mm <sup>2</sup> , Pitch: 5.08 mm, No. of poles: 13, 180°, Box
1594160000	BLAC 14R OR	PCB plug-in connector, Female connectors, Crimp connection, Clamping range, max.: 2.5 mm <sup>2</sup> , Pitch: 5.08 mm, No. of poles: 14, 180°, Box
1601130000	BLAC 15R OR	PCB plug-in connector, Female connectors, Crimp connection, Clamping range, max.: 2.5 mm <sup>2</sup> , Pitch: 5.08 mm, No. of poles: 15, 180°, Box
1478560000	BLAC 16R OR	PCB plug-in connector, Female connectors, Crimp connection, Clamping range, max.: 2.5 mm <sup>2</sup> , Pitch: 5.08 mm, No. of poles: 16, 180°, Box
1601140000	BLAC 17R OR	PCB plug-in connector, Female connectors, Crimp connection, Clamping range, max.: 2.5 mm <sup>2</sup> , Pitch: 5.08 mm, No. of poles: 17, 180°, Box
1601150000	BLAC 18R OR	PCB plug-in connector, Female connectors, Crimp connection, Clamping range, max.: 2.5 mm <sup>2</sup> , Pitch: 5.08 mm, No. of poles: 18, 180°, Box
1601160000	BLAC 19R OR	PCB plug-in connector, Female connectors, Crimp connection, Clamping range, max.: 2.5 mm <sup>2</sup> , Pitch: 5.08 mm, No. of poles: 19, 180°, Box
1478660000	BLAC 20R OR	PCB plug-in connector, Female connectors, Crimp connection, Clamping range, max.: 2.5 mm <sup>2</sup> , Pitch: 5.08 mm, No. of poles: 20, 180°, Box
1601170000	BLAC 21R OR	PCB plug-in connector, Female connectors, Crimp connection, Clamping range, max.: 2.5 mm <sup>2</sup> , Pitch: 5.08 mm, No. of poles: 21, 180°, Box
1601180000	BLAC 22R OR	PCB plug-in connector, Female connectors, Crimp connection, Clamping range, max.: 2.5 mm <sup>2</sup> , Pitch: 5.08 mm, No. of poles: 22, 180°, Box
1601190000	BLAC 23R OR	PCB plug-in connector, Female connectors, Crimp connection, Clamping range, max.: 2.5 mm <sup>2</sup> , Pitch: 5.08 mm, No. of poles: 23, 180°, Box
1478760000	BLAC 24R OR	PCB plug-in connector, Female connectors, Crimp connection, Clamping range, max.: 2.5 mm <sup>2</sup> , Pitch: 5.08 mm, No. of poles: 24, 180°, Box