

## Excellent Integrated System Limited

Stocking Distributor



Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Weidmüller](#)  
[1556860000](#)

For any questions, you can email us directly:

[sales@integrated-circuit.com](mailto:sales@integrated-circuit.com)

Product catalogue | PCB connection systems | PCB plug-in connectors | Pitch 5.00 / 5.08 mm (0.197 / 0.200 inch) | Socket connectors, tension clamp connection, pitch 5.00/5.08 | BLZ 5.00-5.08/90/270 | BLZ 5.08/90B

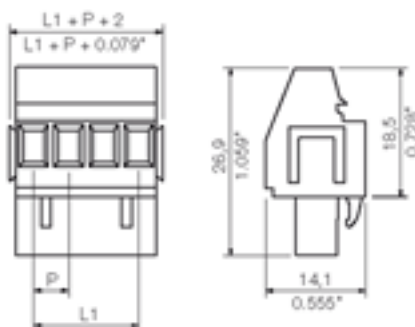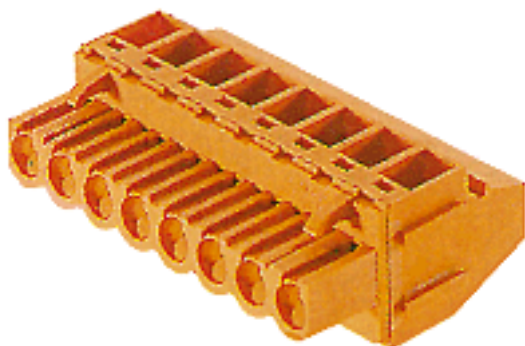

#### General ordering data

|                  |                                                                                                                                                                      |
|------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Order No.        | 1556860000                                                                                                                                                           |
| Part designation | BLZ 5.08/20/90B SN OR                                                                                                                                                |
| Version          | PCB plug-in connector, Female connectors,<br>Clamping yoke connection, Clamping range, max.:<br>3.31 mm <sup>2</sup> , Pitch: 5.08 mm, No. of poles: 20, 90°,<br>Box |
| EAN              | 4008190153335                                                                                                                                                        |
| Qty.             | 18 pc(s).                                                                                                                                                            |

#### System parameters

|                                           |                          |
|-------------------------------------------|--------------------------|
| Conductor connection system               | Clamping yoke connection |
| Outgoing direction of conductor           | 90°                      |
| Pitch                                     | 5.08 mm                  |
| Pitch in inch                             | 0.2 inch                 |
| No. of poles                              | 20                       |
| No. of rows                               | 1                        |
| Screwdriver blade                         | 0.6 x 3.5                |
| Screwdriver blade standard                | DIN 5264                 |
| Tightening torque, min.                   | 0.4 Nm                   |
| Tightening torque, max.                   | 0.5 Nm                   |
| Clamping screw                            | M 2.5                    |
| Stripping length                          | 7 mm                     |
| L1 in mm                                  | 96.52 mm                 |
| L1 in inch                                | 3.8 inch                 |
| Electric shock protection to DIN VDE 0470 | Safe from finger touch   |

#### Material data

|                           |                     |
|---------------------------|---------------------|
| Insulating material       | PBT                 |
| Colour                    | orange              |
| colour chart              | Similar to RAL 2000 |
| Insulating material group | IIIa                |
| Flammability class UL 94  | V-0                 |
| CTI                       | >= 200              |
| Contact base material     | Copper alloy        |

Product catalogue | PCB connection systems | PCB plug-in connectors | Pitch 5.00 / 5.08 mm (0.197 / 0.200 inch) |  
 Socket connectors, tension clamp connection, pitch 5.00/5.08 | BLZ 5.00-5.08/90/270 | BLZ 5.08/90B

#### Material data

Contact surface tinned

#### Connectable conductors

|                                                   |                         |
|---------------------------------------------------|-------------------------|
| Clamping range, min.                              | 0.13 mm <sup>2</sup>    |
| Clamping range, max.                              | 3.31 mm <sup>2</sup>    |
| AWG, min.                                         | 26                      |
| AWG, max.                                         | 12                      |
| Solid, min. H05(07) V-U                           | 0.2 mm <sup>2</sup>     |
| Solid, max. H05(07) V-U                           | 2.5 mm <sup>2</sup>     |
| Flexible, min. H05(07) V-K                        | 0.2 mm <sup>2</sup>     |
| Flexible, max. H05(07) V-K                        | 2.5 mm <sup>2</sup>     |
| With wire end ferrule, acc. to DIN 46 228/1, min. | 0.2 mm <sup>2</sup>     |
| With wire end ferrule, acc. to DIN 46 228/1, max. | 2.5 mm <sup>2</sup>     |
| w. plastic collar ferrule, DIN 46228 pt 4, min.   | 0.2 mm <sup>2</sup>     |
| w. plastic collar ferrule, DIN 46228 pt 4, max.   | 2.5 mm <sup>2</sup>     |
| Gauge to EN 60999 a x b; ø                        | 2.8 mm x 2.0 mm; 2.4 mm |

#### DIN IEC rating data

|                                                                                |                   |
|--------------------------------------------------------------------------------|-------------------|
| Rated current, min. No. pins (Tu=20°C)                                         | 15 A              |
| Rated current, max. No. pins (Tu=20°C)                                         | 12 A              |
| Rated current, min. No. pins (Tu=40°C)                                         | 12 A              |
| Rated current, max. No. pins (Tu=40°C)                                         | 10 A              |
| Rated voltage for overvoltage class/pollution severity II/2                    | 400 V             |
| Rated voltage for overvoltage class/pollution severity III/2                   | 320 V             |
| Rated voltage for overvoltage class/pollution severity III/3                   | 250 V             |
| Rated impulse withstand voltage for overvoltage class/pollution severity II/2  | 4 kV              |
| Rated impulse withstand voltage for overvoltage class/pollution severity III/2 | 4 kV              |
| Rated impulse withstand voltage for overvoltage class/pollution severity III/3 | 4 kV              |
| Short-time withstand current resistance                                        | 3 x 1s with 120 A |

#### CSA rating data

|                                    |       |
|------------------------------------|-------|
| Rated voltage (Use group D)        | 300 V |
| Rated current (Use group D)        | 10 A  |
| AWG conductor (field wiring), min. | 26    |
| AWG conductor (field wiring), max. | 12    |

#### UL 1059 rating data

|                             |       |
|-----------------------------|-------|
| Rated voltage (Use group D) | 300 V |
| Rated current (Use group D) | 10 A  |
| AWG conductor, min.         | 26    |
| AWG conductor, max.         | 12    |

Product catalogue | PCB connection systems | PCB plug-in connectors | Pitch 5.00 / 5.08 mm (0.197 / 0.200 inch) |  
Socket connectors, tension clamp connection, pitch 5.00/5.08 | BLZ 5.00-5.08/90/270 | BLZ 5.08/90B

## Approvals

Approvals institutes



## Classifications

|            |             |
|------------|-------------|
| ETIM 2.0   | NK          |
| ETIM 3.0   | EC001284    |
| eClass 4.1 | 27-26-07-01 |
| eClass 5.0 | 27-26-07-01 |
| eClass 5.1 | 27-26-07-04 |

## Similar products

| Order No.  | Part designation     | Version                                                                                                                                                    |
|------------|----------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1555060000 | BLZ 5.08/2/90B SN OR | PCB plug-in connector, Female connectors, Clamping yoke connection, Clamping range, max.: 3.31 mm <sup>2</sup> , Pitch: 5.08 mm, No. of poles: 2, 90°, Box |
| 1555010000 | BLZ 5.08/2/90B SN SW | PCB plug-in connector, Female connectors, Clamping yoke connection, Clamping range, max.: 3.31 mm <sup>2</sup> , Pitch: 5.08 mm, No. of poles: 2, 90°, Box |
| 1555160000 | BLZ 5.08/3/90B SN OR | PCB plug-in connector, Female connectors, Clamping yoke connection, Clamping range, max.: 3.31 mm <sup>2</sup> , Pitch: 5.08 mm, No. of poles: 3, 90°, Box |
| 1555110000 | BLZ 5.08/3/90B SN SW | PCB plug-in connector, Female connectors, Clamping yoke connection, Clamping range, max.: 3.31 mm <sup>2</sup> , Pitch: 5.08 mm, No. of poles: 3, 90°, Box |
| 1555260000 | BLZ 5.08/4/90B SN OR | PCB plug-in connector, Female connectors, Clamping yoke connection, Clamping range, max.: 3.31 mm <sup>2</sup> , Pitch: 5.08 mm, No. of poles: 4, 90°, Box |
| 1555210000 | BLZ 5.08/4/90B SN SW | PCB plug-in connector, Female connectors, Clamping yoke connection, Clamping range, max.: 3.31 mm <sup>2</sup> , Pitch: 5.08 mm, No. of poles: 4, 90°, Box |
| 1555360000 | BLZ 5.08/5/90B SN OR | PCB plug-in connector, Female connectors, Clamping yoke connection, Clamping range, max.: 3.31 mm <sup>2</sup> , Pitch: 5.08 mm, No. of poles: 5, 90°, Box |
| 1555310000 | BLZ 5.08/5/90B SN SW | PCB plug-in connector, Female connectors, Clamping yoke connection, Clamping range, max.: 3.31 mm <sup>2</sup> , Pitch: 5.08 mm, No. of poles: 5, 90°, Box |
| 1555460000 | BLZ 5.08/6/90B SN OR | PCB plug-in connector, Female connectors, Clamping yoke connection, Clamping range, max.: 3.31 mm <sup>2</sup> , Pitch: 5.08 mm, No. of poles: 6, 90°, Box |
| 1555560000 | BLZ 5.08/7/90B SN OR | PCB plug-in connector, Female connectors, Clamping yoke connection, Clamping range, max.: 3.31 mm <sup>2</sup> , Pitch: 5.08 mm, No. of poles: 7, 90°, Box |
| 1555660000 | BLZ 5.08/8/90B SN OR | PCB plug-in connector, Female connectors, Clamping yoke connection, Clamping range, max.: 3.31 mm <sup>2</sup> , Pitch: 5.08 mm, No. of poles: 8, 90°, Box |

Product catalogue | PCB connection systems | PCB plug-in connectors | Pitch 5.00 / 5.08 mm (0.197 / 0.200 inch) |  
 Socket connectors, tension clamp connection, pitch 5.00/5.08 | BLZ 5.00-5.08/90/270 | BLZ 5.08/90B

|            |                       |                                                                                                                                                             |
|------------|-----------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1555760000 | BLZ 5.08/9/90B SN OR  | PCB plug-in connector, Female connectors, Clamping yoke connection, Clamping range, max.: 3.31 mm <sup>2</sup> , Pitch: 5.08 mm, No. of poles: 9, 90°, Box  |
| 1555710000 | BLZ 5.08/9/90B SN SW  | PCB plug-in connector, Female connectors, Clamping yoke connection, Clamping range, max.: 3.31 mm <sup>2</sup> , Pitch: 5.08 mm, No. of poles: 9, 90°, Box  |
| 1555860000 | BLZ 5.08/10/90B SN OR | PCB plug-in connector, Female connectors, Clamping yoke connection, Clamping range, max.: 3.31 mm <sup>2</sup> , Pitch: 5.08 mm, No. of poles: 10, 90°, Box |
| 1555810000 | BLZ 5.08/10/90B SN SW | PCB plug-in connector, Female connectors, Clamping yoke connection, Clamping range, max.: 3.31 mm <sup>2</sup> , Pitch: 5.08 mm, No. of poles: 10, 90°, Box |
| 1555960000 | BLZ 5.08/11/90B SN OR | PCB plug-in connector, Female connectors, Clamping yoke connection, Clamping range, max.: 3.31 mm <sup>2</sup> , Pitch: 5.08 mm, No. of poles: 11, 90°, Box |
| 1556060000 | BLZ 5.08/12/90B SN OR | PCB plug-in connector, Female connectors, Clamping yoke connection, Clamping range, max.: 3.31 mm <sup>2</sup> , Pitch: 5.08 mm, No. of poles: 12, 90°, Box |
| 1556010000 | BLZ 5.08/12/90B SN SW | PCB plug-in connector, Female connectors, Clamping yoke connection, Clamping range, max.: 3.31 mm <sup>2</sup> , Pitch: 5.08 mm, No. of poles: 12, 90°, Box |
| 1556160000 | BLZ 5.08/13/90B SN OR | PCB plug-in connector, Female connectors, Clamping yoke connection, Clamping range, max.: 3.31 mm <sup>2</sup> , Pitch: 5.08 mm, No. of poles: 13, 90°, Box |
| 1556260000 | BLZ 5.08/14/90B SN OR | PCB plug-in connector, Female connectors, Clamping yoke connection, Clamping range, max.: 3.31 mm <sup>2</sup> , Pitch: 5.08 mm, No. of poles: 14, 90°, Box |
| 1556360000 | BLZ 5.08/15/90B SN OR | PCB plug-in connector, Female connectors, Clamping yoke connection, Clamping range, max.: 3.31 mm <sup>2</sup> , Pitch: 5.08 mm, No. of poles: 15, 90°, Box |
| 1556460000 | BLZ 5.08/16/90B SN OR | PCB plug-in connector, Female connectors, Clamping yoke connection, Clamping range, max.: 3.31 mm <sup>2</sup> , Pitch: 5.08 mm, No. of poles: 16, 90°, Box |
| 1556560000 | BLZ 5.08/17/90B SN OR | PCB plug-in connector, Female connectors, Clamping yoke connection, Clamping range, max.: 3.31 mm <sup>2</sup> , Pitch: 5.08 mm, No. of poles: 17, 90°, Box |
| 1556510000 | BLZ 5.08/17/90B SN SW | PCB plug-in connector, Female connectors, Clamping yoke connection, Clamping range, max.: 3.31 mm <sup>2</sup> , Pitch: 5.08 mm, No. of poles: 17, 90°, Box |
| 1556660000 | BLZ 5.08/18/90B SN OR | PCB plug-in connector, Female connectors, Clamping yoke connection, Clamping range, max.: 3.31 mm <sup>2</sup> , Pitch: 5.08 mm, No. of poles: 18, 90°, Box |
| 1556610000 | BLZ 5.08/18/90B SN SW | PCB plug-in connector, Female connectors, Clamping yoke connection, Clamping range, max.: 3.31 mm <sup>2</sup> , Pitch: 5.08 mm, No. of poles: 18, 90°, Box |
| 1556760000 | BLZ 5.08/19/90B SN OR | PCB plug-in connector, Female connectors, Clamping yoke connection, Clamping range, max.: 3.31 mm <sup>2</sup> , Pitch: 5.08 mm, No. of poles: 19, 90°, Box |
| 1556960000 | BLZ 5.08/21/90B SN OR | PCB plug-in connector, Female connectors, Clamping yoke connection, Clamping range, max.: 3.31 mm <sup>2</sup> , Pitch: 5.08 mm, No. of poles: 21, 90°, Box |

---

 Product catalogue | PCB connection systems | PCB plug-in connectors | Pitch 5.00 / 5.08 mm (0.197 / 0.200 inch) | Socket connectors, tension clamp connection, pitch 5.00/5.08 | BLZ 5.00-5.08/90/270 | BLZ 5.08/90B
 

---

|            |                       |                                                                                                                                                             |
|------------|-----------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1557060000 | BLZ 5.08/22/90B SN OR | PCB plug-in connector, Female connectors, Clamping yoke connection, Clamping range, max.: 3.31 mm <sup>2</sup> , Pitch: 5.08 mm, No. of poles: 22, 90°, Box |
| 1557160000 | BLZ 5.08/23/90B SN OR | PCB plug-in connector, Female connectors, Clamping yoke connection, Clamping range, max.: 3.31 mm <sup>2</sup> , Pitch: 5.08 mm, No. of poles: 23, 90°, Box |
| 1557260000 | BLZ 5.08/24/90B SN OR | PCB plug-in connector, Female connectors, Clamping yoke connection, Clamping range, max.: 3.31 mm <sup>2</sup> , Pitch: 5.08 mm, No. of poles: 24, 90°, Box |
| 1557210000 | BLZ 5.08/24/90B SN SW | PCB plug-in connector, Female connectors, Clamping yoke connection, Clamping range, max.: 3.31 mm <sup>2</sup> , Pitch: 5.08 mm, No. of poles: 24, 90°, Box |