

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[STMicroelectronics](#)
[STEVAL-IPR002V2](#)

For any questions, you can email us directly:


sales@integrated-circuit.com



STEVAL-IPR002V2

Data logger & event logger evaluation system based on the M24LR64E-R EEPROM

Data brief

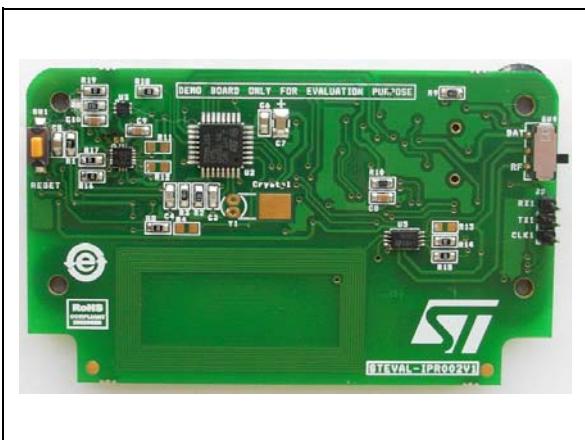

Features

- Demonstrates the dual communication interfaces (RF & I²C) of the M24LR64E-R EEPROM
- Records temperature, motion (MEMS), humidity and light (photo diode) parameters in a dual EEPROM
- Two operation modes:
 - RFID mode for reading and writing the EEPROM using an RFID kit (starter kit RFID reader)
 - I²C read and write using an STM8L microcontroller
- Utilizes a 20 mm x 40 mm inductive antenna for RF communication with starter kit RFID reader
- Includes a graphical user interface to evaluate the logged information from EEPROM
- RoHS compliant

Description

The STEVAL-IPR002V2 product evaluation board is based on the M24LR64E-R dual interface EEPROM which targets a wide range of applications such as industrial and medical equipment, and consumer electronics.

RFID (13.56 MHz) and I²C serial communication are the two interfaces available with EEPROM. This evaluation platform offers an autonomous battery-powered RFID tag with logging capability for recording and storing data from several sensors that measure temperature, humidity, vibration, free-fall, tamper and light.

The value from the various sensors is stored within the EEPROM, and then at later stages the logged values can be retrieved through an RFID interface for evaluation. This data logger can be attached to any transported article, allowing it to be tracked throughout the supply chain, and the data can be scanned at any point using an RFID reader.

This system can operate in two modes: data logger mode and event logger mode.

In data logger mode, the system reads all sensor values once per second, and stores it in the EEPROM. The system stops logging the data when the allocated memory for a particular sensor is full.


In event logger mode, the system configures the threshold limits for each sensor. When the sense value is outside the set threshold limits, it is stored in the EEPROM.

Schematic diagram

STEVAL-IPR002V2

1 Schematic diagram

Figure 1. STEVAL-IPR002V2 circuit schematic

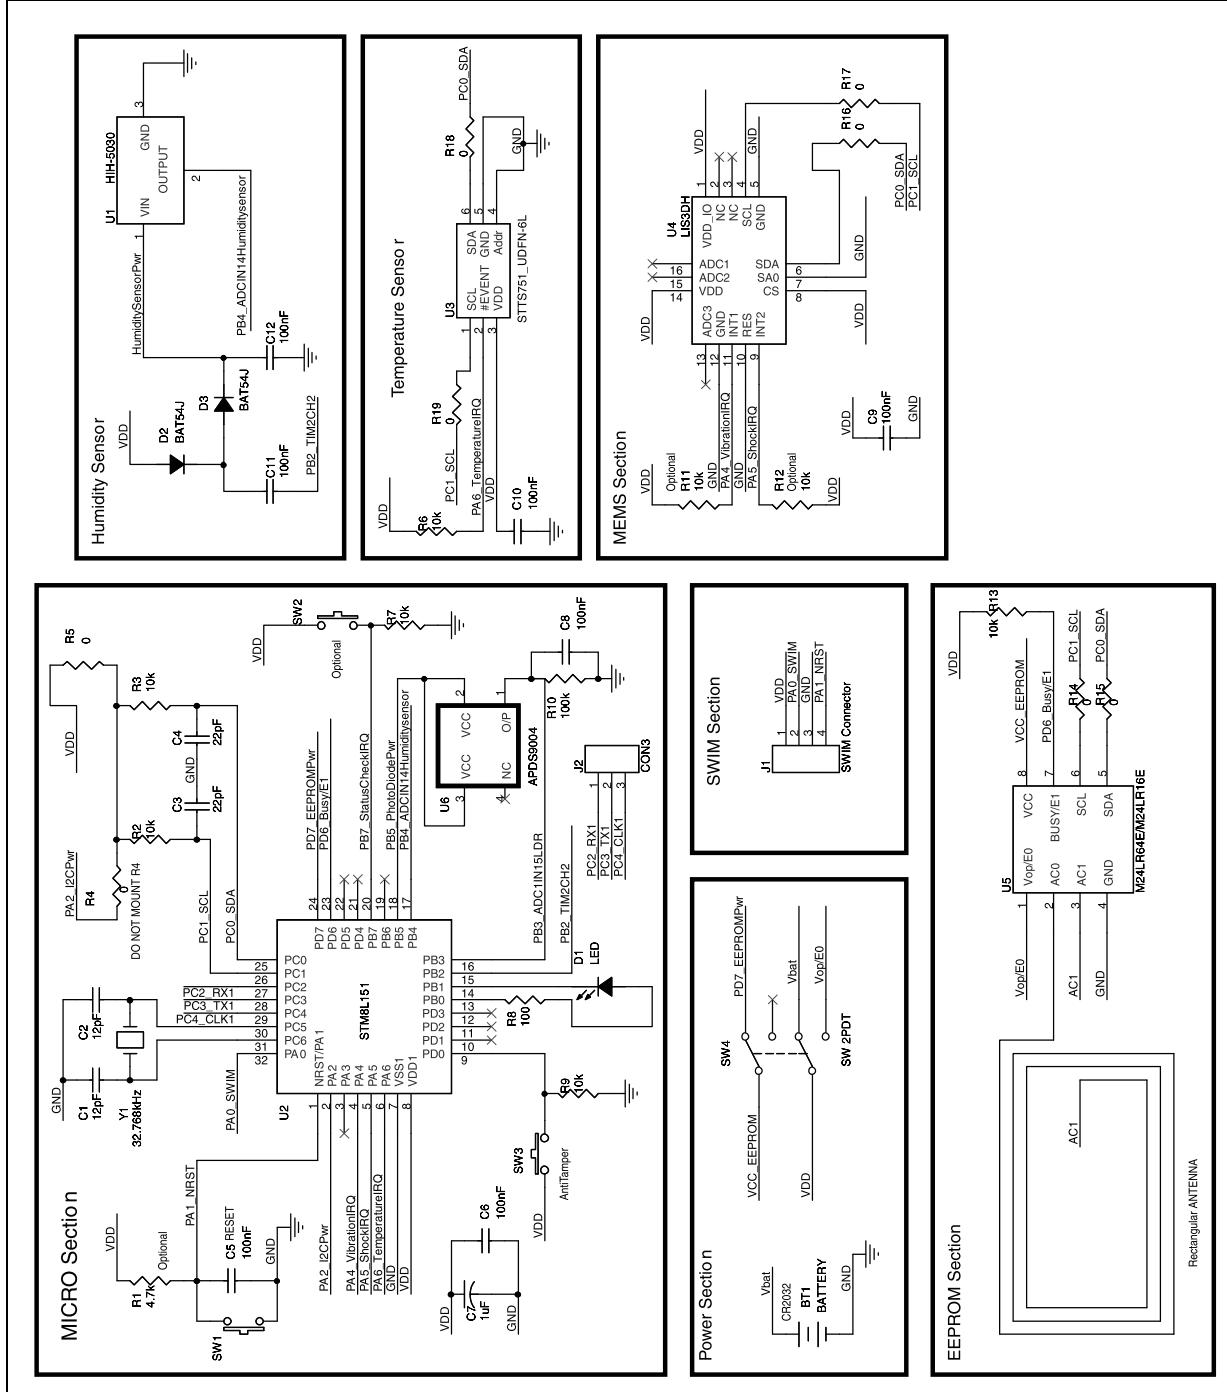

STEVAL-IPR002V2**Revision history****2 Revision history****Table 1. Document revision history**

Date	Revision	Changes
12-Mar-2014	1	Initial release.

STEVAL-IPR002V2**Please Read Carefully:**

Information in this document is provided solely in connection with ST products. STMicroelectronics NV and its subsidiaries ("ST") reserve the right to make changes, corrections, modifications or improvements, to this document, and the products and services described herein at any time, without notice.

All ST products are sold pursuant to ST's terms and conditions of sale.

Purchasers are solely responsible for the choice, selection and use of the ST products and services described herein, and ST assumes no liability whatsoever relating to the choice, selection or use of the ST products and services described herein.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted under this document. If any part of this document refers to any third party products or services it shall not be deemed a license grant by ST for the use of such third party products or services, or any intellectual property contained therein or considered as a warranty covering the use in any manner whatsoever of such third party products or services or any intellectual property contained therein.

UNLESS OTHERWISE SET FORTH IN ST'S TERMS AND CONDITIONS OF SALE ST DISCLAIMS ANY EXPRESS OR IMPLIED WARRANTY WITH RESPECT TO THE USE AND/OR SALE OF ST PRODUCTS INCLUDING WITHOUT LIMITATION IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE (AND THEIR EQUIVALENTS UNDER THE LAWS OF ANY JURISDICTION), OR INFRINGEMENT OF ANY PATENT, COPYRIGHT OR OTHER INTELLECTUAL PROPERTY RIGHT.

ST PRODUCTS ARE NOT DESIGNED OR AUTHORIZED FOR USE IN: (A) SAFETY CRITICAL APPLICATIONS SUCH AS LIFE SUPPORTING, ACTIVE IMPLANTED DEVICES OR SYSTEMS WITH PRODUCT FUNCTIONAL SAFETY REQUIREMENTS; (B) AERONAUTIC APPLICATIONS; (C) AUTOMOTIVE APPLICATIONS OR ENVIRONMENTS, AND/OR (D) AEROSPACE APPLICATIONS OR ENVIRONMENTS. WHERE ST PRODUCTS ARE NOT DESIGNED FOR SUCH USE, THE PURCHASER SHALL USE PRODUCTS AT PURCHASER'S SOLE RISK, EVEN IF ST HAS BEEN INFORMED IN WRITING OF SUCH USAGE, UNLESS A PRODUCT IS EXPRESSLY DESIGNATED BY ST AS BEING INTENDED FOR "AUTOMOTIVE, AUTOMOTIVE SAFETY OR MEDICAL" INDUSTRY DOMAINS ACCORDING TO ST PRODUCT DESIGN SPECIFICATIONS. PRODUCTS FORMALLY ESCC, QML OR JAN QUALIFIED ARE DEEMED SUITABLE FOR USE IN AEROSPACE BY THE CORRESPONDING GOVERNMENTAL AGENCY.

Resale of ST products with provisions different from the statements and/or technical features set forth in this document shall immediately void any warranty granted by ST for the ST product or service described herein and shall not create or extend in any manner whatsoever, any liability of ST.

ST and the ST logo are trademarks or registered trademarks of ST in various countries.

Information in this document supersedes and replaces all information previously supplied.

The ST logo is a registered trademark of STMicroelectronics. All other names are the property of their respective owners.

© 2014 STMicroelectronics - All rights reserved

STMicroelectronics group of companies

Australia - Belgium - Brazil - Canada - China - Czech Republic - Finland - France - Germany - Hong Kong - India - Israel - Italy - Japan - Malaysia - Malta - Morocco - Philippines - Singapore - Spain - Sweden - Switzerland - United Kingdom - United States of America

www.st.com