

## Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[SunLED](#)  
[XNZSFRS52WYSF14V02](#)

For any questions, you can email us directly:

[sales@integrated-circuit.com](mailto:sales@integrated-circuit.com)


**Features**

- Housing material: Type 66 Nylon
- Housing UL rating: 94V-0
- Reliable & robust
- 14V internal resistor.
- RoHS Compliant



**ATTENTION**  
 OBSERVE PRECAUTIONS  
 FOR HANDLING  
 ELECTROSTATIC  
 DISCHARGE  
 SENSITIVE  
 DEVICES

**Package Schematics**

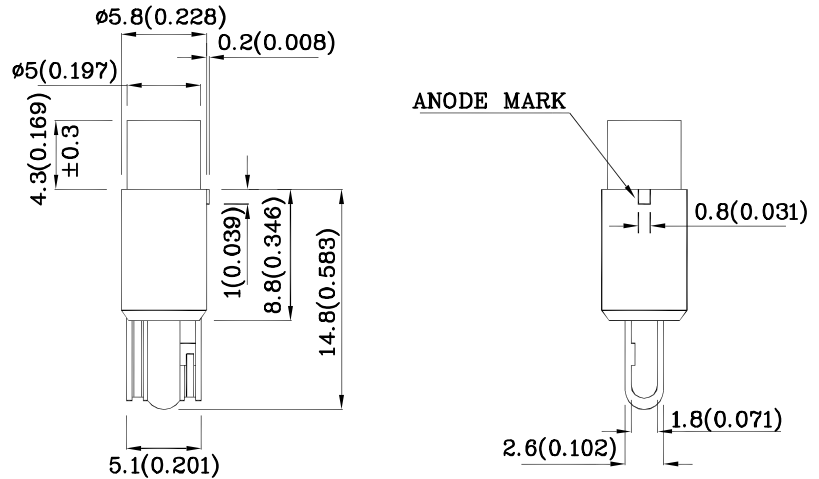

Notes:


1. All dimensions are in millimeters (inches).
2. Tolerance is  $\pm 0.25 (0.01)$  unless otherwise noted.
3. Specifications are subject to change without notice.

Absolute Maximum Ratings ( $T_A=25^\circ\text{C}$ )		FRS (InGaN)	Unit
Reverse Voltage	$V_R$	5	V
Forward Voltage	$V_F$	16	V
Power Dissipation	$P_D$	160	mW
Electrostatic Discharge Threshold (HBM)		250	V
Operating Temperature	$T_A$	-40 ~ +70	°C
Storage Temperature	$T_{stg}$	-40 ~ +85	
Lead Solder Temperature [2mm Below Package Base]	260°C For 3 Seconds		
Lead Solder Temperature [5mm Below Package Base]	260°C For 5 Seconds		




Operating Characteristics ( $T_A=25^\circ\text{C}$ )		FRS (InGaN)	Unit
Forward Voltage (Typ.) ( $I_F=14\text{V}$ )	$V_F$	8.5	mA
Forward Voltage (Max.) ( $I_F=14\text{V}$ )	$V_F$	12	mA
Reverse Current (Max.) ( $V_R=5\text{V}$ )	$I_R$	50	$\mu\text{A}$
Chromaticity Coordinates (Typ.)	x	0.51	
	y	0.42	

Part Number	Emitting Color	Emitting Material	Lens-color	Luminous Intensity CIE127-2007* ( $V_F=14\text{V}$ ) med		Viewing Angle 2 $\theta$ 1/2
				min.	typ.	
XNZSFRS52WYSF14V02	Incandescent	InGaN	Water Clear	250*	447*	70°


\*Luminous intensity value is in accordance with CIE127-2007 standards.

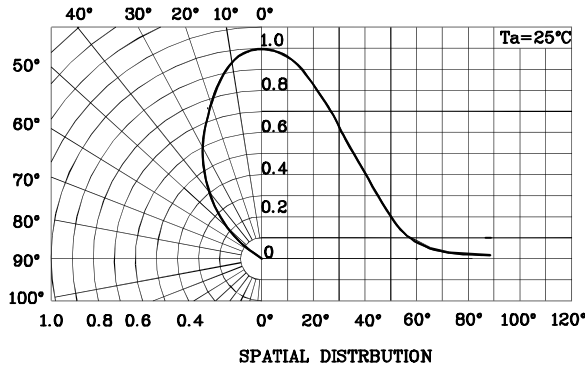

❖ **FRS**

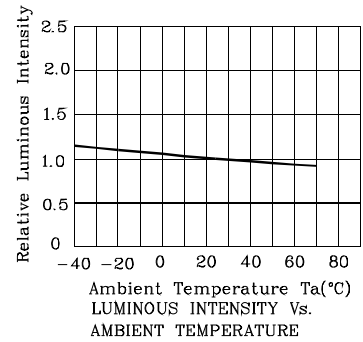

**Wave Soldering Profile For Thru-Hole Products (Pb-Free Components)**

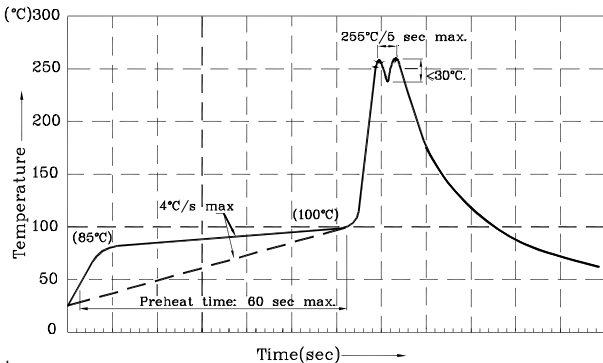

- Notes:
1. Recommend pre-heat temperature of 105°C or less (as measured with a thermocouple attached to the LED pins) prior to immersion in the solder wave with a maximum solder bath temperature of 260°C
  2. Peak wave soldering temperature between 245°C ~ 255°C for 3 sec (5 sec max).
  3. Do not apply stress to the epoxy resin while the temperature is above 85°C.
  4. Fixtures should not incur stress on the component when mounting and during soldering process.
  5. SAC 305 solder alloy is recommended.
  6. No more than one wave soldering pass.

**Remarks:**


If special sorting is required (e.g. binning based on forward voltage, Luminous intensity / luminous flux, or chromaticity), the typical accuracy of the sorting process is as follows:

1. Measurement tolerance of the chromaticity coordinates is  $\pm 0.02$ .
2. Luminous Intensity / Luminous Flux:  $\pm 15\%$

Note: Accuracy may depend on the sorting parameters.

**XNZSFRS52WYSF14V02**


**CIE 1931**

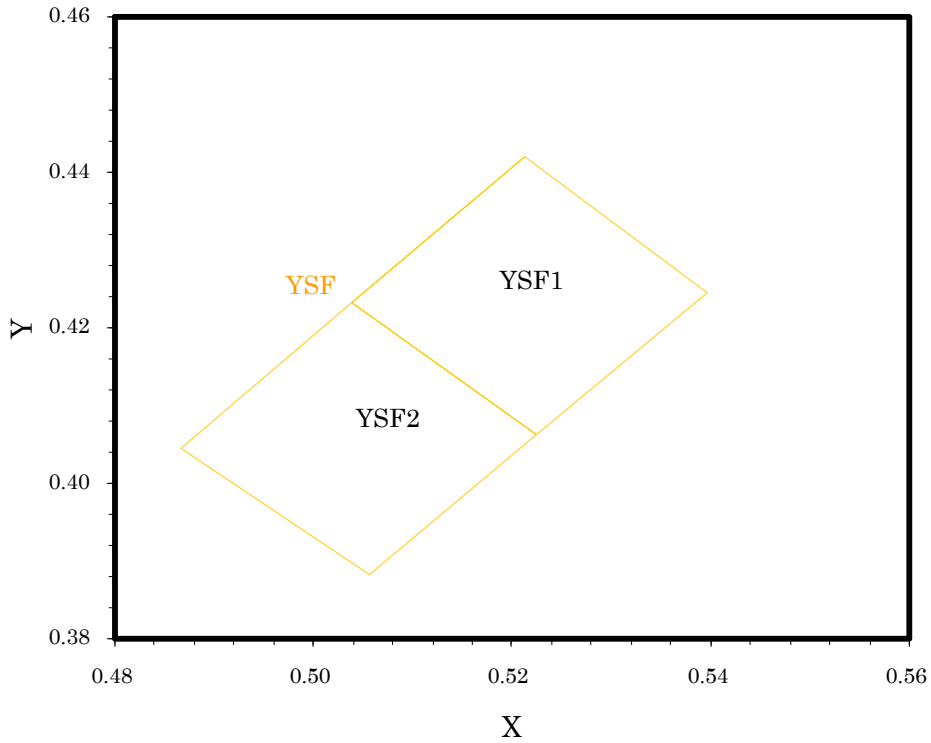

Bin code	x	y	Bin code	x	y
YSF1	0.5212	0.4220	YSF2	0.5038	0.4232
	0.5038	0.4232		0.4866	0.4045
	0.5225	0.4063		0.5055	0.3882
	0.5396	0.4246		0.5225	0.4063
	0.5212	0.4220		0.5038	0.4232

Notes:  
 Shipment may contain more than one chromaticity regions.  
 Orders for single chromaticity region are generally not accepted.  
 Measurement tolerance of the chromaticity coordinates is ±0.02.

**PACKING & LABEL SPECIFICATIONS**

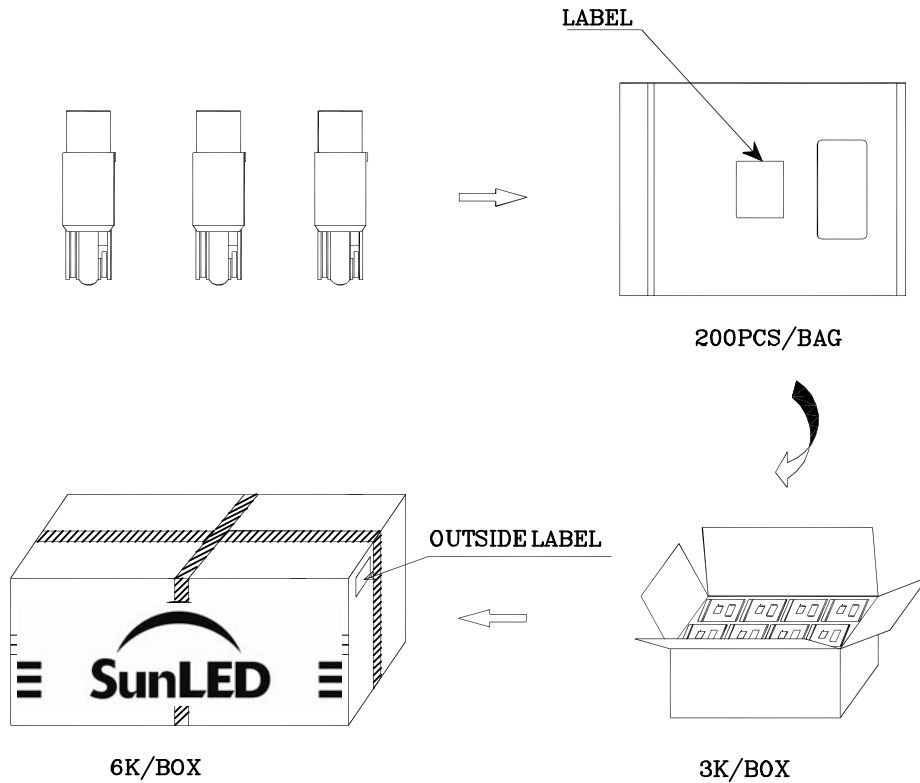

<b>SunLED</b>		
P/NO : XNZSxxx52xx02		
QTY : 200 pcs	CODE: XXX	
S/N : XX		
LOT NO:		
 XXXXXXXXXXXXXXXXXXXXXXXXXXXX		
RoHS Compliant		

**TERMS OF USE**

1. Data presented in this document reflect statistical figures and should be treated as technical reference only.
2. Contents within this document are subject to improvement and enhancement changes without notice.
3. The product(s) in this document are designed to be operated within the electrical and environmental specifications indicated on the datasheet.  
User accepts full risk and responsibility when operating the product(s) beyond their intended specifications.
4. The product(s) described in this document are intended for electronic applications in which a person's life is not reliant upon the LED. Please consult with a SunLED representative for special applications where the LED may have a direct impact on a person's life.
5. The contents within this document may not be altered without prior consent by SunLED.
6. Additional technical notes are available at <http://www.SunLEDusa.com/TechnicalNotes.asp>