

Excellent Integrated System Limited

Stocking Distributor


Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Weidmüller](#)
[1691580000](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

Product catalogue | PCB connection systems | PCB plug-in connectors | Pitch 3.50 mm (0.138 inch) | Socket connectors, tension clamp connection, pitch 3.5 | BLZF 3.5 | BLZF 3.5/180LH

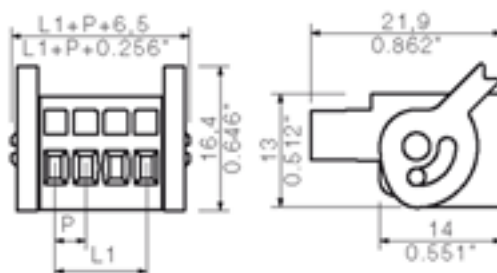

General ordering data

Order No.	1691580000
Part designation	BLZF 3.5/3/LH SN OR
Version	PCB plug-in connector, Female connectors, Tension clamp connection, Clamping range, max.: 1.5 mm ² , Pitch: 3.50 mm, No. of poles: 3, 180°, Box
EAN	4008190373542
Qty.	100 pc(s).

System parameters

Conductor connection system	Tension clamp connection
Outgoing direction of conductor	180°
Pitch	3.5 mm
Pitch in inch	0.138 inch
No. of poles	3
No. of rows	1
Screwdriver blade	0.4 x 2.5
Screwdriver blade standard	DIN 5264-A
Stripping length	10 mm
L1 in mm	7 mm
L1 in inch	0.276 inch
Electric shock protection to DIN VDE 0470	IP 20
Electric shock protection to DIN VDE 0470	Safe from finger touch

Product catalogue | PCB connection systems | PCB plug-in connectors | Pitch 3.50 mm (0.138 inch) | Socket connectors, tension clamp connection, pitch 3.5 | BLZF 3.5 | BLZF 3.5/180LH

System parameters

Material data

Insulating material	PBT
Colour	orange
colour chart	Similar to RAL 2000
Insulating material group	IIIa
Flammability class UL 94	V-0
CTI	≥ 200
Contact base material	Copper alloy
Contact surface	tinned

Connectable conductors

Clamping range, min.	0.13 mm ²
Clamping range, max.	1.5 mm ²
AWG, min.	28
AWG, max.	16
Outer diameter of insulation, max.	2.9 mm
Solid, min. H05(07) V-U	0.2 mm ²
Solid, max. H05(07) V-U	1.5 mm ²
Flexible, min. H05(07) V-K	0.2 mm ²
Flexible, max. H05(07) V-K	1.5 mm ²
With wire end ferrule, acc. to DIN 46 228/1, min.	0.2 mm ²
With wire end ferrule, acc. to DIN 46 228/1, max.	1.5 mm ²
w. plastic collar ferrule, DIN 46228 pt 4, min.	0.2 mm ²
w. plastic collar ferrule, DIN 46228 pt 4, max.	1 mm ²
Gauge to EN 60999 a x b; $\varnothing$	2.4 mm x 1.5 mm;

DIN IEC rating data

Rated current, min. No. pins (Tu=20°C)	14.5 A
Rated current, max. No. pins (Tu=20°C)	10 A
Rated current, min. No. pins (Tu=40°C)	12 A
Rated current, max. No. pins (Tu=40°C)	8 A
Rated voltage for overvoltage class/pollution severity II/2	320 V
Rated voltage for overvoltage class/pollution severity III/2	160 V
Rated voltage for overvoltage class/pollution severity III/3	160 V
Rated impulse withstand voltage for overvoltage class/pollution severity II/2	2.5 kV
Rated impulse withstand voltage for overvoltage class/pollution severity III/2	2.5 kV
Rated impulse withstand voltage for overvoltage class/pollution severity III/3	2.5 kV
Short-time withstand current resistance	3 x 1s with 100 A

CSA rating data

Rated voltage (Use group D)	300 V
Rated current (Use group D)	10 A
AWG conductor (field wiring), min.	26
AWG conductor (field wiring), max.	14

Product catalogue | PCB connection systems | PCB plug-in connectors | Pitch 3.50 mm (0.138 inch) | Socket connectors, tension clamp connection, pitch 3.5 | BLZF 3.5 | BLZF 3.5/180LH

CSA rating data

UL 1059 rating data

Rated voltage (Use group D)	300 V
Rated current (Use group D)	10 A
AWG conductor, min.	26
AWG conductor, max.	14

Approvals

Approvals institutes



Classifications

ETIM 2.0	NK
ETIM 3.0	EC001284
eClass 4.1	27-26-07-01
eClass 5.0	27-26-07-01
eClass 5.1	27-26-07-04

Similar products

Order No.	Part designation	Version
1691570000	BLZF 3.5/2/LH SN OR	PCB plug-in connector, Female connectors, Tension clamp connection, Clamping range, max.: 1.5 mm ² , Pitch: 3.50 mm, No. of poles: 2, 180°, Box
1691800000	BLZF 3.5/2/LH SN SW	PCB plug-in connector, Female connectors, Tension clamp connection, Clamping range, max.: 1.5 mm ² , Pitch: 3.50 mm, No. of poles: 2, 180°, Box
1691810000	BLZF 3.5/3/LH SN SW	PCB plug-in connector, Female connectors, Tension clamp connection, Clamping range, max.: 1.5 mm ² , Pitch: 3.50 mm, No. of poles: 3, 180°, Box
1691590000	BLZF 3.5/4/LH SN OR	PCB plug-in connector, Female connectors, Tension clamp connection, Clamping range, max.: 1.5 mm ² , Pitch: 3.50 mm, No. of poles: 4, 180°, Box
1691820000	BLZF 3.5/4/LH SN SW	PCB plug-in connector, Female connectors, Tension clamp connection, Clamping range, max.: 1.5 mm ² , Pitch: 3.50 mm, No. of poles: 4, 180°, Box
1691600000	BLZF 3.5/5/LH SN OR	PCB plug-in connector, Female connectors, Tension clamp connection, Clamping range, max.: 1.5 mm ² , Pitch: 3.50 mm, No. of poles: 5, 180°, Box
1691830000	BLZF 3.5/5/LH SN SW	PCB plug-in connector, Female connectors, Tension clamp connection, Clamping range, max.: 1.5 mm ² , Pitch: 3.50 mm, No. of poles: 5, 180°, Box
1691610000	BLZF 3.5/6/LH SN OR	PCB plug-in connector, Female connectors, Tension clamp connection, Clamping range, max.: 1.5 mm ² , Pitch: 3.50 mm, No. of poles: 6, 180°, Box

Product catalogue | PCB connection systems | PCB plug-in connectors | Pitch 3.50 mm (0.138 inch) | Socket connectors, tension clamp connection, pitch 3.5 | BLZF 3.5 | BLZF 3.5/180LH

1691840000	BLZF 3.5/6/LH SN SW	PCB plug-in connector, Female connectors, Tension clamp connection, Clamping range, max.: 1.5 mm ² , Pitch: 3.50 mm, No. of poles: 6, 180°, Box
1691620000	BLZF 3.5/7/LH SN OR	PCB plug-in connector, Female connectors, Tension clamp connection, Clamping range, max.: 1.5 mm ² , Pitch: 3.50 mm, No. of poles: 7, 180°, Box
1691850000	BLZF 3.5/7/LH SN SW	PCB plug-in connector, Female connectors, Tension clamp connection, Clamping range, max.: 1.5 mm ² , Pitch: 3.50 mm, No. of poles: 7, 180°, Box
1691630000	BLZF 3.5/8/LH SN OR	PCB plug-in connector, Female connectors, Tension clamp connection, Clamping range, max.: 1.5 mm ² , Pitch: 3.50 mm, No. of poles: 8, 180°, Box
1691860000	BLZF 3.5/8/LH SN SW	PCB plug-in connector, Female connectors, Tension clamp connection, Clamping range, max.: 1.5 mm ² , Pitch: 3.50 mm, No. of poles: 8, 180°, Box
1691640000	BLZF 3.5/9/LH SN OR	PCB plug-in connector, Female connectors, Tension clamp connection, Clamping range, max.: 1.5 mm ² , Pitch: 3.50 mm, No. of poles: 9, 180°, Box
1691870000	BLZF 3.5/9/LH SN SW	PCB plug-in connector, Female connectors, Tension clamp connection, Clamping range, max.: 1.5 mm ² , Pitch: 3.50 mm, No. of poles: 9, 180°, Box
1691650000	BLZF 3.5/10/LH SN OR	PCB plug-in connector, Female connectors, Tension clamp connection, Clamping range, max.: 1.5 mm ² , Pitch: 3.50 mm, No. of poles: 10, 180°, Box
1691880000	BLZF 3.5/10/LH SN SW	PCB plug-in connector, Female connectors, Tension clamp connection, Clamping range, max.: 1.5 mm ² , Pitch: 3.50 mm, No. of poles: 10, 180°, Box
1691660000	BLZF 3.5/11/LH SN OR	PCB plug-in connector, Female connectors, Tension clamp connection, Clamping range, max.: 1.5 mm ² , Pitch: 3.50 mm, No. of poles: 11, 180°, Box
1691890000	BLZF 3.5/11/LH SN SW	PCB plug-in connector, Female connectors, Tension clamp connection, Clamping range, max.: 1.5 mm ² , Pitch: 3.50 mm, No. of poles: 11, 180°, Box
1691670000	BLZF 3.5/12/LH SN OR	PCB plug-in connector, Female connectors, Tension clamp connection, Clamping range, max.: 1.5 mm ² , Pitch: 3.50 mm, No. of poles: 12, 180°, Box
1691900000	BLZF 3.5/12/LH SN SW	PCB plug-in connector, Female connectors, Tension clamp connection, Clamping range, max.: 1.5 mm ² , Pitch: 3.50 mm, No. of poles: 12, 180°, Box
1691680000	BLZF 3.5/13/LH SN OR	PCB plug-in connector, Female connectors, Tension clamp connection, Clamping range, max.: 1.5 mm ² , Pitch: 3.50 mm, No. of poles: 13, 180°, Box
1691910000	BLZF 3.5/13/LH SN SW	PCB plug-in connector, Female connectors, Tension clamp connection, Clamping range, max.: 1.5 mm ² , Pitch: 3.50 mm, No. of poles: 13, 180°, Box
1691690000	BLZF 3.5/14/LH SN OR	PCB plug-in connector, Female connectors, Tension clamp connection, Clamping range, max.: 1.5 mm ² , Pitch: 3.50 mm, No. of poles: 14, 180°, Box
1691920000	BLZF 3.5/14/LH SN SW	PCB plug-in connector, Female connectors, Tension clamp connection, Clamping range, max.: 1.5 mm ² , Pitch: 3.50 mm, No. of poles: 14, 180°, Box

Product catalogue | PCB connection systems | PCB plug-in connectors | Pitch 3.50 mm (0.138 inch) | Socket connectors, tension clamp connection, pitch 3.5 | BLZF 3.5 | BLZF 3.5/180LH

1691700000	BLZF 3.5/15/LH SN OR	PCB plug-in connector, Female connectors, Tension clamp connection, Clamping range, max.: 1.5 mm ² , Pitch: 3.50 mm, No. of poles: 15, 180°, Box
1691930000	BLZF 3.5/15/LH SN SW	PCB plug-in connector, Female connectors, Tension clamp connection, Clamping range, max.: 1.5 mm ² , Pitch: 3.50 mm, No. of poles: 15, 180°, Box
1691710000	BLZF 3.5/16/LH SN OR	PCB plug-in connector, Female connectors, Tension clamp connection, Clamping range, max.: 1.5 mm ² , Pitch: 3.50 mm, No. of poles: 16, 180°, Box
1691940000	BLZF 3.5/16/LH SN SW	PCB plug-in connector, Female connectors, Tension clamp connection, Clamping range, max.: 1.5 mm ² , Pitch: 3.50 mm, No. of poles: 16, 180°, Box
1691720000	BLZF 3.5/17/LH SN OR	PCB plug-in connector, Female connectors, Tension clamp connection, Clamping range, max.: 1.5 mm ² , Pitch: 3.50 mm, No. of poles: 17, 180°, Box
1691950000	BLZF 3.5/17/LH SN SW	PCB plug-in connector, Female connectors, Tension clamp connection, Clamping range, max.: 1.5 mm ² , Pitch: 3.50 mm, No. of poles: 17, 180°, Box
1691730000	BLZF 3.5/18/LH SN OR	PCB plug-in connector, Female connectors, Tension clamp connection, Clamping range, max.: 1.5 mm ² , Pitch: 3.50 mm, No. of poles: 18, 180°, Box
1691960000	BLZF 3.5/18/LH SN SW	PCB plug-in connector, Female connectors, Tension clamp connection, Clamping range, max.: 1.5 mm ² , Pitch: 3.50 mm, No. of poles: 18, 180°, Box
1691740000	BLZF 3.5/19/LH SN OR	PCB plug-in connector, Female connectors, Tension clamp connection, Clamping range, max.: 1.5 mm ² , Pitch: 3.50 mm, No. of poles: 19, 180°, Box
1691970000	BLZF 3.5/19/LH SN SW	PCB plug-in connector, Female connectors, Tension clamp connection, Clamping range, max.: 1.5 mm ² , Pitch: 3.50 mm, No. of poles: 19, 180°, Box
1691750000	BLZF 3.5/20/LH SN OR	PCB plug-in connector, Female connectors, Tension clamp connection, Clamping range, max.: 1.5 mm ² , Pitch: 3.50 mm, No. of poles: 20, 180°, Box
1691980000	BLZF 3.5/20/LH SN SW	PCB plug-in connector, Female connectors, Tension clamp connection, Clamping range, max.: 1.5 mm ² , Pitch: 3.50 mm, No. of poles: 20, 180°, Box
1691760000	BLZF 3.5/21/LH SN OR	PCB plug-in connector, Female connectors, Tension clamp connection, Clamping range, max.: 1.5 mm ² , Pitch: 3.50 mm, No. of poles: 21, 180°, Box
1691990000	BLZF 3.5/21/LH SN SW	PCB plug-in connector, Female connectors, Tension clamp connection, Clamping range, max.: 1.5 mm ² , Pitch: 3.50 mm, No. of poles: 21, 180°, Box
1691770000	BLZF 3.5/22/LH SN OR	PCB plug-in connector, Female connectors, Tension clamp connection, Clamping range, max.: 1.5 mm ² , Pitch: 3.50 mm, No. of poles: 22, 180°, Box
1692000000	BLZF 3.5/22/LH SN SW	PCB plug-in connector, Female connectors, Tension clamp connection, Clamping range, max.: 1.5 mm ² , Pitch: 3.50 mm, No. of poles: 22, 180°, Box
1691780000	BLZF 3.5/23/LH SN OR	PCB plug-in connector, Female connectors, Tension clamp connection, Clamping range, max.: 1.5 mm ² , Pitch: 3.50 mm, No. of poles: 23, 180°, Box

 Product catalogue | PCB connection systems | PCB plug-in connectors | Pitch 3.50 mm (0.138 inch) | Socket connectors, tension clamp connection, pitch 3.5 | BLZF 3.5 | BLZF 3.5/180LH

1692010000	BLZF 3.5/23/LH SN SW	PCB plug-in connector, Female connectors, Tension clamp connection, Clamping range, max.: 1.5 mm ² , Pitch: 3.50 mm, No. of poles: 23, 180°, Box
1691790000	BLZF 3.5/24/LH SN OR	PCB plug-in connector, Female connectors, Tension clamp connection, Clamping range, max.: 1.5 mm ² , Pitch: 3.50 mm, No. of poles: 24, 180°, Box
1692020000	BLZF 3.5/24/LH SN SW	PCB plug-in connector, Female connectors, Tension clamp connection, Clamping range, max.: 1.5 mm ² , Pitch: 3.50 mm, No. of poles: 24, 180°, Box