

Excellent Integrated System Limited

Stocking Distributor


Click to view price, real time Inventory, Delivery & Lifecycle Information:

[FCI](#)
[H402505C00J0G](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

PRODUCT NUMBER	PITCH
H4xx50xC00J0G	5.08 mm



Dimension


DIM A	Nx5.08+0.62
DIM B	(N-1)x5.08
DIM C	(N-1)x5.08+10.16
DIM D	(N-1)x5.08+15.86

N=Number of poles



POLES	Tolerance
2p-6p	±0.15
7p-12p	±0.25
13p-16p	±0.35
17p-24p	±0.40

PART NO.: H4 xx 5 0 x C 00J0 G

Solid block	No. of poles	Color	RoHS compliant (lead<4%) In copper Alloy
02	2 poles	0 Black (RAL9005)	
03	3 poles	2 Red (RAL3001/D)	
...	...	3 Orange(RAL2011/P)	
24	24 poles	4 Yellow(RAL1018/A)	
		5 Green(RAL6018/T)	
		6 Blue (RAL5015/A)	
		8 Grey(RAL7035/D)	
		9 White(RAL1102)	
		C Green(RAL6018/U)	



2P

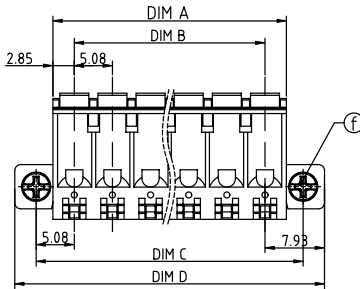

SECTION P-P

Material:

- Item@Top body:Thermoplastic (UL94V-0)
- Item@Bottom body:Thermoplastic (UL94V-0)
- Item@Terminal lever:Thermoplastic (UL94V-0) Orange (RAL2001/P)
- Item@Spring Clamp:Stainless Steel
- Item@Female contact:PhBz (CuSn) Tin plated
- Item@Flange screw:Steel Zinc plating M2.5"/-"/"combination type

Electrical cULus

- Voltage rating:300V
- Current rating:10A
- Solid wire(AWG):12-26
- Stranded wire(AWG):12-26
- Wire strip length:9-10mm
- Withstanding Voltage:1.6KV
- Operating temperature:-40°C to +115°C
- Safety Approval: cULus

mat'l. code	surface	tolerance	projection	product family
ltr ecn no dr date	ASME Y14.5	ASME Y14.5	MM	TERMINAL BLOCK
	tolerances unless otherwise specified			
	angles	X.±0.5		
		X.X±0.3		
	X'±1°	X.XX±0.1		
dr EVIN ZHONG 051614				
enr EVIN ZHONG 051614				
chr HANKE FENG 051614				
appd SHI JUN 051614				
sheet index	revision	A		
sheet 1				