

## Excellent Integrated System Limited

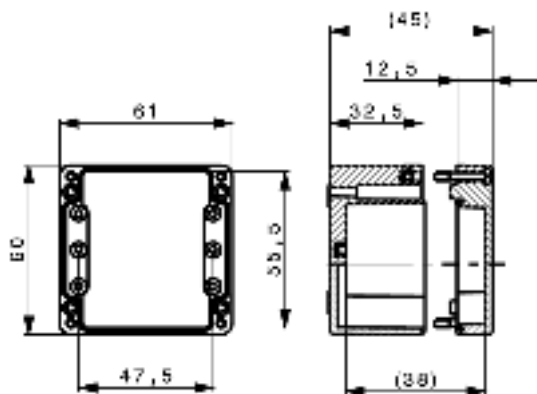
Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Weidmüller](#)  
[9510230000](#)

For any questions, you can email us directly:

[sales@integrated-circuit.com](mailto:sales@integrated-circuit.com)


**General ordering data**

Order No.	9510230000
Part designation	Klippon POK 4 Ex
Version	EXI enclosure, 91 mm, 120 mm, 122 mm, glass fibre-reinforced polyester
EAN	4008190498573
Qty.	1 pc(s).

**Dimensions**

Fixing dimension, height	82 mm
Fixing dimension, width	106 mm
Height	91 mm
Length	120 mm
Width	122 mm

**General details**

Cover fixing	4 stainless steel M6 screws
Enclosure fixing	Holes 6 mm
Sealing material	Polyurethane and chloroprene
Colour	grey
Class of protection to EN 60529	IP 66
Weight	750 g
Ambient temperature, min.	-40 °C
Ambient temperature, max.	90 °C

**Screwed cable glands top/bottom**

M 12	12
M 16	6
M 20	4
M 25	5
M 32	4
Side of enclosure	Top / Bottom

**Screwed cable glands, left/right**

M12	8
-----	---

**Screwed cable glands, left/right**

M16	4
M20	3
M25	1
M32	1
On housing side	left / right

**Approvals**

Approvals institutes

GOSTEX ATEX ATEX



**Classifications**

ETIM 2.0	EC000520
ETIM 3.0	EC000049
eClass 4.1	27-14-12-06
eClass 5.0	27-18-05-02
eClass 5.1	27-18-05-02

**Similar products**

Order No.	Part designation	Version
1277500000	Klippon POK 4	Housings, 91 mm, 120 mm, 122 mm, glass fibre-reinforced polyester