

## Excellent Integrated System Limited


Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Weidmüller](#)  
[1769330000](#)

For any questions, you can email us directly:

[sales@integrated-circuit.com](mailto:sales@integrated-circuit.com)

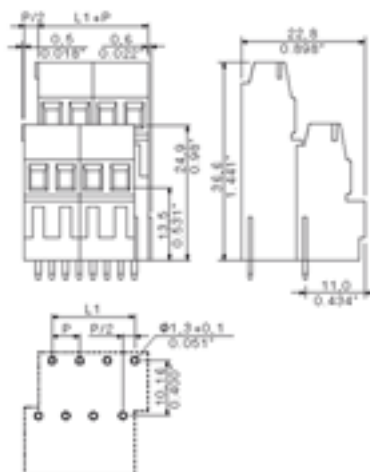

**General ordering data**

Order No.	1769330000
Part designation	LM2H5.08/22 3.5 OR
Version	PCB terminal, Clamping yoke connection, Soldered connection, Clamping range, max.: 2.5 mm <sup>2</sup> , Pitch: 5.08 mm, No. of poles: 22, 90°, Box
EAN	4032248116386
Qty.	20 pc(s).

**System parameters**

Product family	System LM
Conductor connection system	Clamping yoke connection
Fitted to PCB	Soldered connection
Outgoing direction of conductor	90°
Pitch	5.08 mm
Pitch in inch	0.2 inch
No. of poles	22
Fitted by customer	yes
Max. adjacent poles per row	48
No. of rows	2
Solder pin length	3.5 mm
Dia. of fitting hole	1.3 mm
Fitting hole tolerance	+ 0.1 mm
No. of solder pins per pole	1

System parameters	
Screwdriver blade	0.6 x 3.5
Screwdriver blade standard	DIN 5264
Tightening torque, min.	0.4 Nm
Tightening torque, max.	0.5 Nm
Clamping screw	M 2.5
Stripping length	6 mm
L1 in mm	50.8 mm
L1 in inch	2 inch
Electric shock protection to DIN VDE 0470	IP 20
Electric shock protection to DIN VDE 0470	Safe from finger touch
Material data	
Insulating material	Wemid (PA)
Colour	orange
colour chart	Similar to RAL 2000
Insulating material group	I
Flammability class UL 94	V-0
CTI	>= 600
Temperature of glow-wire test	750 °C
Duration of glow-wire test	30 S
Contact base material	Copper alloy
Contact surface	tinned
Storage temperature, min.	-25 °C
Storage temperature, max.	55 °C
Connectable conductors	
Clamping range, min.	0.2 mm <sup>2</sup>
Clamping range, max.	2.5 mm <sup>2</sup>
AWG, min.	24
AWG, max.	14
O.D. of conductor insulation, max.	2.9 mm
Solid, min. H05(07) V-U	0.2 mm <sup>2</sup>
Solid, max. H05(07) V-U	2.5 mm <sup>2</sup>
Flexible, min. H05(07) V-K	0.2 mm <sup>2</sup>
Flexible, max. H05(07) V-K	1.5 mm <sup>2</sup>
With wire end ferrule, acc. to DIN 46 228/1, min.	0.25 mm <sup>2</sup>
With wire end ferrule, acc. to DIN 46 228/1, max.	1.5 mm <sup>2</sup>
w. plastic collar ferrule, DIN 46228 pt 4, min.	0.25 mm <sup>2</sup>
w. plastic collar ferrule, DIN 46228 pt 4, max.	1.5 mm <sup>2</sup>
Gauge to EN 60999 a x b; ø	2.4 mm x 1.5 mm; 1.9mm
DIN IEC rating data	
Rated current, min. No. pins (Tu=20°C)	17.5 A
Rated current, max. No. pins (Tu=20°C)	16 A
Rated current, min. No. pins (Tu=40°C)	17.5 A
Rated current, max. No. pins (Tu=40°C)	14.2 A
Rated voltage for overvoltage class/pollution severity II/2	630 V
Rated voltage for overvoltage class/pollution severity III/2	320 V

DIN IEC rating data	
Rated voltage for overvoltage class/pollution severity III/3	250 V
Rated impulse withstand voltage for overvoltage class/pollution severity II/2	4 kV
Rated impulse withstand voltage for overvoltage class/pollution severity III/2	4 kV
Rated impulse withstand voltage for overvoltage class/pollution severity III/3	4 kV
Short-time withstand current resistance	3 x 1s with 120 A

CSA rating data	
Rated voltage (Use group D)	300 V
Rated current (Use group D)	10 A
AWG conductor (field wiring), min.	24
AWG conductor (field wiring), max.	14

UL 1059 rating data	
Rated voltage (Use group D)	300 V
Rated current (Use group D)	10 A
AWG conductor, min.	24
AWG conductor, max.	14

**Approvals**  
 Approvals institutes



Downloads	
CAD Library (P-CAD Format - Standard)	LM2H.lib

Classifications	
ETIM 2.0	NK
ETIM 3.0	EC001284
eClass 4.1	NK
eClass 5.0	NK
eClass 5.1	NK

**Similar products**

Order No.	Part designation	Version
1769240000	LM2H5.08/4 3.5 OR	PCB terminal, Clamping yoke connection, Soldered connection, Clamping range, max.: 2.5 mm <sup>2</sup> , Pitch: 5.08 mm, No. of poles: 4, 90°, Box
1769250000	LM2H5.08/6 3.5 OR	PCB terminal, Clamping yoke connection, Soldered connection, Clamping range, max.: 2.5 mm <sup>2</sup> , Pitch: 5.08 mm, No. of poles: 6, 90°, Box

1769260000	LM2H5.08/8 3.5 OR	PCB terminal, Clamping yoke connection, Soldered connection, Clamping range, max.: 2.5 mm <sup>2</sup> , Pitch: 5.08 mm, No. of poles: 8, 90°, Box
1769270000	LM2H5.08/10 3.5 OR	PCB terminal, Clamping yoke connection, Soldered connection, Clamping range, max.: 2.5 mm <sup>2</sup> , Pitch: 5.08 mm, No. of poles: 10, 90°, Box
1769280000	LM2H5.08/12 3.5 OR	PCB terminal, Clamping yoke connection, Soldered connection, Clamping range, max.: 2.5 mm <sup>2</sup> , Pitch: 5.08 mm, No. of poles: 12, 90°, Box
1769290000	LM2H5.08/14 3.5 OR	PCB terminal, Clamping yoke connection, Soldered connection, Clamping range, max.: 2.5 mm <sup>2</sup> , Pitch: 5.08 mm, No. of poles: 14, 90°, Box
1769300000	LM2H5.08/16 3.5 OR	PCB terminal, Clamping yoke connection, Soldered connection, Clamping range, max.: 2.5 mm <sup>2</sup> , Pitch: 5.08 mm, No. of poles: 16, 90°, Box
1769310000	LM2H5.08/18 3.5 OR	PCB terminal, Clamping yoke connection, Soldered connection, Clamping range, max.: 2.5 mm <sup>2</sup> , Pitch: 5.08 mm, No. of poles: 18, 90°, Box
1769320000	LM2H5.08/20 3.5 OR	PCB terminal, Clamping yoke connection, Soldered connection, Clamping range, max.: 2.5 mm <sup>2</sup> , Pitch: 5.08 mm, No. of poles: 20, 90°, Box
1769340000	LM2H5.08/24 3.5 OR	PCB terminal, Clamping yoke connection, Soldered connection, Clamping range, max.: 2.5 mm <sup>2</sup> , Pitch: 5.08 mm, No. of poles: 24, 90°, Box
1769350000	LM2H5.08/26 3.5 OR	PCB terminal, Clamping yoke connection, Soldered connection, Clamping range, max.: 2.5 mm <sup>2</sup> , Pitch: 5.08 mm, No. of poles: 26, 90°, Box
1769360000	LM2H5.08/28 3.5 OR	PCB terminal, Clamping yoke connection, Soldered connection, Clamping range, max.: 2.5 mm <sup>2</sup> , Pitch: 5.08 mm, No. of poles: 28, 90°, Box
1769370000	LM2H5.08/30 3.5 OR	PCB terminal, Clamping yoke connection, Soldered connection, Clamping range, max.: 2.5 mm <sup>2</sup> , Pitch: 5.08 mm, No. of poles: 30, 90°, Box
1769380000	LM2H5.08/32 3.5 OR	PCB terminal, Clamping yoke connection, Soldered connection, Clamping range, max.: 2.5 mm <sup>2</sup> , Pitch: 5.08 mm, No. of poles: 32, 90°, Box
1769390000	LM2H5.08/34 3.5 OR	PCB terminal, Clamping yoke connection, Soldered connection, Clamping range, max.: 2.5 mm <sup>2</sup> , Pitch: 5.08 mm, No. of poles: 34, 90°, Box
1769400000	LM2H5.08/36 3.5 OR	PCB terminal, Clamping yoke connection, Soldered connection, Clamping range, max.: 2.5 mm <sup>2</sup> , Pitch: 5.08 mm, No. of poles: 36, 90°, Box
1769410000	LM2H5.08/38 3.5 OR	PCB terminal, Clamping yoke connection, Soldered connection, Clamping range, max.: 2.5 mm <sup>2</sup> , Pitch: 5.08 mm, No. of poles: 38, 90°, Box
1769420000	LM2H5.08/40 3.5 OR	PCB terminal, Clamping yoke connection, Soldered connection, Clamping range, max.: 2.5 mm <sup>2</sup> , Pitch: 5.08 mm, No. of poles: 40, 90°, Box
1769430000	LM2H5.08/42 3.5 OR	PCB terminal, Clamping yoke connection, Soldered connection, Clamping range, max.: 2.5 mm <sup>2</sup> , Pitch: 5.08 mm, No. of poles: 42, 90°, Box

1769440000	LM2H5.08/44 3.5 OR	PCB terminal, Clamping yoke connection, Soldered connection, Clamping range, max.: 2.5 mm <sup>2</sup> , Pitch: 5.08 mm, No. of poles: 44, 90°, Box
1769450000	LM2H5.08/46 3.5 OR	PCB terminal, Clamping yoke connection, Soldered connection, Clamping range, max.: 2.5 mm <sup>2</sup> , Pitch: 5.08 mm, No. of poles: 46, 90°, Box
1769460000	LM2H5.08/48 3.5 OR	PCB terminal, Clamping yoke connection, Soldered connection, Clamping range, max.: 2.5 mm <sup>2</sup> , Pitch: 5.08 mm, No. of poles: 48, 90°, Box