

Excellent Integrated System Limited

Stocking Distributor




Click to view price, real time Inventory, Delivery & Lifecycle Information:

[FCI](#)
[HR06508100J0G](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

PRODUCT NUMBER	PITCH
HRxx50x100J0G	7.62mm

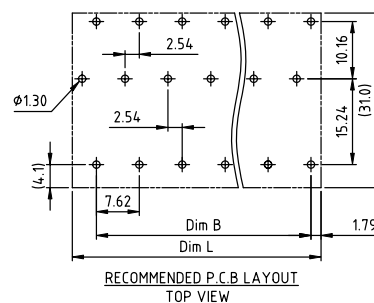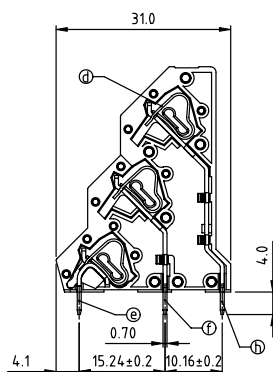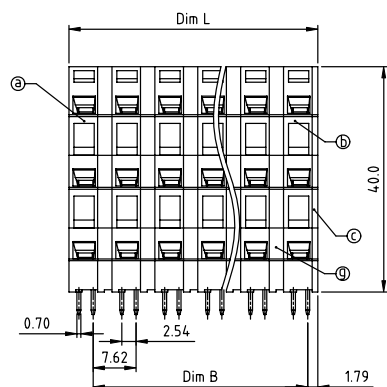

Material:

- Item③Terminal side housing:Thermoplastic (UL94V-0)
- Item④Terminal housing:Thermoplastic (UL94V-0)
- Item⑤Terminal cover:Thermoplastic (UL94V-0)
- Item⑥Spring clamp: Stainless steel
- Item⑦Short pin: Brass, Tin plated
- Item⑧Middle pin:Brass, Tin plated
- Item⑨Long pin:Brass, Tin plated

Electrical:

- | | |
|--------------------------|-----------------|
| Electrical: | cULus |
| ● Voltage rating: | 300V |
| ● Current rating: | 10A |
| ● Wire range: | |
| ● Solid wire(AWG): | 12-28 |
| ● Stranded wire(AWG): | 12-28 |
| ● Wire strip length: | 5-6mm |
| ● Withstanding Voltage: | 1.6KV |
| ● Operating temperature: | -40°C to +115°C |
| ● Soldering temperature: | 260°C±5°C/5 Sec |
| ● Safety Approval: | CULUS |

N=Number of poles
Dim L=(N/3-1)×7.62+6.08
Dim B=(N/3-1)×7.62

PART NO.: HR xx 50 x 100J0 G

Poles	Dim L	Dim B
3×2p-3×4p	±0.10	±0.10
3×5p-3×8p	±0.15	±0.15
3×9p-3×12p	±0.20	±0.20
3×13p-3×16p	±0.30	±0.30

No. of poles	Color	RHSS compliant (lead<4%)
End Stackable	0 Black (RAL9005)	In copper Alloy
06 3x2 poles	2 Red (RAL3001/D)	
09 3x3 poles	3 Orange(RAL2011/P)	
...	4 Yellow(RAL1018/A)	
...	5 Green(RAL6018/T)	
48 3x16 poles	6 Blue (RAL5015/A)	
	8 Grey(RAL7004/P)	
	9 White(RAL1102)	
	C Multiple colors	

mat'l. code				surface ASME Y14.5 ✓ tolerance ASME Y14.5		projection 		product family TERMINAL BLOCK					
ltr	ecn	no	dr	date				title					
								TERMINAL BLOCK					
								SPRING CLAMP 4SD WIRE INLET, 3-LEVEL,					
						scale		INTERLACE TYPE					
								dwg no sheet 1 of 1 size					
								Hrxx50x100J0G A ₄					
								type CUSTOMER Drawing					
sheet index				revision sheet		A 1							