

Excellent Integrated System Limited

Stocking Distributor


Click to view price, real time Inventory, Delivery & Lifecycle Information:

[FCI](#)
[HW02A05200J0G](#)

For any questions, you can email us directly:


sales@integrated-circuit.com

PRODUCT NUMBER	PITCH
HWxxA0x200J0G	7.50 mm


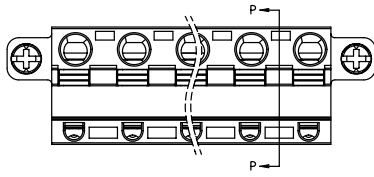


Dimension	
DIM L	(N-1)×7.50+5.7
DIM A	(N-1)×7.50+5.0
DIM B	(N-1)×7.50
DIM C	(N-1)×7.50+12.2
DIM D	(N-1)×7.50+17.1
N=Number of poles	
POLES	Tolerance
2p-6p	±0.15
7p-12p	±0.20
13p-16p	±0.30

PART NO.: HW xx A0 x 2 00J0 G		
Solid block	0	Black (RAL9005)
No. of poles	2	Red (RAL3001/D)
02 2 poles	3	Orange(RAL2011/P)
03 3 poles	4	Yellow(RAL1018/A)
...	5	Green(RAL6018/T)
16 16 poles	6	Blue (RAL5015/A)
	8	Grey(RAL7035/D)
	9	White(RAL1102)
	C	Green(RAL6018/U)




2P mark

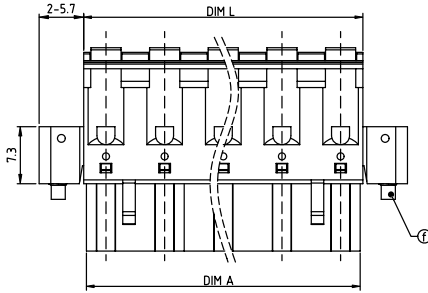

- Material:**
- Item ① Top body: Thermoplastic (UL94V-0)
 - Item ② Bottom body: Thermoplastic (UL94V-0)
 - Item ③ Terminal lever: Thermoplastic (UL94V-0) Orange(RAL2011/P)
 - Item ④ Spring clamp: Stainless Steel
 - Item ⑤ Female contact: PhBz (CuSn) Tin plated
 - Item ⑥ Flange screw: Steel Zinc plating M2.5 soft "+/-" combination type

- Electrical**
- Voltage rating: 300V
 - Current rating: 10A
 - Solid wire(AWG): 12-26
 - Stranded wire(AWG): 12-26
 - Wire strip length: 8-9mm
 - Withstanding Voltage: 1.6KV
 - Operating temperature: -40°C to +115°C
 - Safety Approval: cULus

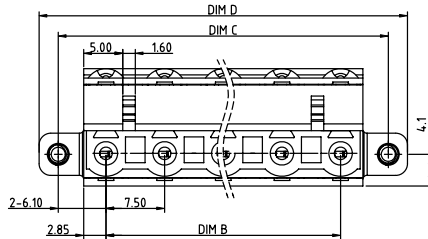

mat'l. code				surface tolerance ASME Y14.5 ✓ ASME Y14.5		projection 		product family TERMINAL BLOCK			
ltr ecn no dr date				tolerances unless otherwise specified				title			
				angles X.±0.5 X.X±0.3 X'±1" X.XX±0.1		MM 		TERMINAL BLOCK			
						scale		SPRING CLAMP, PLUGGABLE PLUG, WITH FLANGE CONTACT ON DOWN SIDE			
				dr EVIN ZHONG 051614				dwg no		sheet 1 of 1	size
				enrg EVIN ZHONG 051614				HWxxA0x200J0G		A4	
				chr HANKE FENG 051614							
				appd SHI JUN 051614							
sheet index		revision sheet A 1						type		CUSTOMER Drawing	