

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[FCI](#)
[KD02105200J0G](#)

For any questions, you can email us directly:
sales@integrated-circuit.com




PRODUCT NUMBER	PITCH
KDxx10x200JOG	3.50 mm

Dim L=(N-1)×3.5+4.2
 Dim P=(N-1)×3.5
 N=Number of poles


POLES	Tolerance
2p-6p	±0.15
7p-12p	±0.25
13p-18p	±0.30
19p-24p	±0.40

PART NO.: KD xx 1 0 x 2 00J0 G

Solid block	Housing Color	RoHS compliant
No. of poles	0 Black (RAL9005)	(lead-4%)
02 2 poles	5 Green(RAL6018/T)	In copper Alloy
03 3 poles	6 Blue (RAL5015/A)	
...	8 Grey(RAL7035/D)	
24 24 poles		

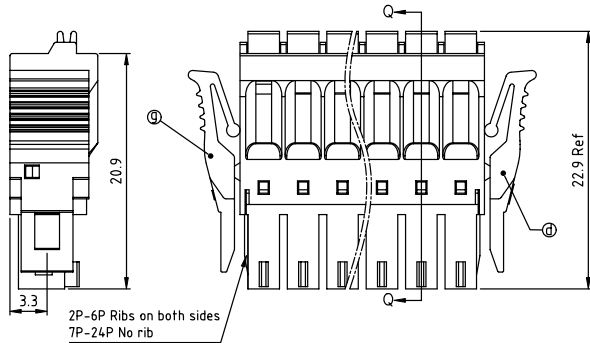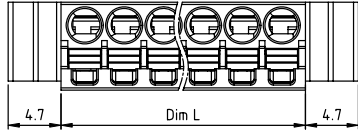

Section Q-Q

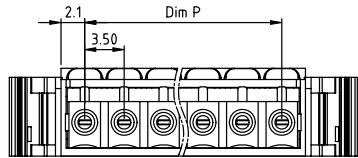

Material:

- Item① Terminal lever:Thermoplastic (UL94V-0) Orange (RAL2011/P)
- Item② Top housing:Thermoplastic (UL94V-0)
- Item③ Female Contact: PhBz, Bright Tin plated over Nickel Plated
- Item④ Terminal Right Latch: Thermoplastic (UL94V-0)
- Item⑤ Spring clamp: Stainless steel
- Item⑥ Bottom housing: Thermoplastic (UL94V-0)
- Item⑦ Terminal Left Latch: Thermoplastic (UL94V-0)

Electrical:

- Voltage rating: 160 V
- Current rating: 5.5A
- Wire range:
- Solid wire(AWG): 16-24
- Stranded wire(AWG): 16-24
- Wire strip length: 9-10 mm
- Withstanding Voltage: 1.32 KV
- Operating temperature: -40°C to +115°C
- Safety Approval:

mat'l. code	surface ASME Y14.5	tolerance ASME Y14.5	projection 	product family TERMINAL BLOCK
ltr	ecn no	dr	date	title
B	T-24174	HF	052816	TERMINAL BLOCK
tolerances unless otherwise specified				SPRING CLAMP, PLUGGABLE PLUG, WITH LATCH
angles				dwg no
X±0.5				sheet 1 of 1
X.X±0.3				size
X.XX±0.1				KDxx10x200JOG
scale				A4
dr				type
ENGR EVIN ZHONG 052014				CUSTOMER Drawing
ENGR EVIN ZHONG 052014				
CHR HANKE FENG 052014				
APPD SHI JUN 052014				
sheet index	revision sheet	B	1	