

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[FCI](#)
[KE041151A0J0G](#)




For any questions, you can email us directly:
sales@integrated-circuit.com

1 | 2


3

4

PRODUCT NUMBER	PITCH
KExx11x1A0J0G	3.50 mm

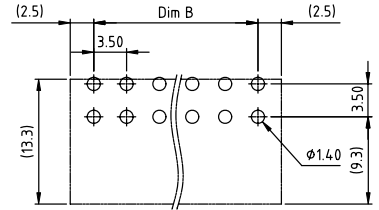

RECOMMENDED P.C.B LAYOUT
TOP VIEW



- Material:
- Item① Terminal(housing):Thermoplastic (UL94V-0)
 - Item② Short pin: copper Tin plated
 - Item③ Long pin: copper Tin plated

- Electrical: cULus
- Voltage rating: 160V
 - Current rating: 5.5A
 - Withstanding Voltage: 1.32 KV
 - Operating temperature: -40°C to +15°C
 - Soldering temperature: 260°C ±5°C/5 Sec
 - Safety Approval:

Dim A=(N/2-1)×3.5+5.0
Dim B=(N/2-1)×3.5
Dim C=(N/2-1)×3.5
N=Number of poles

POLES	Tolerance
2x2p-2x6p	±0.15
2x7p-2x12p	±0.20
2x13p-2x18p	±0.25
2x19p-2x24p	±0.30

PART NO.: KE xx 1 1 x 1 A0J0 G

Solid block	0	Color	0	Black (RAL9005)	RoHS compliant
No. of poles	2		2	Red (RAL3001/D)	(lead<4%)
04 2x2poles	3		3	Orange(RAL2011/P)	In copper Alloy
06 2x3poles	4		4	Yellow(RAL1018/A)	
...	5		5	Green(RAL6018/T)	
48 2x24poles	6		6	Blue (RAL5015/A)	
	8		8	Grey(RAL7035/D)	
	9		9	White(RAL1102)	
	C		C	Green(RAL6018/U)	

mat'l. code	surface ASME Y14.5	tolerance ASME Y14.5	projection 	product family TERMINAL BLOCK
ltr	ecn	no	dr	date
tolerances unless otherwise specified				title TERMINAL BLOCK
angles	X.±0.5		PLUGGABLE SOCKET, CLOSE RIGHT ANGLE	
mm	X.X±0.3		dwg no	
X'±1'	X.XX±0.1		sheet 1 of 1	
dr	EVIN ZHONG	042314	size A4	
enrg	EVIN ZHONG	042314	KExx11x1A0J0G	
chr	HANKE FENG	042314	type CUSTOMER Drawing	
appd	SHI JUN	042314		
sheet index	revision sheet	A 1		