

Excellent Integrated System Limited

Stocking Distributor



Click to view price, real time Inventory, Delivery & Lifecycle Information:

[FCI](#)
[KE04715300J0G](#)


For any questions, you can email us directly:

sales@integrated-circuit.com

PRODUCT NUMBER	PITCH
KExx71x300J0G	5.00 mm

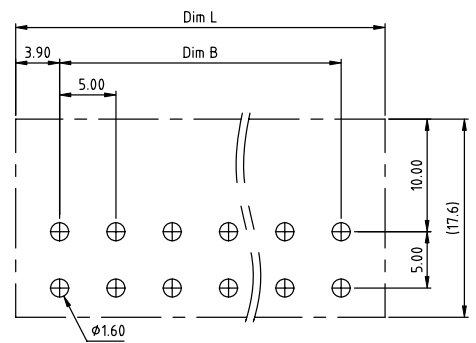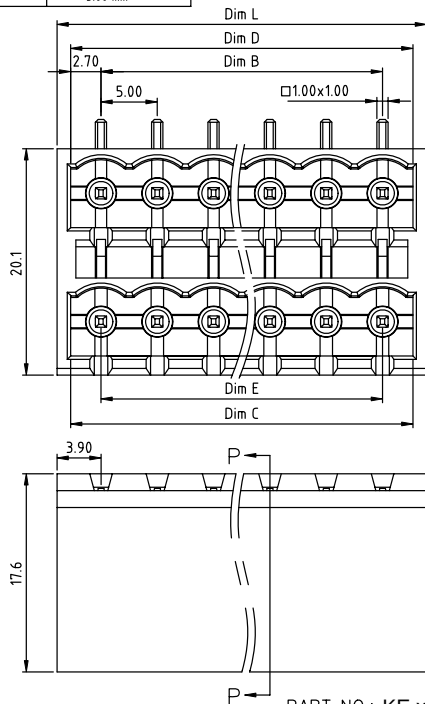

RECOMMENDED P.C.B. LAYOUT
TOP VIEW

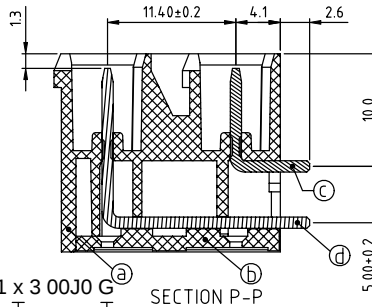

- Material:
- Item ① Terminal(housing): Thermoplastic (UL94V-0)
 - Item ② Terminal(cover): Thermoplastic (UL94V-0)
 - Item ③ Short pin: Copper Tin plated
 - Item ④ Long pin: Copper Tin plated

- Electrical:
- cULus
 - Voltage rating: 300V
 - Current rating: 12A
 - Withstanding Voltage: 1.6KV
 - Operating temperature: -40°C to +115°C
 - Soldering temperature: 260°C±5°C/5 Sec
 - Safety Approval: cULus

N=Number of poles
Dim L=N/2x5.0+2.8
Dim B=(N/2-1)x5.0
Dim C=(N/2-1)x5.0+5.4
Dim D=(N/2-1)x5.0+5.4
Dim E=(N/2-1)x5.0

Poles	Dim L	Dim B	Dim C	Dim D	Dim E
2x2P-2x6P	±0.15	±0.15	+0.05 -0.05	+0.05 -0.05	±0.15
2x7P-2x12P	±0.25	±0.25	+0.10 -0.05	+0.10 -0.05	±0.25
2x13P-2x18P	±0.35	±0.35	+0.20 -0.05	+0.20 -0.05	±0.35
2x19P-2x24P	±0.40	±0.40	+0.25 -0.10	+0.25 -0.10	±0.40

PART NO.: KE xx 7 1 x 3 00J0 G

Solid block
No. of poles
04 2x2poles
06 2x3poles
...
48 2x24poles

Color
0 Black (RAL9005)
2 Red (RAL3001/D)
3 Orange(RAL2011/P)
4 Yellow(RAL1018/A)
5 Green(RAL6018/T)
6 Blue (RAL5015/A)
8 Grey(RAL 7035/D)
9 White(RAL1102)
C Green(RAL6018/U)

RoHS compliant
(lead<4%)
In copper Alloy

mat'l. code	surface	tolerance	projection	product family
ltr ecn no dr date	ASME Y14.5	ASME Y14.5	MM	TERMINAL BLOCK
angles	tolerances unless otherwise specified	X.±0.5	MM	title
X'±1"		X.X±0.3	scale	TERMINAL BLOCK
dr EVIN ZHONG 042414		X.XX±0.1		PLUGGABLE SOCKET,CLOSE RIGHT ANGLE
enr EVIN ZHONG 042414				dwg no
chr HANKE FENG 042414				sheet 1 of 1
appd SHI JUN 042414				size
sheet index	revision sheet	A 1		A4
				type
				CUSTOMER Drawing

form: A4mmXLc

PDS: Rev :A 3

STATUS:Released

Printed: Jul 01, 2014