

Excellent Integrated System Limited

Stocking Distributor





Click to view price, real time Inventory, Delivery & Lifecycle Information:

[FCI](#)
[KH02055000J0G](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

PRODUCT NUMBER	PITCH
KHxx05x000J0G	6.35 mm

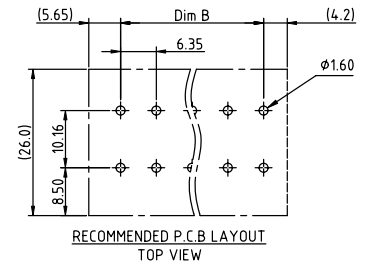

N = Number of poles
Dim L = N x 6.35 + 1.5
Dim B = (N - 1) x 6.35

poles	Dim L	Dim B
1p	±0.10	±0.10
2-6p	±0.20	±0.20
7-12p	±0.30	±0.30
13-16p	±0.40	±0.40

PART NO.: KH xx 05 x 0 00J0 G

End stackable No. of poles	Body Color	RoHS compliant (lead<4%) In copper Alloy
01 1 pole	0 Black (RAL9005)	
02 2 poles	2 Red (RAL3001/D)	
...	3 Orange (RAL2011/P)	
...	4 Yellow (RAL1018/A)	
16 16 poles	5 Green (RAL6018/T)	
	6 Blue (RAL5015/A)	
	8 Grey (RAL7035/D)	
	9 White (RAL1102)	
	C Green (RAL6018/U)	

Material

- Item ① Terminal body: Thermoplastic (UL94V-0)
 - Item ② Terminal cover: Thermoplastic (UL94V-0)
 - Item ③ Terminal screw: Steel Zinc plating "-" slot type
 - Item ④ Firm wire chunk: steel Zinc plated
 - Item ⑤ Terminal body (metal housing): Steel, Zinc plating
 - Item ⑥ Solder pin: Copper, Tin plated
- Electrical cULus
- Voltage rating: 300VAC
 - Current rating: 30A
 - Wire range:
 - Solid wire (AWG): 10-24
 - Stranded wire (AWG): 10-24
 - Torque (Lb-In): 4.3
 - Screw: M3
 - Wire strip length: 15-16mm
 - Withstanding Voltage: 1.6KV
 - Operating temperature: -40°C to +115°C
 - Soldering temperature: 260°C ± 5°C / 5 Sec
 - Safety Approval:

mat'l. code				surface	tolerance	projection	product family		
				ASME Y14.5	ASME Y14.5		TERMINAL BLOCK		
ltr ecn no dr date				tolerances unless otherwise specified			title		
				angled	X.±0.5	MM	TERMINAL BLOCK		
				X'±1"	X.X±0.3		WIRE PROTECTOR, 90D WIRE INLET		
				dr	EVIN ZHONG 040114	scale	dwg no		
				enrg	EVIN ZHONG 040114		sheet 1 of 1		
				chr	HANKE FENG 040114		KHxx05x000J0G		
				appd	SHI JUN 040114		A4		
sheet index				revision			type		
sheet				sheet	1		CUSTOMER Drawing		