

Excellent Integrated System Limited

Stocking Distributor





Click to view price, real time Inventory, Delivery & Lifecycle Information:

[FCI](#)
[KR02010000J0G](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

PRODUCT NUMBER	PITCH
KRxx01x000J0G	5.00 mm

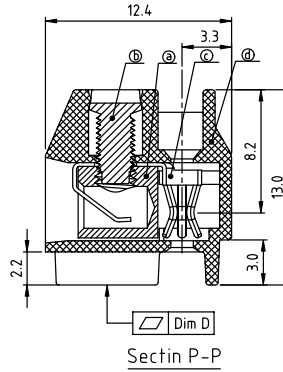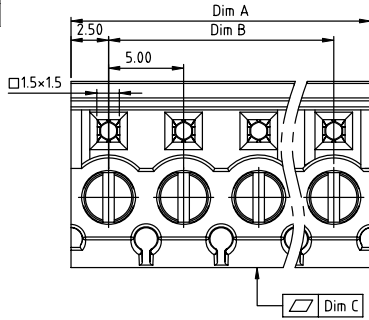

Material

- Item①Clamp: Brass(CuZn) Ni plated
- Item②Terminal screw: Steel Zinc plating "-" slot type
- Item③Female contact: PbZ (CuSn) Tin plated
- Item④Terminal (housing): Thermoplastic (UL94V-0)

Electrical cULus

- Voltage rating: 300V
- Current rating: 10A
- Wire range:
 - Solid wire(AWG): 14-26
 - Stranded wire(AWG): 14-26
- Torque: 3.5Lb-In
- Screw: M2.6
- Wire strip length: 5-6mm
- Withstanding Voltage: 1.6KV
- Operating temperature:-40°C to +115°C
- Safety Approval:

PART NO.: KR xx 01 x 0 00J0 G

N = Number of poles

Dim A=Nx5.0

Dim B=(N-1)x5.0

poles	Tolerance	Dim C	Dim D
2P	±0.05	≤0.05	≤0.05
3-6p	±0.15	≤0.10	≤0.10
7-12p	±0.20	≤0.20	≤0.20
13-18p	±0.30	≤0.30	≤0.30
19-24p	±0.40	≤0.40	≤0.40

Solid block	No. of poles	Body Color	RoHS compliant (lead<4%) In copper Alloy
02	2 poles	0 Black (RAL9005)	
03	3 poles	2 Red (RAL3001/D)	
...	...	3 Orange(RAL2011/P)	
24	24 poles	4 Yellow(RAL1018/A)	
		5 Green(RAL6018/T)	
		6 Blue (RAL5015/A)	
		8 Grey(RAL7035/D)	
		9 White(RAL1102)	
		C Green(RAL6018/U)	

mat'l. code	surface	tolerance	projection	product family
ltr ecn no dr date	ASME Y14.5	ASME Y14.5	MM	TERMINAL BLOCK
	tolerances unless otherwise specified			
	angled	X.±0.5		title
	X'±1"	X.X±0.3		TERMINAL BLOCK
		X.XX±0.1	scale	PLUGGABLE,180° WIRE INLET,SOLID BLOCK,WITHOUT HOOK
dr	EVIN ZHONG	041614		dwg no
enrg	EVIN ZHONG	041614		sheet 1 of 1
chr	HANKE FENG	041614		size
appd	SHI JUN	041614		A4
sheet index	revision sheet	A 1		type
				CUSTOMER Drawing