

Excellent Integrated System Limited





Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[FCI](#)
[KS02015000J0G](#)

For any questions, you can email us directly:
sales@integrated-circuit.com

PRODUCT NUMBER	PITCH
KSxx01x000J0G	7.62 mm

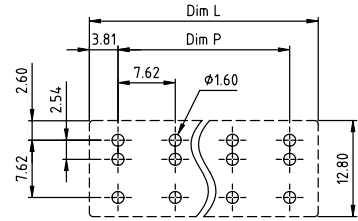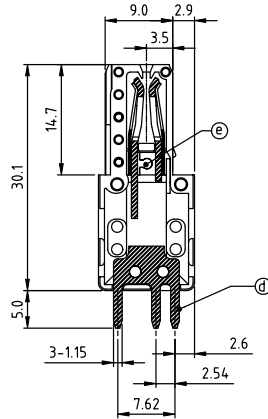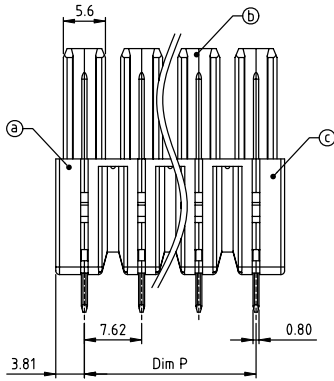

RECOMMENDED P.C.B. LAYOUT
TOP VIEW

Material:

- Item ① Left Cover :Thermoplastic (UL94 - V0)
- Item ② Middle Body :Thermoplastic (UL94 - V0)
- Item ③ Right Cover :Thermoplastic (UL94 - V0)
- Item ④ Pin: Copper Tin plated
- Item ⑤ Wire guard:Stainless Steel (ET 7.62)

Electrical: cULus

- Voltage rating: 300V
- Current rating: 4.1A
- Withstanding Voltage:1.6 KV
- Operating temperature:-40°C to +115°C
- Soldering temperature:260°C±5°C/5 Sec
- Safety approval: cULus

N=Number of poles

Dim L	N × 7.62
Dim P	(N-1) × 7.62

Dimension

Poles	Tolerance
2P-5P	±0.20
6P-8P	±0.30
9P-12P	±0.35
13P-16P	±0.40

PART NO.: K S xx 0 1 x 0 00J0 G

- | | | | | | |
|---------------|-----|----------|---------------------|-----------------|-----------|
| End stackable | 0 | Color | Black (RAL9005) | RoHS compliant | (lead<4%) |
| No. of poles | 2 | | Red (RAL3001/D) | In copper Alloy | |
| | 02 | | Orange(RAL2011/P) | | |
| | 03 | 3 poles | 4 Yellow(RAL1018/A) | | |
| | ... | ... | 5 Green(RAL6018/T) | | |
| | 16 | 16 poles | 6 Blue (RAL5015/A) | | |
| | | | 8 Grey(RAL7035/D) | | |
| | | | 9 White(RAL1102) | | |
| | | | C Green(RAL6018/U) | | |

mat'l. code	surface ASME Y14.5	tolerance ASME Y14.5	projection	product family	TERMINAL BLOCK
ltr	ecn	no	dr	date	title
					TERMINAL BLOCK
					PLUGGABLE PLUG, WITH SOLDER PIN, VERTICAL
					dwg no
					KSxx01x000J0G
					sheet 1 of 1
					size
					A4
					type
					CUSTOMER Drawing
sheet index	revision sheet	A	1		