

Excellent Integrated System Limited





Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[FCI](#)
[KU02C05000J0G](#)

For any questions, you can email us directly:
sales@integrated-circuit.com

PRODUCT NUMBER	PITCH
KUxxC0x000J0G	15.00 mm

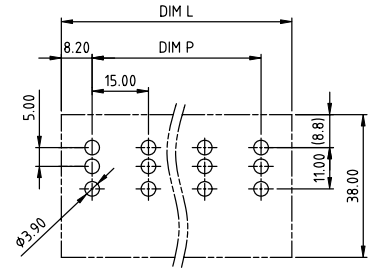

RECOMMENDED P.C.B LAYOUT
TOP VIEW

Material:
 ● Item ② Terminal housing: Thermoplastic (UL94V-0)
 ● Item ⑤ Male contact: Copper: Gold plated.

Electrical: cULus
 ● Voltage rating: 600 V
 ● Current rating: 115 A
 ● Withstanding Voltage: 2.2 KV
 ● Operating temperature: -40°C to +115°C
 ● Soldering temperature: 260°C±5°C/5 Sec
 ● Safety Approval: cULus

PART NO.: KU xx C 0 x 0 00J0 G

Dim L=(N-1)×15.00+16.4
 Dim P=(N-1)×15.00

N=Number of poles	
Poles	Tolerance
2p-4p	±0.20
5p-7p	±0.35
8p-10p	±0.50

Solid block	No. of poles	Color	RoHS compliant (lead<4%) In copper Alloy
0	2	Black (RAL9005)	
02	3	Red (RAL3001/D)	
03	4	Orange(RAL2011/P)	
...	...	Yellow(RAL1018/A)	
5	5	Green(RAL6018/T)	
6	6	Blue (RAL5015/A)	
8	8	Grey(RAL7035/D)	
9	9	White(RAL1102)	
C	10	Green(RAL6018/U)	

mat'l. code	surface ASME Y14.5	tolerance ASME Y14.5	projection	product family TERMINAL BLOCK
ltr ecn no dr date	tolerances unless otherwise specified		MM	title TERMINAL BLOCK PLUGGABLE SOCKET ,VERTICAL
	angled	X.±0.5	scale	dwg no KUxxC0x000J0G
	line	X.X±0.3		sheet 1 of 1 size A4
	X'±1'	X.XX±0.1		type CUSTOMER Drawing
dr	EVIN ZHONG	050814	FCI	
enqr	EVIN ZHONG	050814		
chr	HANKE FENG	050814		
appd	SHI JUN	050814		
sheet index	revision sheet	A 1		