

Excellent Integrated System Limited

Stocking Distributor





Click to view price, real time Inventory, Delivery & Lifecycle Information:

[FCI](#)
[NJ02015000J0G](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

PRODUCT NUMBER	PITCH
NJxx01x000J0G	5.00mm

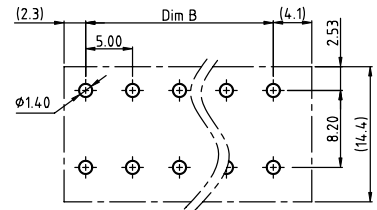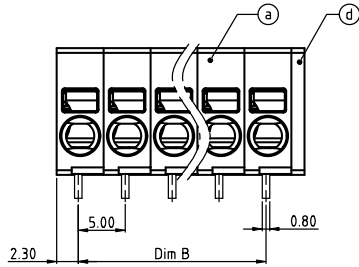

RECOMMENDED P.C.B LAYOUT
TOP VIEW

Material:
 ●Item①Terminal housing: Thermoplastic (UL 94V-0)
 ●Item②Spring clamp: Stainless steel
 ●Item③Solder pin: Brass, Tin plated
 ●Item④Terminal cover: Thermoplastic (UL 94V-0)

Electrical: cULus
 ●Voltage rating: 300 V
 ●Current rating(Sol): 13A
 ●Current rating(Str): 16 A
 ●Wire range:
 ●Solid wire(AWG): 14-24
 ●Stranded wire(AWG): 12-24
 ●Wire strip length: 9-10mm
 ●Withstanding Voltage: 1.6KV
 ●Operating temperature: -40°C to +115°C
 ●Soldering temperature: 260°C±5°C/5 Sec
 ●Safety Approval:

N=Number of poles
 Dim A=Nx5.00+1.40
 Dim B=(N-1)x5.00

PART NO.: NJ xx 01 x 000J0 G

POLES	Dim A	Dim B
1p	±0.10	
2-6p	±0.10	±0.10
7-12p	±0.20	±0.20
13-18p	±0.30	±0.30
19-24p	±0.40	±0.40

No. of poles 0 Black (RAL9005)
 End Stackable 2 Red (RAL3001/D)
 01 1 poles 3 Orange(RAL2011/P)
 02 2 poles 4 Yellow(RAL1018/A)
 ... 5 Green(RAL6018/T)
 24 24 poles 6 Blue (RAL5015/A)
 7 Grey(RAL7004/P)
 8 White(RAL1102)
 C Multiple colors

Color
 RoHS compliant (lead<4%)
 In copper Alloy

mat'l. code	surface	tolerance	projection	product family
	ASME Y14.5	ASME Y14.5		TERMINAL BLOCK
ltr ecn no dr date	tolerances unless otherwise specified			title
	angled	X.±0.5	MM	TERMINAL BLOCK
	linear	X.X±0.3		SPRING CLAMP,180D WIRE INLET
	X'±1"	X.XX±0.1	scale	dwg no
dr	EVIN ZHONG	060514		sheet 1 of 1
enr	EVIN ZHONG	060514		size
chr	HANKE FENG	060514		A4
appd	SHI JUN	060514		NJxx01x000J0G
sheet index	revision sheet	A 1		type
				CUSTOMER Drawing