

Excellent Integrated System Limited

Stocking Distributor




Click to view price, real time Inventory, Delivery & Lifecycle Information:

[FCI](#)
[TJ03015000J0G](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

PRODUCT NUMBER	PITCH
TJxx01x000J0G	7.62 mm

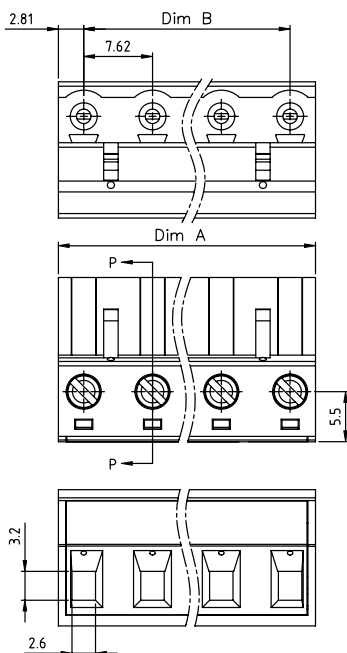

Material

- Item **a** Clamp: Brass(CuZn) Ni plated
- Item **b** Terminal screw: Steel Zinc plating “-” slot type
- Item **c** Female contact: High conductivity copper ,Tin plated
- Item **d** Terminal Cover: Thermoplastic (UL94V-0)
- Item **e** Terminal housing: Thermoplastic (UL94V-0)

Electrical cULus

- Voltage rating: 300VAC
- Current rating: 20A
- Wire range:
- Solid wire(AWG): 12-24
- Stranded wire(AWG): 12-24
- Torque: 5Lb-In
- Screw: M3
- Wire strip length: 7-8mm
- Withstanding Voltage: 1.6KV
- Operating temperature: -40°C to +115°C
- Safety Approval:

N = Number of poles
Dim A=(N-1)X7.62+5.62
Dim B=(N-1)x7.62

Poles	Tolerance
2p-4p	± 0.15
5p-8p	± 0.20
9p-12p	± 0.30
13p-16p	± 0.40

TJ xx 01 x 0 00J0 G

No. of poles	Color	RoHS compliant (lead<4%) in copper Alloy
02 2 poles	0 Black (RAL9005)	
03 3 poles	2 Red (RAL3001/D)	
...	3 Orange(RAL2011/P)	
...	4 Yellow(RAL1018/A)	
16 16 poles	5 Green(RAL6018/T)	
	6 Blue (RAL5015/A)	
	8 Grey(RAL7035/D)	
	9 White(RAL1102)	
	C Green(RAL6018/U)	

mat'l. code					surface ASME Y14.5		tolerance ASME Y14.5		projection 		product family TERMINAL BLOCK						
ltr	ecn	no	dr	date	tolerances unless otherwise specified							title					
					angles		inset		X,±0.5		TERMINAL BLOCK						
									X.X±0.3		PLUGGABLE PLUG,WITHOUT FLANGE						
					X"±1"				X.XX±0.1		scale						
dr	HANKE FENG				032514				dwg no		sheet 1 of 1		size				
engr	HANKE FENG				032514				TJxx01x000JOG		A4						
chr	SHI JUN				032514												
appd	SHI JUN				032514												
sheet index	revision sheet		A	1													
									type CUSTOMER Drawing								