

Excellent Integrated System Limited

Stocking Distributor




Click to view price, real time Inventory, Delivery & Lifecycle Information:

[FCI](#)
[V702A25000J0G](#)




For any questions, you can email us directly:

sales@integrated-circuit.com

PRODUCT NUMBER	PITCH
V7xxA2x000J0G	7.50 mm

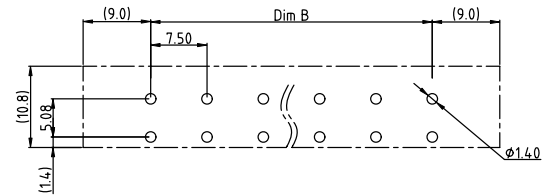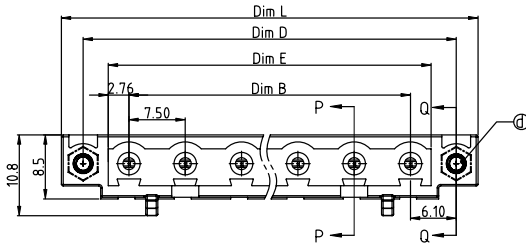

RECOMMENDED P.C.B LAYOUT
TOP VIEW

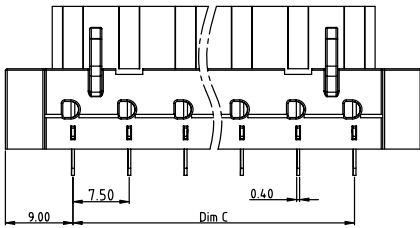

- Material:
- Item①Terminal body:Thermoplastic (UL94 V-0)
 - Item②Terminal Cover:Thermoplastic (UL94 V-0)
 - Item③Female contact:PhBz(CuSn),Tin plated
 - Item④With flange Nut: Brass M 2.5
- Electrical cULus
- Voltage rating: 300VAC
 - Current rating: 10A
 - Withstanding Voltage: 1.6kv
 - Operating temperature: -40°C to +115°C
 - Soldering temperature: 260°C±5°C/5 Sec
 - Safety Approval: cULus

N=Number of poles
Dim L=(N-1)×7.5+18
Dim B=(N-1)×7.50
Dim C=(N-1)×7.50
Dim D=(N-1)×7.5+12.2
Dim E=(N-1)×7.5+5.52

poles	Tolerance
2-5p	±0.15
6-10p	±0.25
11-16p	±0.35

PART NO.: V7 xx A 2 x 0 00J0 G

Solid block	No. of poles	Color	RoHS compliant (lead<4%) In copper Alloy
0	2	Black (RAL9005)	
2	3	Red (RAL3001/D)	
02	3	Orange(RAL2011/P)	
03	4	Yellow(RAL1018/A)	
...	5	Green(RAL6018/T)	
...	6	Blue (RAL5015/A)	
16	8	Grey(RAL7035/D)	
	9	White(RAL1102)	
	C	Green(RAL6018/U)	

mat'l. code	surface	tolerance	projection	product family
ASME Y14.5	ASME Y14.5	ASME Y14.5	TERMINAL BLOCK	
tr	ec	no	dr	date
tolerances unless otherwise specified				
angled		X.±0.5		
mm		X.X±0.3		
X'±1"		X.XX±0.1		
dr	EVIN ZHONG	043014		
enr	EVIN ZHONG	043014		
chr	HANKE FENG	043014		
appd	SHI JUN	043014		
sheet	revision	A		
index	sheet	1		