

Excellent Integrated System Limited

Stocking Distributor


Click to view price, real time Inventory, Delivery & Lifecycle Information:

[FCI](#)
[V902515400J0G](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

PRODUCT NUMBER	PITCH
V9xx51x400J0G	5.08 mm

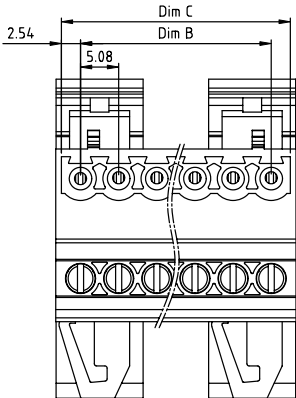

Dimension

Dim A	$(N-1) \times 5.08 + 6.60$
Dim B	$(N-1) \times 5.08$
Dim C	$N \times 5.08$

N=Number of poles

Poles	Tolerance
2P - 6P	± 0.15
7P - 12P	± 0.20
13P - 18P	± 0.30
19P - 24P	± 0.40

PART NO.: V9 xx 51 x 4 00J0 G



Solid block	0	Color	0	Black (RAL9005)	RoHS compliant (lead<4%) In copper Alloy
No. of poles	2		2	Red (RAL3001/D)	
02	2 poles		3	Orange (RAL2011/P)	
03	3 poles		4	Yellow (RAL1018/A)	
...	...		5	Green (RAL6018/T)	
24	24 poles		6	Blue (RAL5015/A)	
			8	Grey (RAL7035/D)	
			9	White (RAL1102)	
			C	Green (RAL6018/U)	

Material:

- Item (a) Clamp: Brass Ni plated
- Item (b) Terminal (housing): Thermoplastic (UL94V-0)
- Item (c) Terminal (Cover): Thermoplastic (UL94V-0)
- Item (d) Male contact: PhBz, Tin plated.
- Item (e) Terminal screw: Steel Zinc plating " - " slot type
- Item (f) Terminal (track): Thermoplastic (UL94V-0)

Electrical: cULus

- Voltage rating: 300V
- Current rating: 12A
- Wire range:
 - Solid wire (AWG): 12-30
 - Stranded wire (AWG): 12-30
- Torque: 5.2Lb-in.
- Screw: M3
- Wire strip length: 6-7 mm
- Withstanding Voltage: 1.6KV
- Operating temperature: -40°C to +115°C
- Safety Approval: cULus

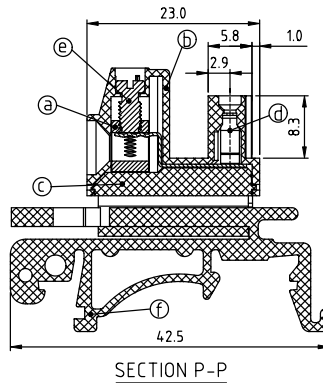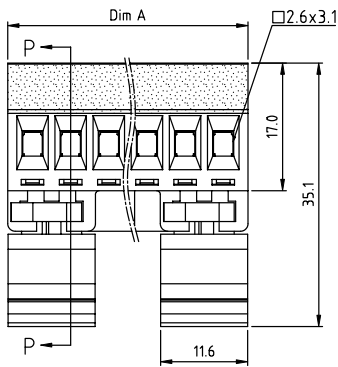

mat'l. code	surface	tolerance	projection	product family
ltr ecn no dr date	ASME Y14.5	ASME Y14.5	MM	TERMINAL BLOCK
	tolerances unless otherwise specified			title
angles	X.±0.5			TERMINAL BLOCK
X'±1"	X.X±0.3			PLUGGABLE PLUG, DIN RAIL MOUNTING, B TYPE
dr EVIN ZHONG 050414	X.XX±0.1			dwg no V9xx51x400J0G
enr EVIN ZHONG 050414				sheet 1 of 1
chr HANKE FENG 050414				size A4
appd SHI JUN 050414				type CUSTOMER Drawing
sheet index	revision sheet	A 1		