

Excellent Integrated System Limited

Stocking Distributor






Click to view price, real time Inventory, Delivery & Lifecycle Information:

[FCI](#)
[VF04325000J0G](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

PRODUCT NUMBER	PITCH
VFxx32x000J0G	3.81 mm

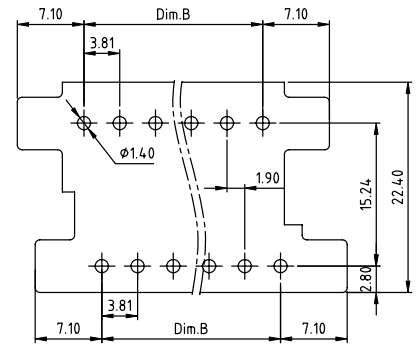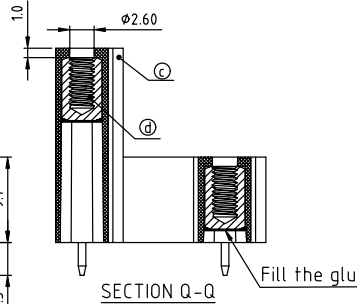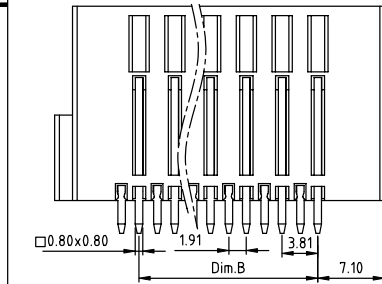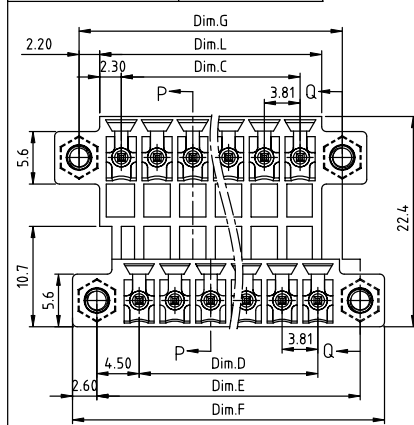

RECOMMENDED P.C.B LAYOUT
TOP VIEW

PART NO.: VF xx 3 2 x 0 00J0 G

Solid block 0 Black (RAL9005)
No. of poles 2 Red (RAL3001/D)
04 2x2poles 3 Orange(RAL2011/P)
06 2x3poles 4 Yellow(RAL1018/A)
... .. 5 Green(RAL6018/T)
48 2x24poles 6 Blue (RAL5015/A)
... .. 8 Grey(RAL7035/D)
... .. 9 White(RAL1102)
... .. C Green(RAL6018/U)

Material:

- Item③ Long pin: Copper, Tin plated
- Item④ Short pin: Copper, Tin plated
- Item⑤ Terminal (housing): Thermoplastic (UL94V-0)
- Item⑥ With flange nut: Brass, M2.5

Electrical

- cULus
- Voltage rating: 300VAC
- Current rating: 10A
- Withstanding Voltage: 1.6KV
- Operating temperature: -40°C to +115°C
- Soldering temperature: 260°C±5°C/5 Sec
- Safety Approval: cULus

Dimension

Dim.L	(N/2-1) x 3.81+4.60
Dim.B	(N/2-1) x 3.81
Dim.C	(N/2-1) x 3.81
Dim.D	(N/2-1) x 3.81
Dim.E	(N/2-1) x 3.81+9.00
Dim.F	(N/2-1) x 3.81+14.20
Dim.G	(N/2-1) x 3.81+9.00

N=number of poles

Poles	Tolerance
2x2P-2x5P	±0.15
2x6P-2x10P	±0.20
2x11P-2x13P	±0.25
2x14P-2x16P	±0.30

mat'l. code	surface ASME Y14.5	tolerance ASME Y14.5	projection MM	product family TERMINAL BLOCK
ltr ecn no dr date	tolerances unless otherwise specified	angles X±0.5 X.X±0.3 X.XX±0.1	scale	title TERMINAL BLOCK
dr EVIN ZHONG 042914	enrg EVIN ZHONG 042914	chr HANKE FENG 042914	appd SHI JUN 042914	PLUGGABLE SOCKET, WITH FLANGE, VERTICAL
sheet index	revision sheet	A 1		dwg no VFxx32x000J0G
				type CUSTOMER Drawing

form: A4mmXlc

PDS: Rev :A 3

STATUS:Released

Printed: Jul 01, 2014