

Excellent Integrated System Limited

Stocking Distributor





Click to view price, real time Inventory, Delivery & Lifecycle Information:

[FCI](#)
[VJ02015200J0G](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

PRODUCT NUMBER	PITCH
VJxx01x200J0G	5.00mm

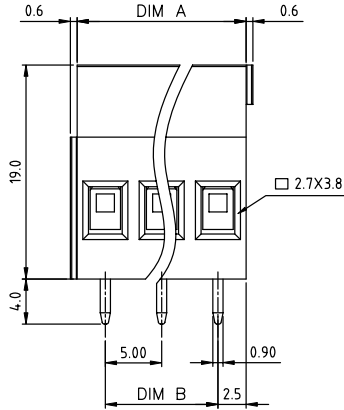

RECOMMENDED P.C.B LAYOUT
TOP VIEW

Material:
 ●Item (a) Terminal housing: Thermoplastic (UL 94V-0)
 ●Item (b) Clamp: Brass Ni plated
 ●Item (c) Solder pin: Brass Tin plated
 ●Item (d) Terminal screw: Steel Zinc plating"-slot type

Electrical cULus / VDE
 ●Voltage rating: 300VAC / 450V
 ●Current rating: 20A / 24A
 ●Wire range: 0.2-2.5mm²
 ●Solid wire (AWG): 12-30
 ●Stranded wire (AWG): 12-30
 ●Torque: 3.5 Lb-In / 0.5 N.m
 ●Screw: M3
 ●Wire strip length: 6-7mm
 ●Withstanding Voltage: 1.6KV / 2.5KV
 ●Operating temperature: -40°C to +115°C
 ●Soldering temperature: 260°C±5°C/5 Sec
 ●Safety Approval: cULus VDE

Dimension A&B

DIM A	N×5.0
DIM B	(N-1)×5.0

N=Number of poles

Poles	Dim A&B Tolerance
2P-4P	±0.15
5P-8P	±0.25
9P-16P	±0.35
17P-24P	±0.40

PART NO.: VJ xx 0 1 x 2 00J0 G

End stackable 0 Black (RAL9005)
 No. of poles 2 Red (RAL3001/D)
 02 2 poles 3 Orange (RAL2011/P)
 03 3 poles 4 Yellow (RAL1018/A)
 5 Green (RAL6018/T)
 24 24 poles 6 Blue (RAL5015/A)
 8 Grey (RAL7035/D)
 9 White (RAL1102)
 C Green (RAL6018/U)

mat'l. code	surface	tolerance	projection	product family
ASME Y14.5	ASME Y14.5	ASME Y14.5	TERMINAL BLOCK	
tr	ec	no	dr	date
tolerances unless otherwise specified				
angled		X.±0.5		
mm		X.X±0.3		
X'±1"		X.XX±0.1		
dr	EVIN	ZHONG	040914	
enr	EVIN	ZHONG	040914	
chr	HANKE	FENG	040914	
appd	SHI	JUN	040914	
sheet	revision	A		
index	sheet	1		