

Excellent Integrated System Limited

Stocking Distributor




Click to view price, real time Inventory, Delivery & Lifecycle Information:

[FCI](#)
[YK22302030J0G](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

PRODUCT NUMBER	PITCH
YK223xx0x0J0G	6.35 mm

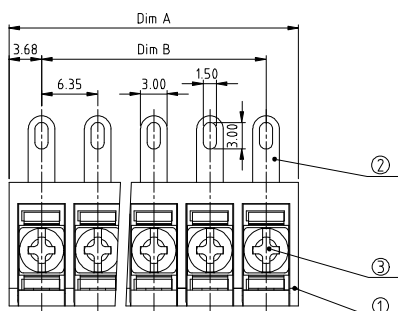

MATERIALS & ELECTRICAL	cULus	CQC
RATED VOLTAGE & CURRENT:	250 V, 10 A	/ 250 V, 9 A
WITHSTAND VOLTAGE:	AC 2000 V/Min	
INSULATION RESISTANCE:	1000 M Ω OR MORE AT DC 500 V	
OPERATING TEMPERATURE RANG:	-40 °C ~ +115 °C	
SCREW TORQUE VALUE:	5.3 Lb.-In.	
WIRE RANGE:	22 - 18 AWG	
1) HOUSING:	Thermoplastic, UL 94 V-0 BLACK	
2) TERMINAL:	BRASS, 0.8t	
3) TERMINAL SCREWS:	STEEL, M3	
APPROVAL:	 	

DIMENSION	
Dim A	$N \times 6.35 + 1.0$
Dim B	$(N-1) \times 6.35$

N=Number of poles

Poles	Tolerance
2p-5p	±0.20
6p-10p	±0.25
11p-16p	±0.35
17p-24p	±0.40
25p-31p	±0.50

PART NO.:YK 223xx 0 x 0 J0G

No.	of poles
02	2 poles
03	3 poles
...	...
31	31 poles

Plated		
Code	Terminal	Screw
0	G/F	G/F
1	G/F	Zinc
2	Tin	G/F
3	Tin	Zinc

RoHS compliant
(lead<4%)
In copper Alloy

mat'l. code				surface ASME Y14.5 ✓		tolerance ASME Y14.5		projection 		product family TERMINAL BLOCK			
ltr	ecn	no	dr	date	tolerances unless otherwise specified				 MM	title			
					angles $X \pm 0.5$ $X.X \pm 0.3$ $X.XX \pm 0.1$					TERMINAL BLOCK			
					max. thickness $X \pm 1$					BARRIER TYPE			
				engr	EVAN LU		061614		dwg no		sheet 1 of 1		size
				chr	HANKE FENG		061614		YK232x0x0J0G				A4
				appd	SHI JUN		061614		type		CUSTOMER		Drawing
sheet index		revision sheet		A	1								