



Distributor of FCI: Excellent Integrated System Limited

Datasheet of YK30602330J0G - Connector Barrier Block Strip 2 Circuit 0.300" (7.62mm)

Contact us: sales@integrated-circuit.com Website: www.integrated-circuit.com

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:



[FCI](#)

[YK30602330J0G](#)

For any questions, you can email us directly:


sales@integrated-circuit.com

PRODUCT NUMBER	PITCH
YK306xx3x0J0G	7.62 mm

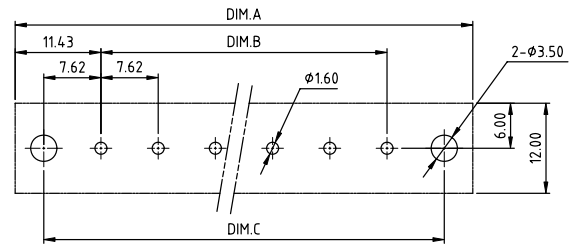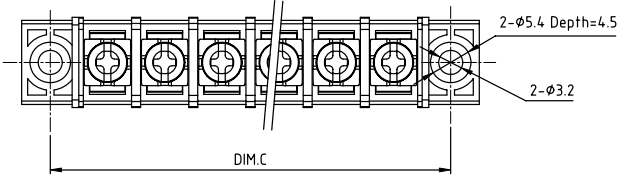

RECOMMENDED P.C.B. LAYOUT
TOP VIEW

MATERIALS ELECTRICAL
RATED VOLTAGE & CURRENT: 300 V, 15 A
WITHSTAND VOLTAGE: AC 2000 V/Min
INSULATION RESISTANCE: 1000 MΩ OR MORE AT DC 500 V
OPERATING TEMPERATURE RANGE: -40 °C ~ +115 °C
SCREW TORQUE VALUE: 5.2 Lb-in.
WIRE RANGE: 14 ~ 22 AWG
1) HOUSING: THERMOPLASTIC, UL 94 V-0 BLACK
2) TERMINAL: BRASS, 0.8t
3) TERMINAL SCREWS: STEEL, M3

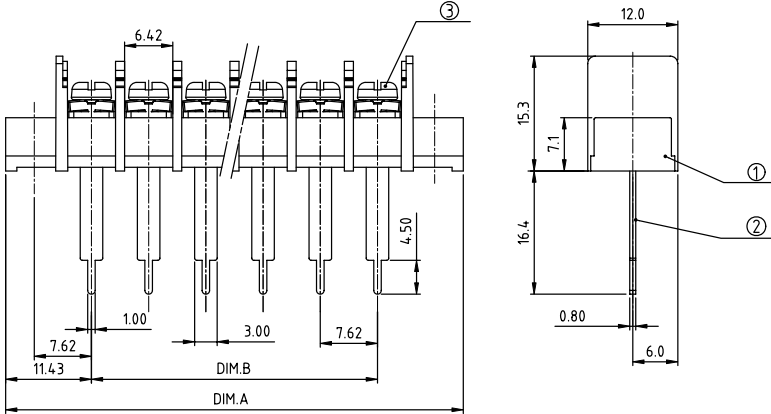

DIMENSION

Dim A	(N+2)×7.62
Dim B	(N-1)×7.62
Dim C	(N+1)×7.62

N=Number of poles

Poles	Tolerance
2p-4p	±0.20
5p-10p	±0.30
11p-16p	±0.40
17p-20p	±0.50

PART NO.: YK 306xx 3 x 0 J0G

No. of poles	Code	Terminal	Screw	RoHS compliant (lead<4%) In copper Alloy
02 2 poles	0	G/F	G/F	
03 3 poles	1	G/F	Zinc	
...	2	Tin	G/F	
20 20 poles	3	Tin	Zinc	

mat'l. code	surface ASME Y14.5 ✓	tolerance ASME Y14.5	projection	product family
ltr	ecn no	dr	date	TERMINAL BLOCK
				title
				TERMINAL BLOCK
				BARRIER TYPE, WITH FLANGE
				scale
				MM
				dwg no
				YK306xx3x0J0G
				sheet 1 of 1
				size A4
				type CUSTOMER Drawing
sheet index	revision sheet	A	1	