

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[FCI](#)

[YK33102030J0G](#)



For any questions, you can email us directly:

sales@integrated-circuit.com



Copyright FCI

FCIconnect.com

PRODUCT NUMBER	PITCH
YK331xx0x0J0G	8.25 mm

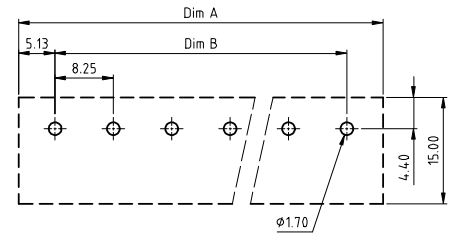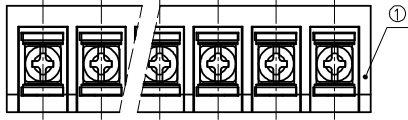

RECOMMENDED P.C.B. LAYOUT
TOP VIEW

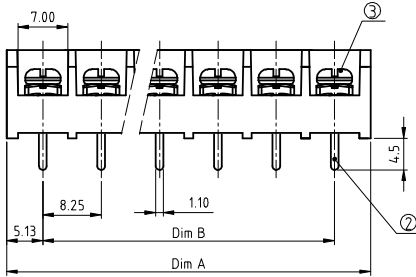

MATERIALS & ELECTRICAL
 RATED VOLTAGE & CURRENT: 300 V, 20 A / 300 V, 32 A
 WITHSTAND VOLTAGE: AC 2500V/Min
 INSULATION RESISTANCE: 1000 MΩ OR MORE AT DC 500 V
 OPERATING TEMPERATURE RANGE: -40 °C +115 °C
 SCREW TORQUE VALUE: 8.8 Lb-In
 WIRE RANGE: 22 - 12 AWG
 1) HOUSING: Thermoplastic, UL 94 V-0 BLACK
 2) TERMINAL: BRASS, 0.8t
 3) TERMINAL SCREWS: STEEL, M3
 APPROVAL:

DIMENSION	
Dim A	N×8.25±2.0
Dim B	(N-1)×8.25

N=Number of poles

Poles	Tolerance
2p-5p	±0.20
6p-10p	±0.25
11p-16p	±0.35
17p-24p	±0.40
25p-32p	±0.50

PART NO.: YK 331xx 0 x 0 J0G

No. of poles
02 2 poles
03 3 poles
...
32 32 poles

Plated		
Code	Terminal	Screw
0	G/F	G/F
1	G/F	Zinc
2	Tin	G/F
3	Tin	Zinc

RoHS compliant
(lead<4%)
In copper Alloy

mat'l. code	surface	tolerance	projection	product family
ltr	ecr	no	dr	date
tolerances unless otherwise specified				ASME Y14.5
X±0.5				ASME Y14.5
X.X±0.3				ASME Y14.5
X'±1"				ASME Y14.5
X.XX±0.1				ASME Y14.5
dr				EVAN LU 061614
enrg				EVAN LU 061614
chr				HANKE FENG 061614
appd				SHI JUN 061614
sheet index				revision sheet
A				1
product family				TERMINAL BLOCK
title				TERMINAL BLOCK
BARRIER TYPE				
dwg no				sheet 1 of 1 size
YK331xx0x0J0G				A4
type				CUSTOMER Drawing

form: A4mmXLC

PDS: Rev :A

STATUS:Released

Printed: Jul 16, 2014