

Excellent Integrated System Limited

Stocking Distributor



Click to view price, real time Inventory, Delivery & Lifecycle Information:

[FCI](#)
[YK44502030J0G](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

PRODUCT NUMBER	PITCH
YK445xx0x0J0G	9.50 mm

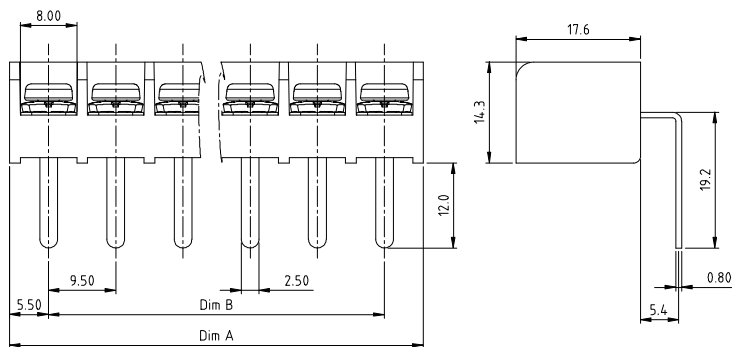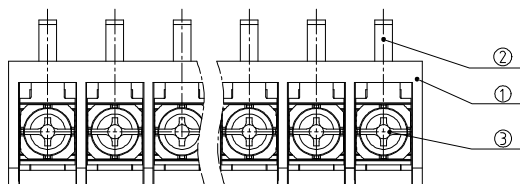

MATERIALS ELECTRICAL	cULus	CQC
RATED VOLTAGE & CURRENT:	300 V, 30A	/ 300V 24A
WITHSTAND VOLTAGE:	AC2500V/min	
INSULATION RESISTANCE:	1000 M Ω OR MORE	AT DC 500 V
OPERATING TEMPERATURE RANG:	-40 °C ~ +115 °C	
SCREW TORQUE VALUE:	10.54 Lb.-In	/ 0.8Nm
WIRE RANGE:	22 ~ 10 AWG	/ 22-14 AWG
1) MOLDED PARTS:	Thermoplastic, UL 94 V-0 BLACK	
2) TERMINAL:	BRASS, 0.8t	
3) TERMINAL SCREWS:	STEEL, M3.5	
APPROVAL:		

DIMENSION

Dim A	$N \times 9.5 + 1.5$
Dim B	$(N-1) \times 9.5$

N=Number of poles

Poles	Tolerance
2p-4p	± 0.20
5p-8p	± 0.25
9p-16p	± 0.35
17p-23p	± 0.40
24p-30p	± 0.50

PART NO.:YK 445xx 0 x 0 J0G

No. of poles	
02	2 poles
03	3 poles
...	...
30	30 poles

Plated		
Code	Terminal	Screw
0	G/F	G/F
1	G/F	Zinc
2	Tin	G/F
3	Tin	Zinc

RoHS compliant
(lead<4%)
In copper Alloy

mat'l. code					surface ASME Y14.5 ✓		tolerance ASME Y14.5		projection 		product family TERMINAL BLOCK					
ltr	ecn	no	dr	date	tolerances unless otherwise specified					MM 		title TERMINAL BLOCK		sheet 1 of 1		size
					angles X±0.5 X.X±0.3 X.XX±0.1					scale		BARRIER TYPE		dwg no YK445xx0x0J0G		A4
				engr	EVAN LU		061614						type		CUSTOMER Drawing	
				dr	EVAN LU		061614									
				chr	HANKE FENG		061614									
				appd	SHI JUN		061614									
sheet index		revision sheet		A	1											