

## Excellent Integrated System Limited


Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Weidmüller](#)  
[9537410000](#)

For any questions, you can email us directly:

[sales@integrated-circuit.com](mailto:sales@integrated-circuit.com)

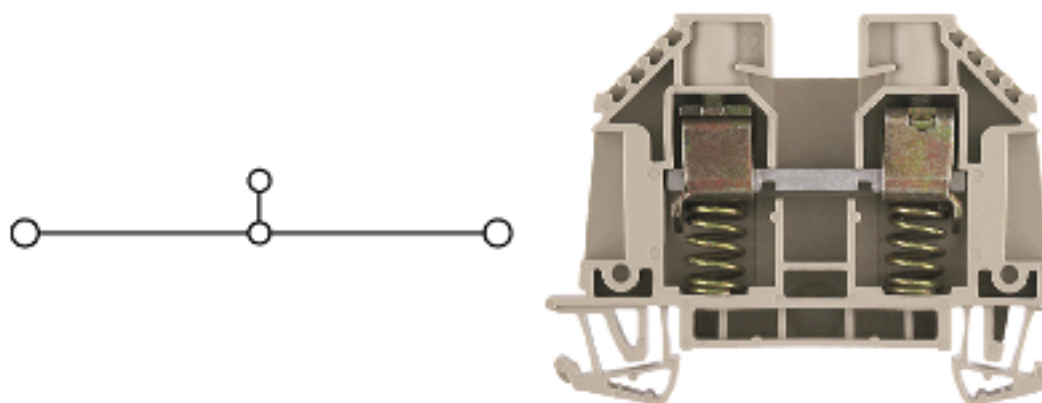

#### General ordering data

Order No.	9537410000
Part designation	WDU 10 SL/EN SW
Version	Special terminal, special connections, 10 mm <sup>2</sup> , Screw connection, PA 66, black, TS 35 + TS 32
EAN	4032248037407
Qty.	50 pc(s).

#### Product notes

Note, ordering data	Are suitable for a rated voltage of 630 V with pollution degree 2 (no larger soiling appears).
Note, technical data	ESI rated data: 500 V/36 A / 16 mm <sup>2</sup> stranded connection must be tightened with 2 Nm.
Product description	Spring below clamping yoke ensures additional contact stability.
Note, accessories	Hook-shaped cable lugs, wide design 0.25-1.5mm <sup>2</sup> , order no. 9036290000 (100 pcs.); and 1-2.5mm <sup>2</sup> thin version, order no. 9036300000 (100 pcs.)

#### PT OKIECEX/ATEX rating data

EU-type examination certificate	SIRA02ATEX3242U
Download, German	
Download English	SIRA02ATEX3242U_e.pdf
IECEX Certificate of Conformity	IECEXSIR05.0040U
Download	IECEXSIR05.0040U_e.pdf
ATEX voltage	275 V
ATEX current	50 A
ATEX conductor cross-section	10 mm <sup>2</sup>
IECEX voltage	275 V
IECEX current	50 A
IECEX conductor cross-section	10 mm <sup>2</sup>
Voltage when using cross-connections	CrossConnectionGuide.pdf
Operating temperature range	For operating temperature range see EC Design Test Certificate / IEC Ex-Certificate of Conformity

#### PT OKIECEEx/ATEX rating data

Marking EN 60079-7	Ex e II
--------------------	---------

#### 2 clampable conductors (H05V/H07V) with equal cross-section (rated connection)

Solid, min.	2.5 mm <sup>2</sup>
Solid, max.	4 mm <sup>2</sup>
Flexible, min.	2.5 mm <sup>2</sup>
Flexible, max.	4 mm <sup>2</sup>
Flexible with ferrule, min. (DIN 46228 pt 1)	1 mm <sup>2</sup>
Flexible with ferrule, max. (DIN 46228 pt 1)	4 mm <sup>2</sup>

#### Additional technical data

Colour of insulating material	black
Connection direction	on side
End plate required	Yes
Explosion-tested version "Ex e"	No
Installation advice	TS 35 + TS 32
Insulating material	PA 66
Levels cross-connected internally	No
No. of identical terminals	1
No. of levels	1
No. of terminal strips per level	2
Open sides	right
Operating temperature range	- 50 °C, + 120 °C
Product family	W-Series
Type of connection	Screwed
Type of mounting	Snap-on
UL 94 flammability rating of insulation material	V-0
Version	Feed-through terminal

#### CSA rating data

Voltage (CSA)	300 V
CSA current	65 A
Min. cross-section (CSA)	AWG 16
Max. cross-section (CSA)	AWG 8

#### Conductors for clamping (additional connection)

Flexible with ferrule, min. (DIN 46228 pt 1)	1.5 mm <sup>2</sup>
Flexible with ferrule, max. (DIN 46228 pt 1)	10 mm <sup>2</sup>

#### Conductors for clamping (rated connection)

Clamping range, min.	1.31 mm <sup>2</sup>
Clamping range, max.	16 mm <sup>2</sup>
Type of connection	Screw connection
2nd type of connection	screwed
Connection direction	on side
No. of connections	2
Stripping length	17 mm
Clamping screw	M 4
Blade size	1.0 x 5.5 mm

#### Conductors for clamping (rated connection)

Tightening torque range	1.2...2.4 Nm
Torque level with DMS electric screwdriver	4
Gauge to IEC 60947-1	A6
Solid, min.	1.5 mm <sup>2</sup>
Solid, max.	16 mm <sup>2</sup>
Stranded, min.	1.5 mm <sup>2</sup>
Stranded, max.	16 mm <sup>2</sup>
Flexible, min.	1 mm <sup>2</sup>
Flexible, max.	6 mm <sup>2</sup>
Flexible with ferrule, min. (DIN 46228/1)	1.5 mm <sup>2</sup>
Flexible with ferrule, max. (DIN 46228/1)	10 mm <sup>2</sup>
AWG conductor size, min.	AWG 16
AWG conductor size, max.	AWG 6
AWG conductor size, min.	1.31 mm <sup>2</sup>
AWG conductor size, max.	13.3 mm <sup>2</sup>

#### Dimensions

Width	9.9 mm
Height of lowest version	47 mm
Length	56.6 mm
Weight	21.84 g
TS 32 offset	13.5 mm
TS 35 offset	28.5 mm

#### Disconnect terminals

Torque level with DMS electric screwdriver	4
--	---

#### Rating data

Rated cross-section	10 mm <sup>2</sup>
Rated voltage	500 V
Rated impulse voltage	6 kV
Rated current	57 A
Standards	IEC 60947-7-1
Current with max. conductor	76 A
Pollution severity	3

#### UL rating data

Voltage (UL)	150 V
Current (UL)	50 A
Min. cross-section (UL)	AWG 16
Max. cross-section (UL)	AWG 8

#### Approvals

Approvals institutes



#### Classifications

ETIM 2.0	EC000897
----------	----------

#### Classifications

ETIM 3.0	EC000897
eClass 4.1	27-14-11-31
eClass 5.0	27-14-11-31
eClass 5.1	27-14-11-31

#### Similar products

Order No.	Part designation	Version
9537480000	WDU 10 SL	Special terminal, special connections, 10 mm <sup>2</sup> , Screw connection, Wemid, dark beige, TS 35
9537400000	WDU 10 SL SW	Special terminal, special connections, 10 mm <sup>2</sup> , Screw connection, PA 66, black, TS 35
9537490000	WDU 10 SL/EN	Special terminal, special connections, 10 mm <sup>2</sup> , Screw connection, Wemid, dark beige, TS 35 + TS 32