

## Excellent Integrated System Limited

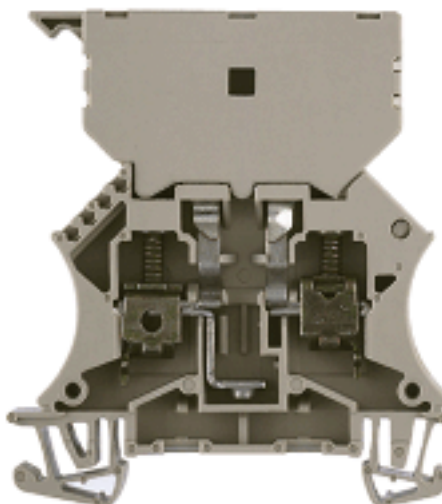
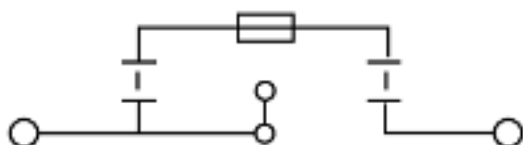
Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Weidmüller](#)  
[1014000000](#)

For any questions, you can email us directly:

[sales@integrated-circuit.com](mailto:sales@integrated-circuit.com)


**General ordering data**

Order No.	1014000000
Part designation	WSI 6/2 GZ/DEF63
Version	Fuse terminal, 6 mm <sup>2</sup> , Screw connection, Wemid, dark beige, TS 35
EAN	4008190006723
Qty.	25 pc(s).

**Product notes**

Note, ordering data	Max. power loss (1.6 W) at the cartridge fuse limits the rated current.
Note, technical data	Cartridge fuses or contact sleeves have to be inserted centrally.
Function	400V
Note, accessories	

**2 clampable conductors (H05V/H07V) with equal cross-section (rated connection)**

Solid, min.	0.5 mm <sup>2</sup>
Solid, max.	2.5 mm <sup>2</sup>
Flexible, min.	0.5 mm <sup>2</sup>
Flexible, max.	2.5 mm <sup>2</sup>
Flexible with ferrule, min. (DIN 46228 pt 1)	0.5 mm <sup>2</sup>
Flexible with ferrule, max. (DIN 46228 pt 1)	2.5 mm <sup>2</sup>

**Additional technical data**

Colour of insulating material	dark beige
Connection direction	on side
End plate required	Yes
Explosion-tested version "Ex e"	No
Installation advice	TS 35
Insulating material	Wemid
Levels cross-connected internally	No
No. of identical terminals	1
No. of levels	1

**Additional technical data**

No. of terminal strips per level	2
Open sides	right
Operating temperature range	- 50 °C, + 120 °C
Product family	W-Series
Type of connection	Screwed
Type of mounting	Snap-on
UL 94 flammability rating of insulation material	V-0
Version	Fuse terminal

**CSA rating data**

Voltage (CSA)	600 V
CSA current	16 A
Min. cross-section (CSA)	AWG 20
Max. cross-section (CSA)	AWG 8

**Conductors for clamping (additional connection)**

Flexible with ferrule, min. (DIN 46228 pt 1)	0.5 mm <sup>2</sup>
Flexible with ferrule, max. (DIN 46228 pt 1)	6 mm <sup>2</sup>

**Conductors for clamping (rated connection)**

Clamping range, min.	0.5 mm <sup>2</sup>
Clamping range, max.	10 mm <sup>2</sup>
Type of connection	Screw connection
2nd type of connection	screwed
Connection direction	on side
No. of connections	2
Stripping length	12 mm
Clamping screw	M 3.5
Blade size	4.0 x 0.8 mm
Tightening torque range	0.8...1.6 Nm
Torque level with DMS electric screwdriver	3
Gauge to IEC 60947-1	A5
Solid, min.	0.5 mm <sup>2</sup>
Solid, max.	10 mm <sup>2</sup>
Stranded, min.	1.5 mm <sup>2</sup>
Stranded, max.	10 mm <sup>2</sup>
Flexible, min.	0.5 mm <sup>2</sup>
Flexible, max.	10 mm <sup>2</sup>
Flexible with ferrule, min. (DIN 46228/1)	0.5 mm <sup>2</sup>
Flexible with ferrule, max. (DIN 46228/1)	6 mm <sup>2</sup>
Flexible, min., ferrule with plastic collar (DIN 46228 pt 4)	0.5 mm <sup>2</sup>
Flexible, max., ferrule with plastic collar (DIN 46228 pt 4)	6 mm <sup>2</sup>
AWG conductor size, min.	AWG 20
AWG conductor size, max.	AWG 8
AWG conductor size, min.	0.5 mm <sup>2</sup>
AWG conductor size, max.	10 mm <sup>2</sup>

#### Dimensions

Width	11.9 mm
Height of lowest version	67 mm
Length	60 mm
Weight	27.68 g
TS 35 offset	32 mm

#### Disconnect terminals

Torque level with DMS electric screwdriver	3
--	---

#### Display element

Operating voltage for display, max.	500 V
Type of voltage for indicator	AC

#### Fuse terminals

Cartridge fuse	G-Si. 1 x 1/4
Display	Without LED
Fuse holder (cartridge holder)	Pivoting
Operating voltage, max.	500
Type of voltage for indicator	AC

#### Rating data

Rated cross-section	6 mm <sup>2</sup>
Rated voltage	500 V
Rated impulse voltage	6 kV
Rated current	6.3 A
Standards	IEC 60947-7-3
Current with max. conductor	6.3 A
Pollution severity	3

#### UL rating data

Voltage (UL)	600 V
Current (UL)	20 A
Min. cross-section (UL)	AWG 20
Max. cross-section (UL)	AWG 8

#### Approvals

Approvals institutes



#### Classifications

eClass 4.1	27-14-11-16
------------	-------------

**Classifications**

eClass 5.0	27-14-11-16
eClass 5.1	27-14-11-16

**Similar products**

Order No.	Part designation	Version
1880430000	WSI 4/2	Fuse terminal, 4 mm <sup>2</sup> , Screw connection, Wemid, black, TS 35 + TS 32 + TS 15
1880410000	WSI 4/2/LD 10-36V AC/DC	Fuse terminal, 4 mm <sup>2</sup> , Screw connection, Wemid, black, TS 35
1880390000	WSI 4/2/LD 140-250V AC/DC	Fuse terminal, 4 mm <sup>2</sup> , Screw connection, Wemid, black, TS 35
1880440000	WSI 4/2/LD 30-70V AC/DC	Fuse terminal, 4 mm <sup>2</sup> , Screw connection, Wemid, black, TS 35
1880420000	WSI 4/2/LD 60-150V AC/DC	Fuse terminal, 4 mm <sup>2</sup> , Screw connection, Wemid, black, TS 35
1886590000	WSI 4/LD 10-36V AC/DC	Fuse terminal, 4 mm <sup>2</sup> , Screw connection, Wemid, black, TS 35
1886560000	WSI 4/LD 30-70V AC/DC	Fuse terminal, 4 mm <sup>2</sup> , Screw connection, Wemid, black, TS 35
1886570000	WSI 4/LD 60-150V AC/DC	Fuse terminal, 4 mm <sup>2</sup> , Screw connection, Wemid, black, TS 35
1011000000	WSI 6	Fuse terminal, 6 mm <sup>2</sup> , Screw connection, Wemid, dark beige, TS 35
1011060000	WSI 6 OR	Fuse terminal, 6 mm <sup>2</sup> , Screw connection, Wemid, Orange, TS 35
1011010000	WSI 6 SW	Fuse terminal, 6 mm <sup>2</sup> , Screw connection, Wemid, black, TS 35
1028200000	WSI 6 TR	Fuse terminal, 6 mm <sup>2</sup> , Screw connection, Wemid, transparent, TS 35
1014300000	WSI 6/2/LD 60-150VDC/AC	Fuse terminal, 6 mm <sup>2</sup> , Screw connection, Wemid, dark beige, TS 35
1014400000	WSI 6/2/LD 250AC	Fuse terminal, 6 mm <sup>2</sup> , Screw connection, Wemid, dark beige, TS 35
1014100000	WSI 6/2/LD 10-36V DC/AC	Fuse terminal, 6 mm <sup>2</sup> , Screw connection, Wemid, dark beige, TS 35
1014200000	WSI 6/2/LD 30-70V DC/AC	Fuse terminal, 6 mm <sup>2</sup> , Screw connection, Wemid, dark beige, TS 35
1012300000	WSI 6/LD 60-150V DC/AC	Fuse terminal, 6 mm <sup>2</sup> , Screw connection, Wemid, dark beige, TS 35
1012400000	WSI 6/LD 250AC	Fuse terminal, 6 mm <sup>2</sup> , Screw connection, Wemid, dark beige, TS 35
1011300000	WSI 6/LD 10-36V DC/AC	Fuse terminal, 6 mm <sup>2</sup> , Screw connection, Wemid, dark beige, TS 35
1012200000	WSI 6/LD 30-70V DC/AC	Fuse terminal, 6 mm <sup>2</sup> , Screw connection, Wemid, dark beige, TS 35