

## **Excellent Integrated System Limited**

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Cynergy3](#)  
[SSV66A35B110SPM12](#)

For any questions, you can email us directly:

[sales@integrated-circuit.com](mailto:sales@integrated-circuit.com)



## SSV66-SPM12

### *Side mount dual level vertical switch, internal mount*



- **Side mount vertical switch**
- **Dual switch point for high/low indication**
- **Stainless steel 316L**
- **Operating temperature to 120°C**
- **M12 circular connector for easy installation**

#### Technical Specification

Mounting style	Internal	Connaction	M12 circular 4 pole
Mounting thread	M16	Cable size	N/A
Float & Stem material	316grade SS	Cable conductor insulation	PTFE
Maximum Temperature	120°C	Cable sheath material	N/A
Maximum pressure	20 bar	Cable temperature rating	180°C
Float SG	0.7	Sealing Washer	Nitrile
Minimum fluid SG	0.75	Tightening torque for fixing nut	2.0kg/cm


#### Electrical Specification

Contact Form	Upper-make on rise	Lower-make on fall
Switching Power Max	VA	50
Switching Voltage AC Max	V	300
Switching Voltage DC Max	V	300
Switching Current Max	A	0.5
Pin numbers	Upper-3 & 4	Lower- 1 & 2
All ratings are for resistive load only.		

Standard Parts	Action	Upper level	Lower level	Total length
SSV66A35B85SPM12	no/nc	35	85	122
SSV66A35B135SPM12	no/nc	35	135	172
SSV66A35B160SPM12	no/nc	35	160	197
SSV66A35B185SPM12	no/nc	35	185	222
SSV66A35B210SPM12	no/nc	35	210	237
SSV66A35B235SPM12	no/nc	35	235	272

Custom versions can be made for particular applications. Please contact Cynergy3 with your requirements.

#### Mechanical Dimensions

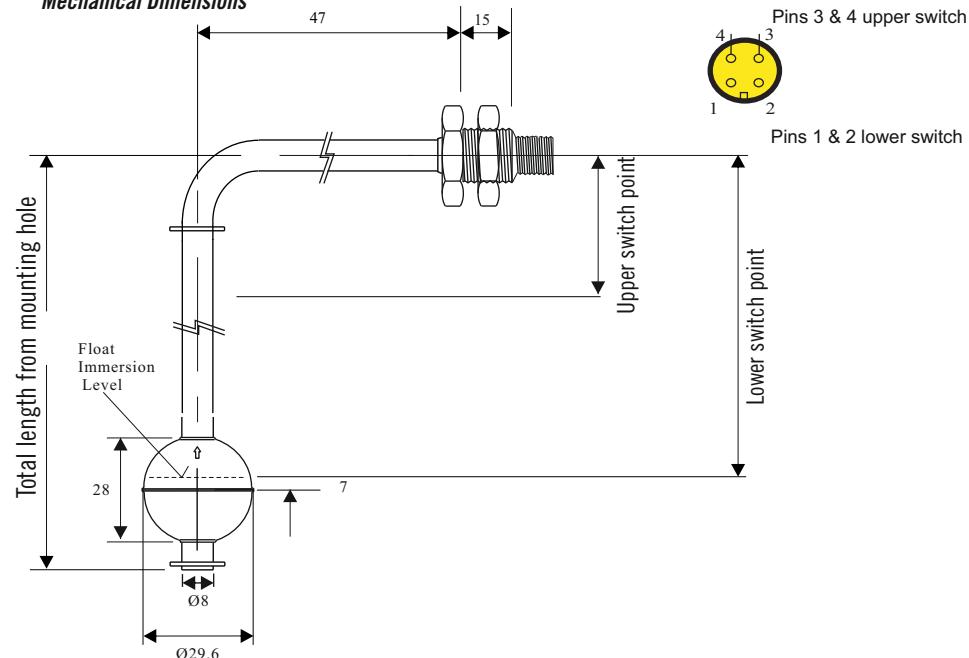

Cynergy3 Components Ltd.  
7 Cobham Road  
Ferndown Industrial Estate  
Wimborne, Dorset BH21 7PE  
Telephone +44 (0) 1202 897969

Email:sales@cynergy3.com

ISO9001 CERTIFIED

www.cynergy3.com