

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Eaton \(formerly Cooper Bussmann\)](#)
[MPIA4040R1-R10-R](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

Technical Data 10230

Effective August 2014

Coiltronics MPIA4040

Automotive Grade

High Current, High Frequency, Miniature Power Inductors



Product description:

- AEC-Q200 Grade 3 qualified
- Handles high transient inrush current spikes
- Magnetically shielded
- Frequency range 20kHz to 10MHz
- Inductance range from 0.09μH to 22μH
- Current range from 1.1A to 32.0A
- 4.7 x 4.31 footprint surface mount package in 1.2, 1.5, 1.85 or 2.0mm heights
- Rugged construction
- Halogen free, lead free, RoHS compliant

Applications:

- Body electronics
 - Central body control module
 - Vehicle access control system
 - Headlamps, tail lamps and interior lighting
 - Door control
- Advanced driver assistance systems
 - 77GHz radar systems
 - Automatic parking control
 - Collision avoidance system
 - Basic and smart surround, and rear and front view camera
 - Adaptive Cruise Control (ACC)
 - Car black box system
- Infotainment and cluster electronics
 - Active noise cancellation (ANC)
 - Audio subsystem: head unit and trunk amp
 - Digital instrument cluster
 - In-vehicle infotainment (IVI) and navigation
 - Port power/USB hub for front and rear passengers
- Chassis and safety electronics
 - Airbag control unit

Environmental data:

- Storage temperature range (component): -55°C to +125°C
- Operating temperature range: -55°C to +125°C (ambient plus self temperature rise)
- Solder reflow temperature: J-STD-020D compliant



The Coiltronics brand of magnetics (formerly of the Bussmann Division of Cooper Industries) is now part of Eaton's Electrical Group, Electronics Division.

Coiltronics is now part of Eaton
Same great products plus even more.



Powering Business Worldwide

Technical Data 10230
 Effective August 2014

MPIA4040 Series Automotive Grade
High Current, High Frequency
Miniature Power Inductors

Product specifications

Part Number ⁵	OCL ¹ ± 20% (μH)	Part Marking Designator	I_{rms}^2 (Amps)	I_{sat}^3 @ 25°C (Amps)	DCR (mΩ) ± 20% @ 20°C	K-factor ⁴
R1 -- 1.2mm Height						
MPIA4040R1-R10-R	0.09	A	8.00	32.0 [†]	8.50	1401
MPIA4040R1-R15-R	0.15	B	7.00	26.0 [†]	11.0	989
MPIA4040R1-R22-R	0.23	C	5.50	21.0	18.0	814
MPIA4040R1-R33-R	0.33	D	4.40	17.0	28.0	659
MPIA4040R1-R47-R	0.47	E	5.20	11.5	20.0	1295
MPIA4040R1-R68-R	0.68	F	3.30	9.00	51.0	461
MPIA4040R1-1R0-R	1.0	G	3.70	7.70	40.0	990
MPIA4040R1-1R5-R	1.5	H	3.00	6.50	60.0	732
MPIA4040R1-2R2-R	2.2	I	2.60	5.90	80.0	623
MPIA4040R1-3R3-R	3.3	J	2.20	5.10	115	481
MPIA4040R1-4R7-R	4.7	K	1.80	3.80	180	411
MPIA4040R1-6R8-R ^{††}	6.8	L	1.50	3.20	250	344
MPIA4040R1-100-R ^{††}	10.0	M	1.20	2.80	370	276
R2 -- 1.5mm Height						
MPIA4040R2-R47-R	0.47	A	6.40	12.2	13.0	1403
MPIA4040R2-1R0-R	1.0	B	4.60	8.90	25.0	935
MPIA4040R2-1R5-R	1.5	C	3.80	7.60	37.0	701
MPIA4040R2-2R2-R	2.2	D	3.20	5.70	58.0	647
MPIA4040R2-3R3-R	3.3	E	2.60	5.40	76.0	495
MPIA4040R2-4R7-R	4.7	F	2.20	4.30	105	421
MPIA4040R2-6R8-R	6.8	G	1.80	3.40	158	351
MPIA4040R2-100-R ^{††}	10.0	H	1.50	3.10	240	271

- 1 Open Circuit Inductance (OCL) Test Parameters: 100kHz, 0.10V_{rms}, 0.0Adc
 2 I_{rms} : DC current for an approximate temperature rise of 40°C without core loss. De-rating is necessary for AC currents. Temperature rise is dependent upon several factors, including the PCB pad layout, trace thickness and width, air-flow and proximity to other heat generating components. It is recommended the part temperature not exceed 125°C under worst case operating conditions and therefore, the temperature rise should be verified in the end use application. Irms testing was performed on a 19.05mm long x 6.35mm wide x 0.070mm thick copper trace in still air.
 3 I_{sat} : Peak current for approximately 30% rolloff at +25°C.

- 4 K-factor: Used to determine B_{pp} for core loss (see graph). B_{pp} = K * L * DI.
 Bp-p : (Gauss), K: (K-factor from table), L: (inductance in μH),
 DI (peak-to-peak ripple current in amps).
 5 Part Number Definition: MPIA4040RX-XXX-R
 • MPIA4040X = product code and size
 • XXX = inductance value in all, "R" = decimal point
 - If no "R" is present, then third digit equals the number of zeros
 • "-R" suffix = RoHS compliant
[†] Transient pulse not to exceed 1 millisecond.
^{††} Maximum operating frequency less than 10MHz, consult factory for application specific values.

MPIA4040 Series Automotive Grade
High Current, High Frequency
Miniature Power Inductors

Technical Data 10230
 Effective August 2014

Part Number ⁵	OCL ¹ ± 20% (μH)	Part Marking Designator	I_{rms}^2 (Amps)	I_{sat}^3 @ 25°C (Amps)	DCR (mΩ) ± 20% @ 20°C	K-factor ⁴
R3 -- 1.85mm Height						
MPIA4040R3-R22-R	0.22	A	8.00	20.0	5.8	1870
MPIA4040R3-R47-R	0.47	B	5.80	17.0	10.3	1530
MPIA4040R3-1R2-R	1.2	C	4.00	9.40	32.0	732
MPIA4040R3-1R5-R	1.5	D	3.80	8.20	36.0	673
MPIA4040R3-2R2-R	2.2	E	3.40	7.90	48.0	543
MPIA4040R3-3R3-R	3.3	F	3.00	6.60	60.0	432
MPIA4040R3-4R7-R	4.7	G	2.30	4.80	92.0	374
MPIA4040R3-6R8-R	6.8	H	2.00	4.50	120	306
MPIA4040R3-100-R	10.0	I	1.50	3.80	213	251
MPIA4040R3-150-R	15.0	J	1.30	3.00	285	213
MPIA4040R3-220-R ^{††}	22.0	K	1.10	2.20	408	174
R4 -- 2.0mm Height						
MPIA4040R4-R22-R	0.22	A	10.1	15.0	5.3	2405
MPIA4040R4-R33-R	0.33	B	9.50	12.8	6.0	1870
MPIA4040R4-R47-R	0.45	C	8.10	11.5	8.2	1530
MPIA4040R4-1R0-R	1.0	D	5.70	8.20	17.0	990
MPIA4040R4-1R5-R	1.5	E	4.90	6.90	23.0	802
MPIA4040R4-2R2-R	2.2	F	3.90	5.70	35.0	673
MPIA4040R4-3R3-R ^{††}	3.3	G	3.30	4.50	49.0	510
MPIA4040R4-4R7-R ^{††}	4.7	H	2.90	3.90	67.0	455
MPIA4040R4-6R8-R ^{††}	6.8	I	2.40	3.20	91.0	374
MPIA4040R4-100-R ^{††}	10.0	J	1.90	2.60	148	306
MPIA4040R4-220-R ^{††}	22.0	K	1.30	1.80	316	203

1 Open Circuit Inductance (OCL) Test Parameters: 100kHz, 0.10V_{rms}, 0.0Adc

2 I_{rms} : DC current for an approximate temperature rise of 40°C without core loss. De-rating is necessary for AC currents. Temperature rise is dependent upon several factors, including the PCB pad layout, trace thickness and width, air-flow and proximity to other heat generating components. It is recommended the part temperature not exceed 125°C under worst case operating conditions and therefore, the temperature rise should be verified in the end use application. Irms testing was performed on a 19.05mm long x 6.35mm wide x 0.070mm thick copper trace in still air.

3 I_{sat} : Peak current for approximately 30% rolloff at +25°C.

4 K-factor: Used to determine B_{pp} for core loss (see graph). B_{pp} = K * L * DI.
 Bp-p : (Gauss), K: (K-factor from table), L: (inductance in μH),
 DI (peak-to-peak ripple current in amps).

5 Part Number Definition: MPIA4040RX-XXX-R

- MPIA4040X = product code and size
- XXX = inductance value in all, "R" = decimal point
- If no "R" is present, then third digit equals the number of zeros
- "-R" suffix = RoHS compliant

† Transient pulse not to exceed 1 millisecond.


†† Maximum operating frequency less than 10MHz, consult factory for application specific values.

Technical Data 10230

Effective August 2014


MPIA4040 Series Automotive Grade High Current, High Frequency Miniature Power Inductors

Dimensions - mm

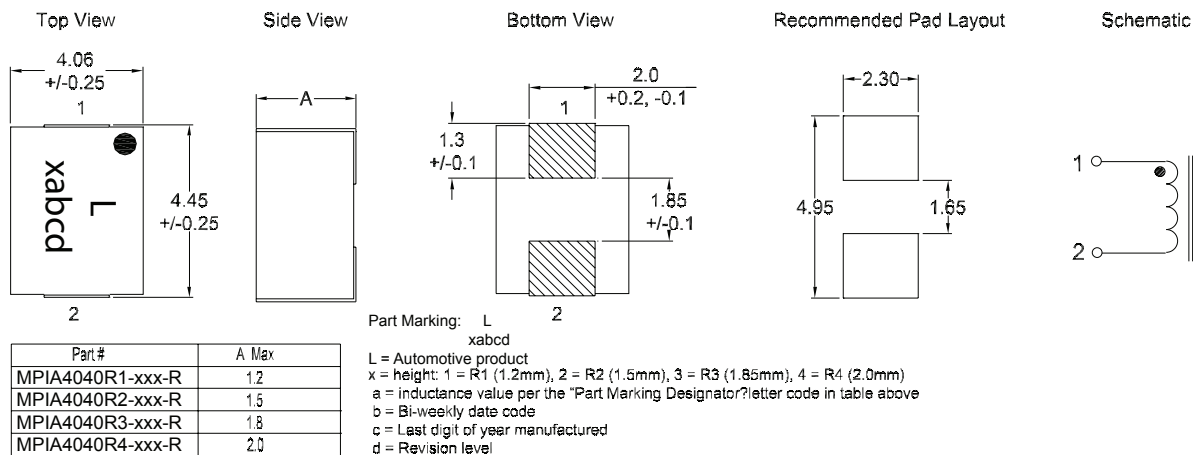


Soldering surfaces to be coplanar within 0.1016 millimeters
PCB tolerances +/-0.1mm unless otherwise specified
Do not route traces or vias underneath the inductor

Packaging information - mm

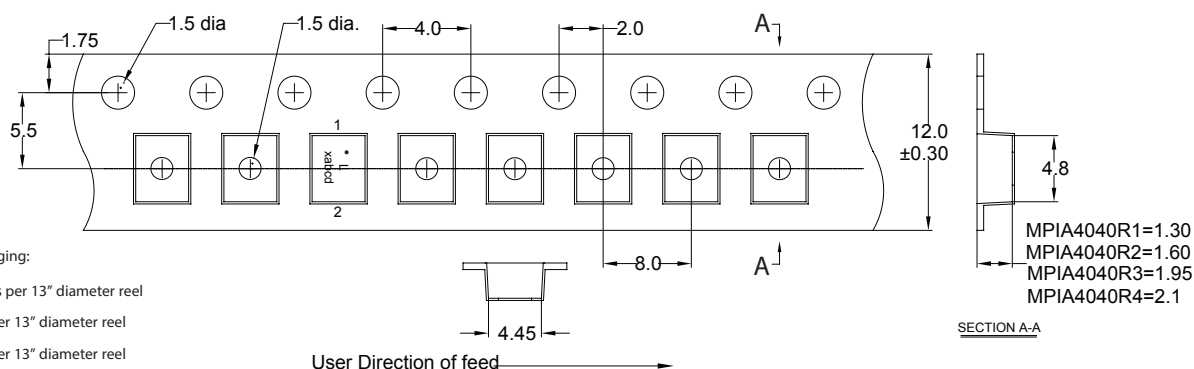





Temperature rise vs. total loss

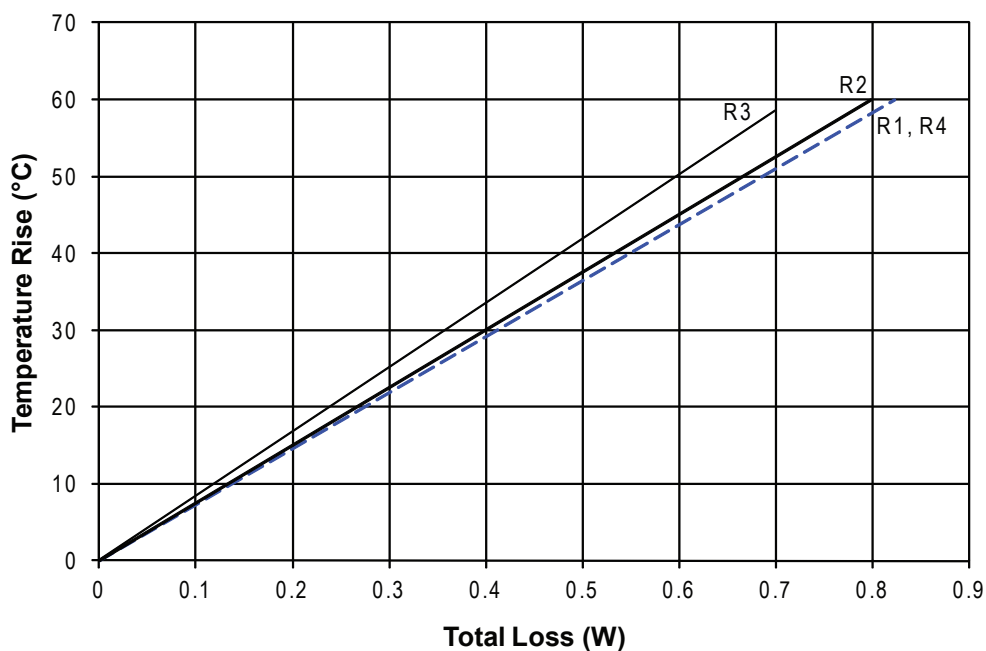

MPIA4040 Series Automotive Grade
High Current, High Frequency
Miniature Power Inductors

Technical Data 10230
Effective August 2014

Core loss

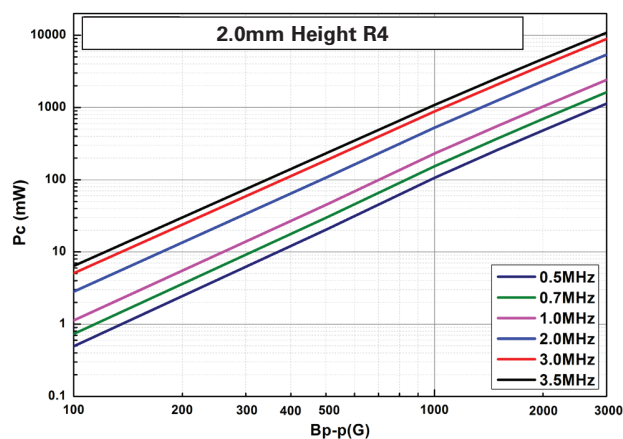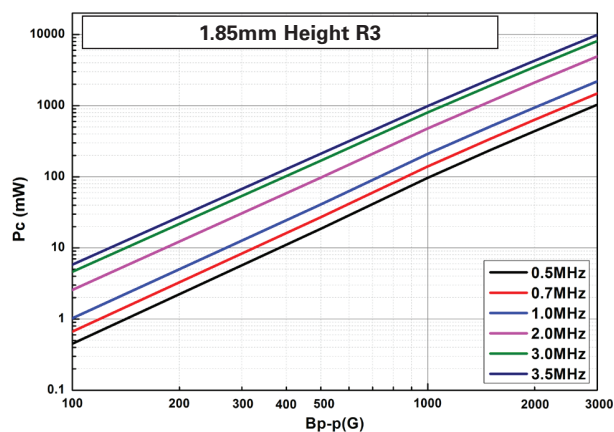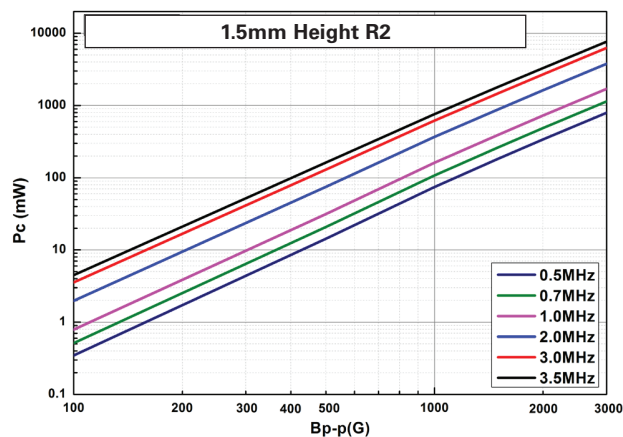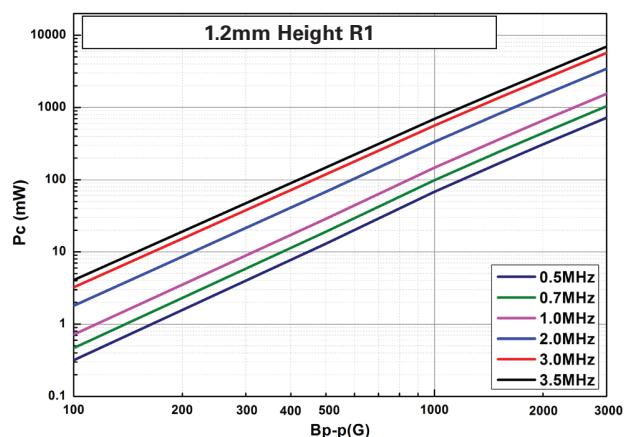

Technical Data 10230

Effective August 2014


MPIA4040 Series Automotive Grade

High Current, High Frequency


Miniature Power Inductors

1.2mm Height R1 inductance characteristics — % of OCL vs. I_{DC}


MPIA4040R1-R10-R

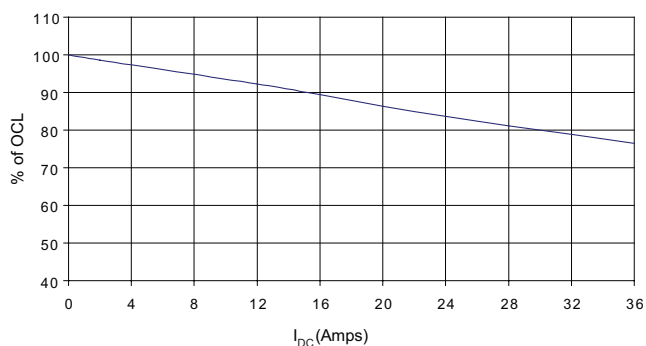


MPIA4040R1-R15-R

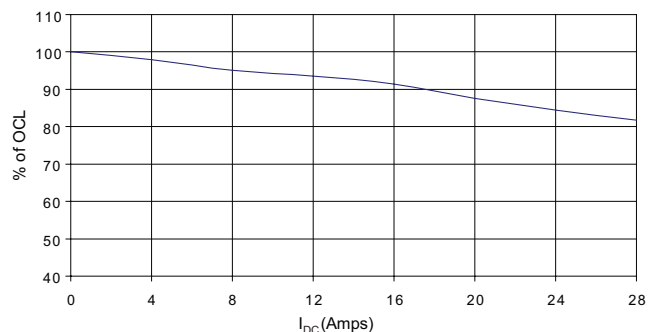


MPIA4040R1-R22-R

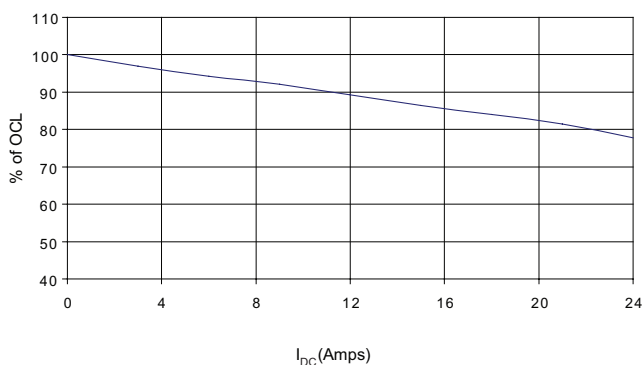


MPIA4040R1-R33-R

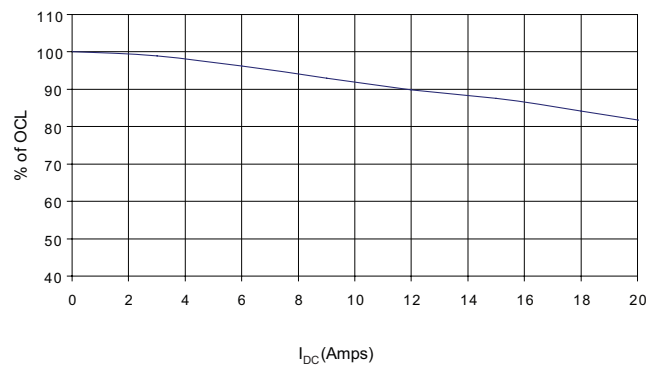

MPIA4040R1-R47-R

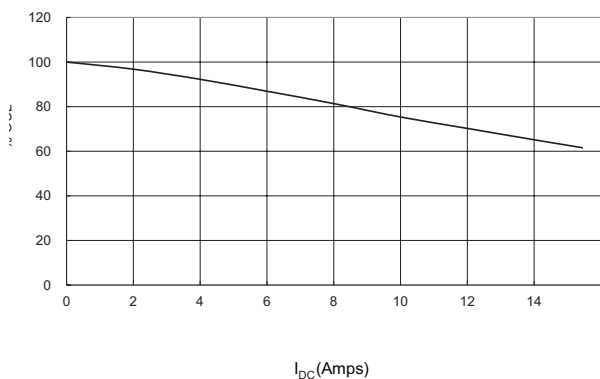








MPIA4040R1-R68-R

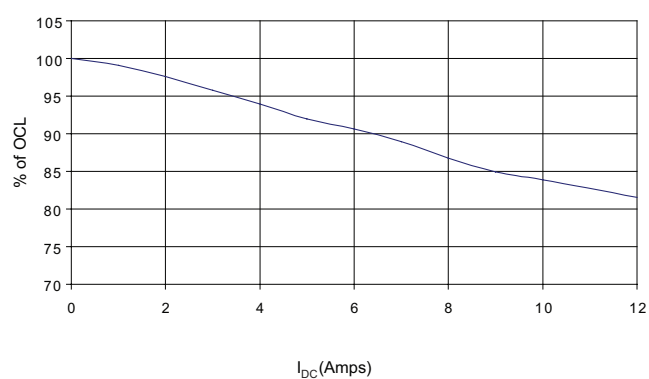

MPIA4040 Series Automotive Grade
High Current, High Frequency
Miniature Power Inductors

Technical Data 10230
Effective August 2014

1.2mm Height R1 inductance characteristics — % of OCL vs. I_{DC}

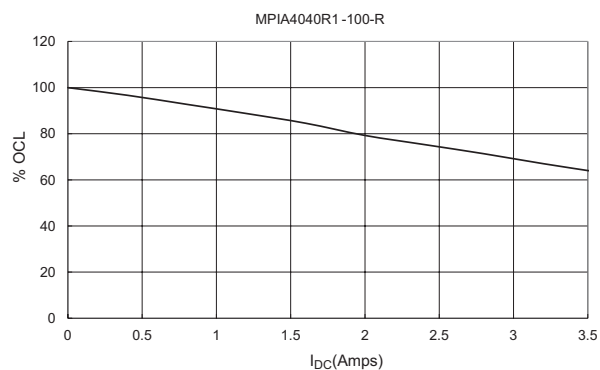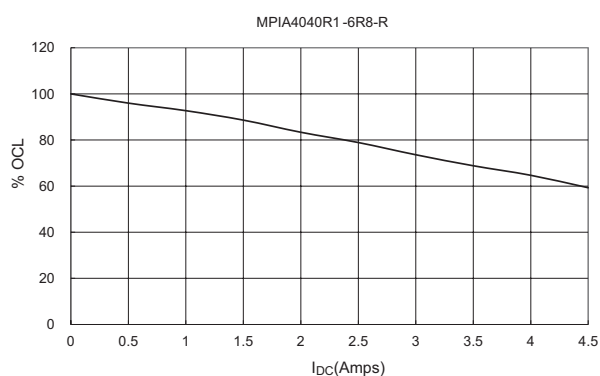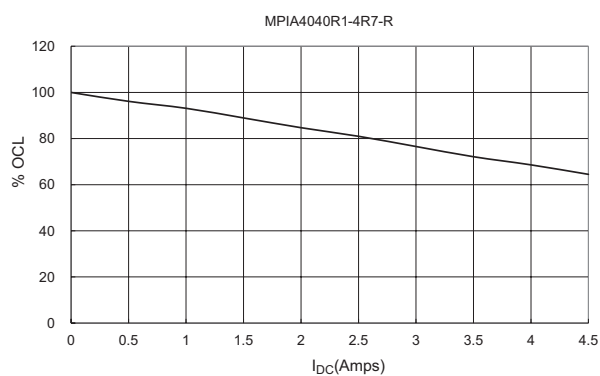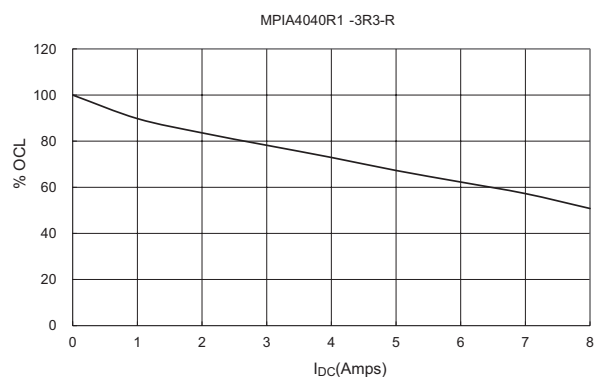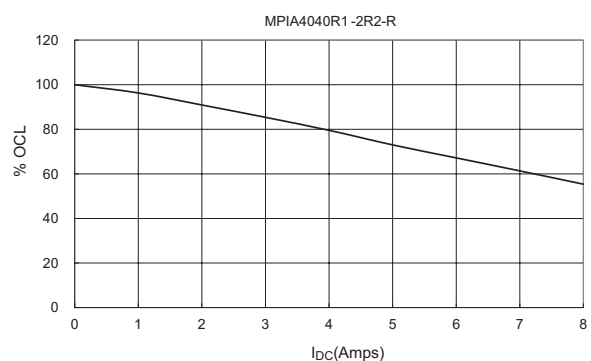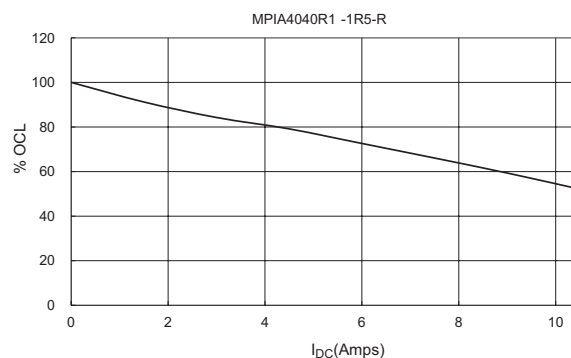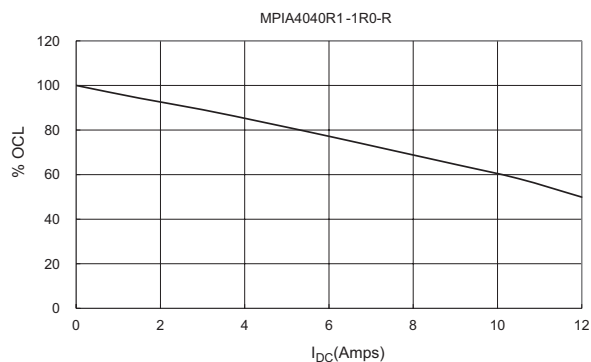

Technical Data 10230









Effective August 2014

MPIA4040 Series Automotive Grade

High Current, High Frequency

Miniature Power Inductors

1.5mm Height R2 inductance characteristics — % of OCL vs. I_{DC}

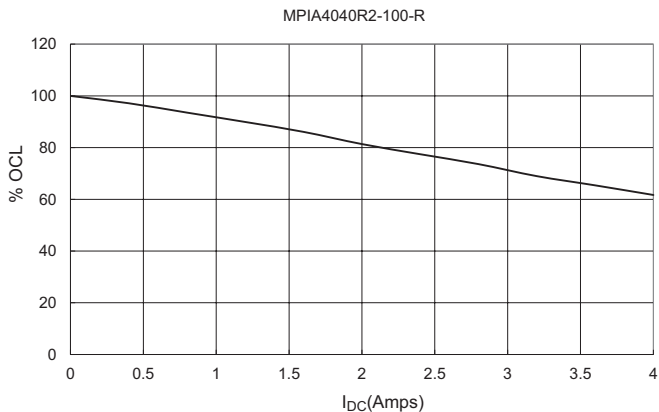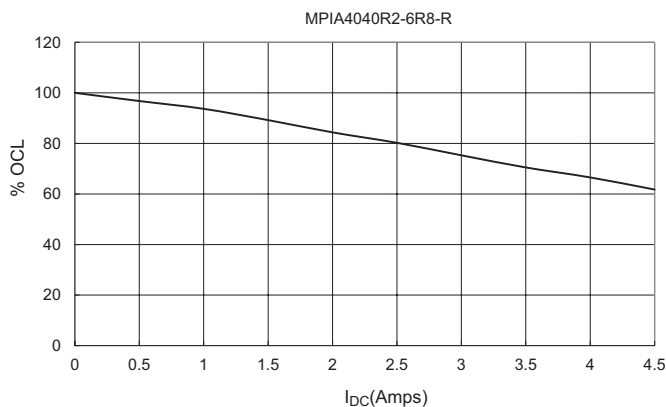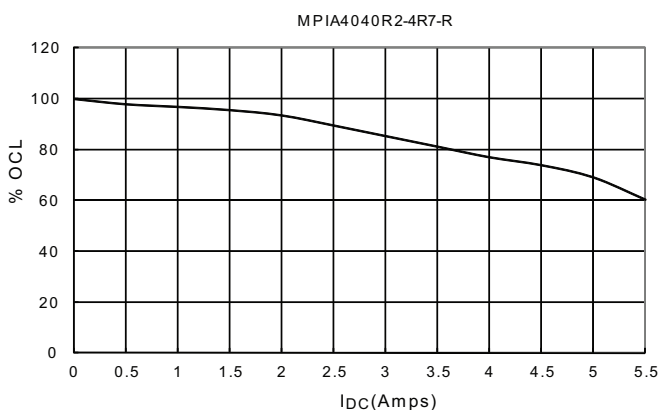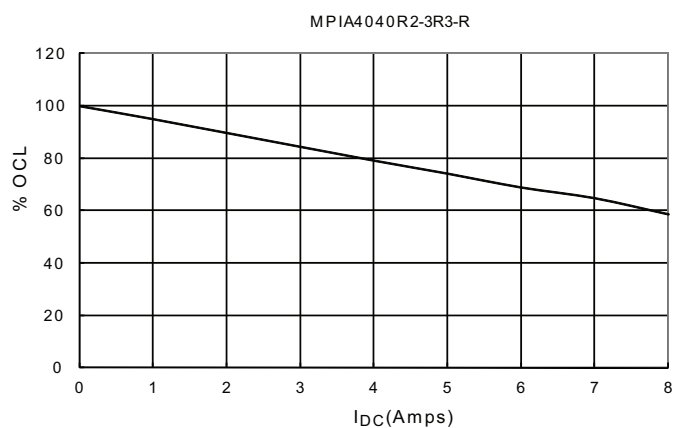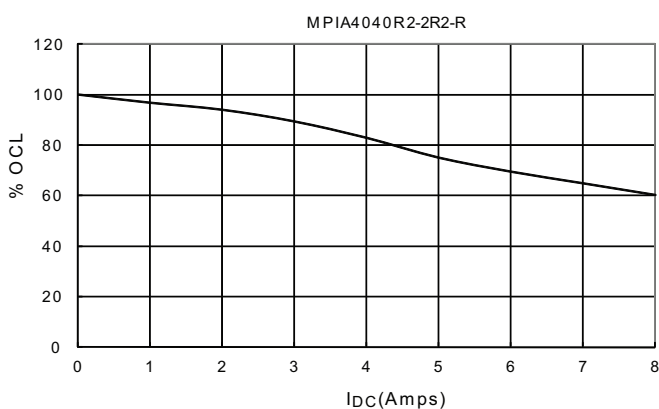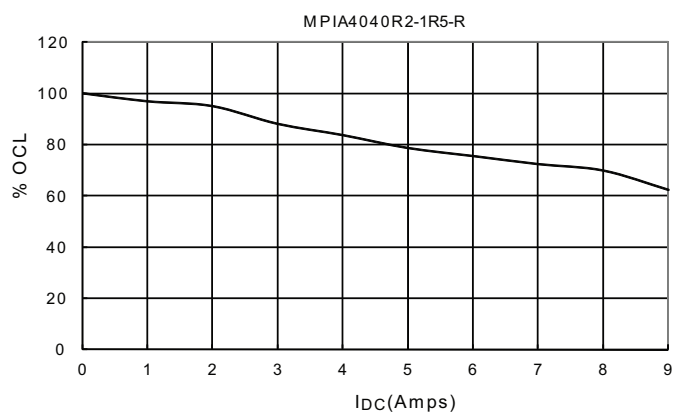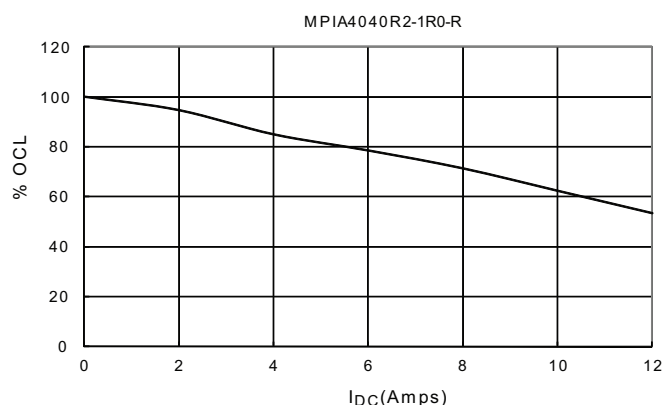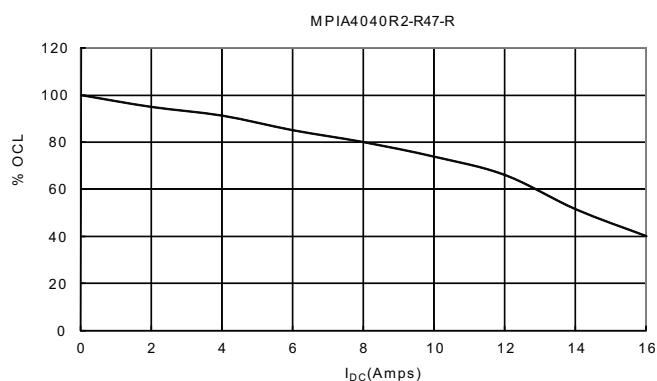


MPIA4040 Series Automotive Grade
High Current, High Frequency
Miniature Power Inductors


Technical Data 10230
Effective August 2014

1.85mm Height R3 inductance characteristics — % of OCL vs. I_{DC}


MPIA4040R3-R22-R

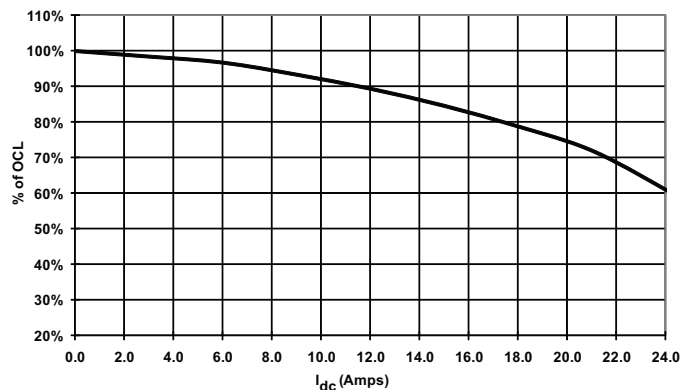


MPIA4040R3-R47-R

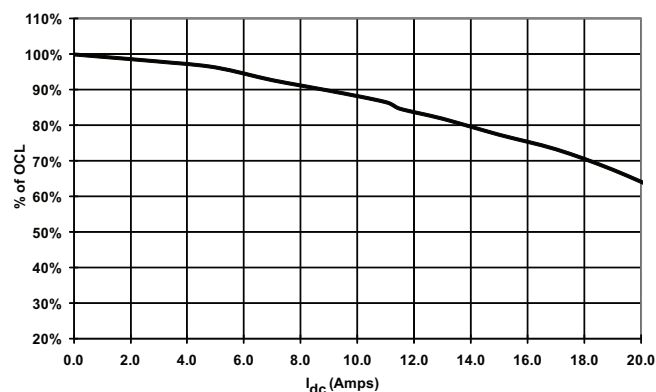


MPIA4040R3-1R2-R

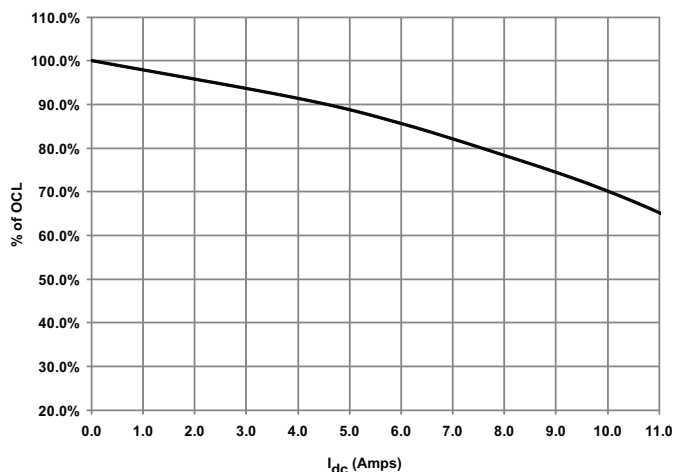


MPIA4040R3-1R5-R

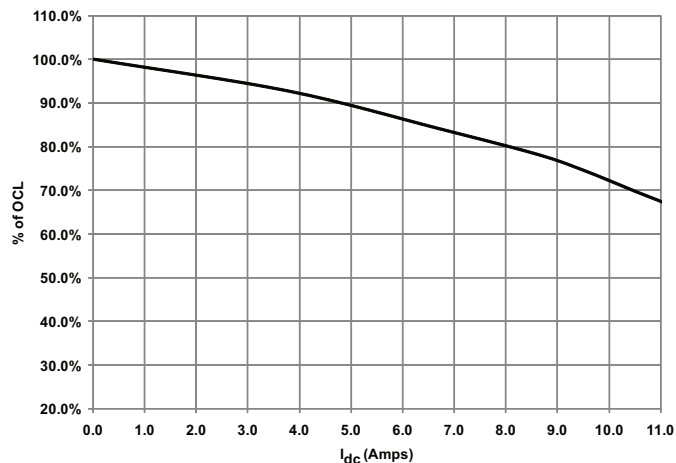

MPIA4040R3-2R2-R

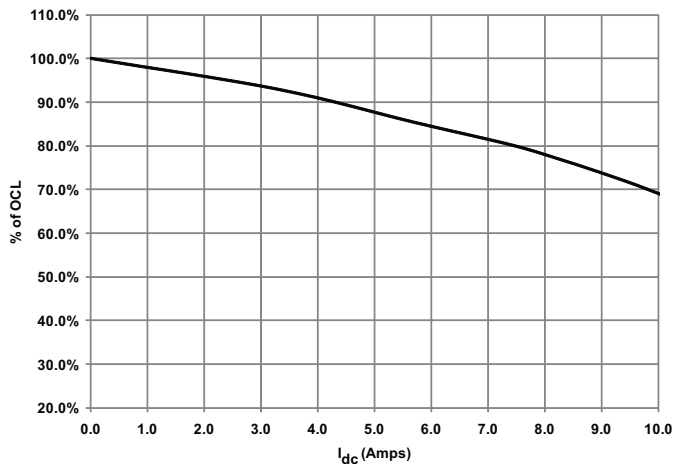

MPIA4040R3-3R3-R

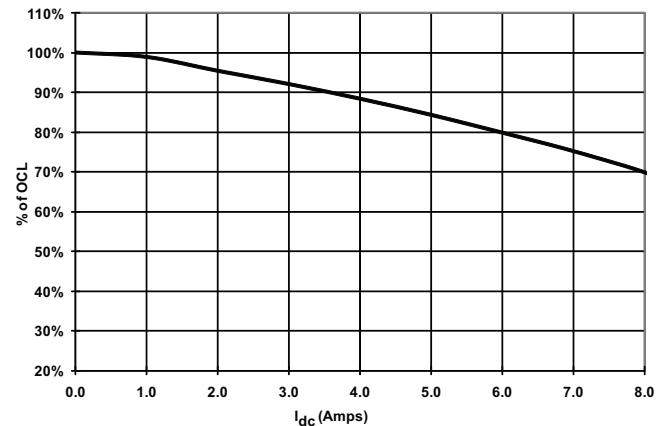


Technical Data 10230
Effective August 2014


MPIA4040 Series Automotive Grade
High Current, High Frequency
Miniature Power Inductors

1.85mm Height R3 inductance characteristics — % of OCL vs. I_{DC}


MPIA4040R3-4R7-R

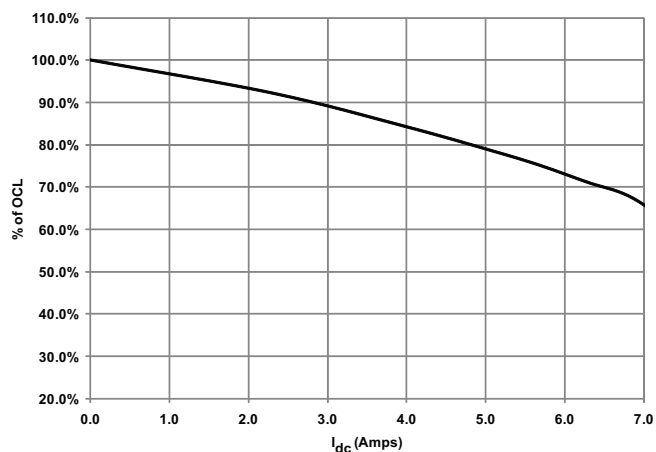


MPIA4040R3-6R8-R

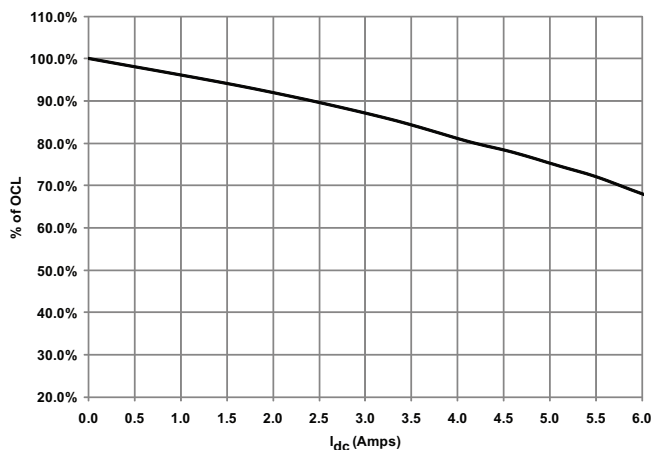


MPIA4040R3-100-R

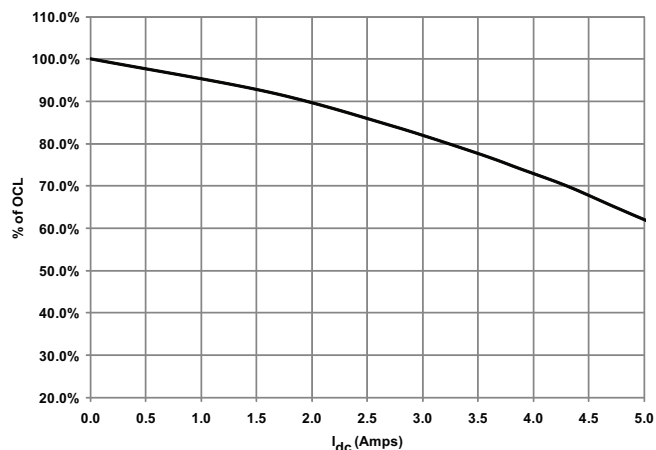

MPIA4040R3-150-R

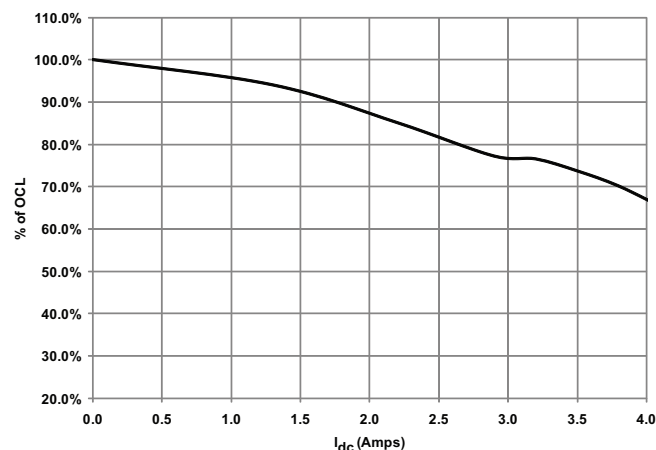









MPIA4040R3-220-R

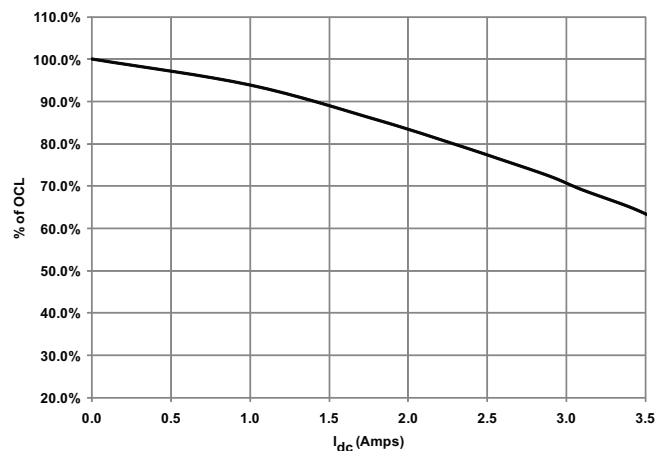

MPIA4040 Series Automotive Grade
High Current, High Frequency
Miniature Power Inductors

Technical Data 10230
Effective August 2014

2.0mm Height R4 inductance characteristics — % of OCL vs. I_{DC}

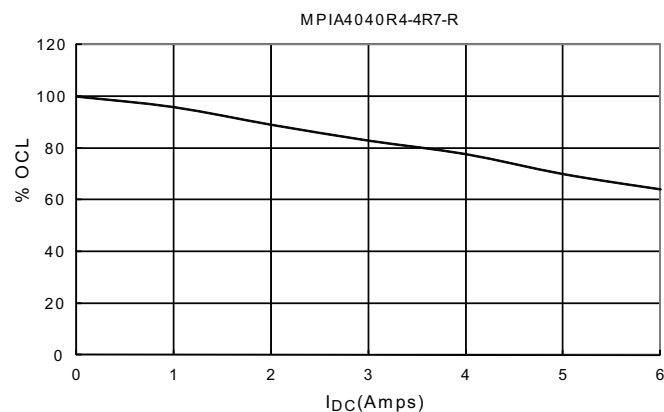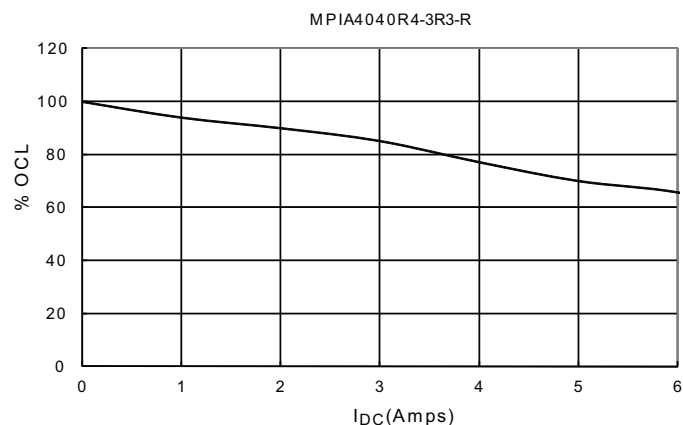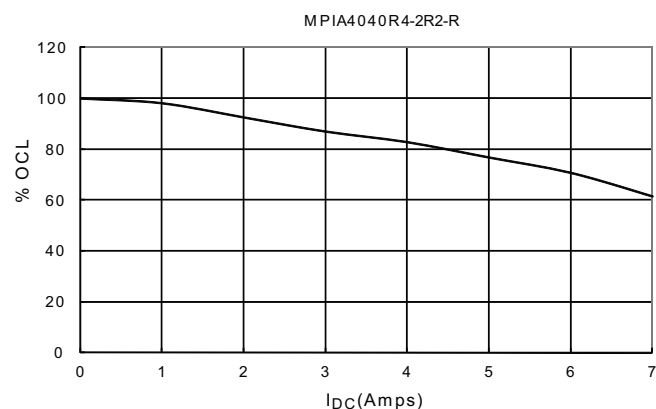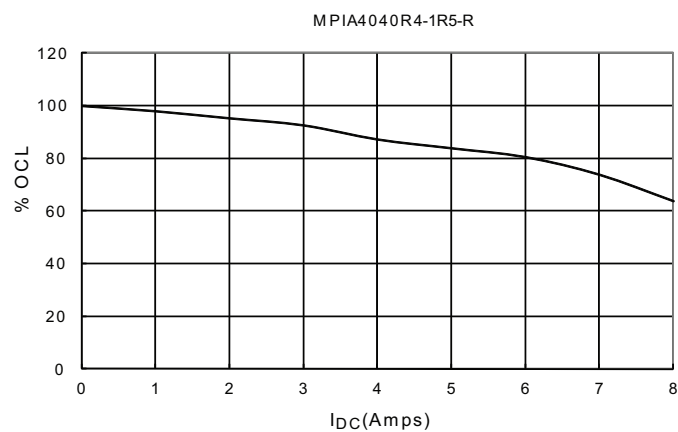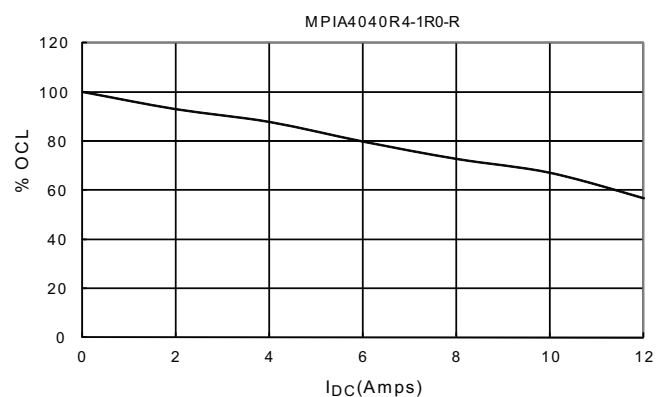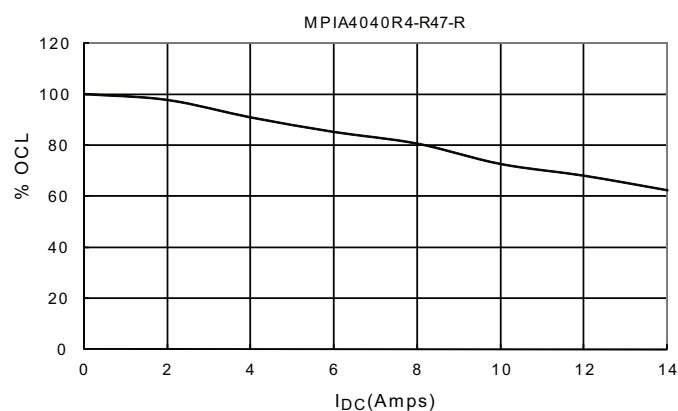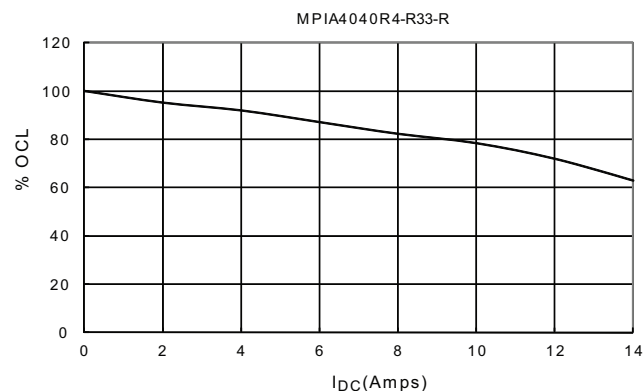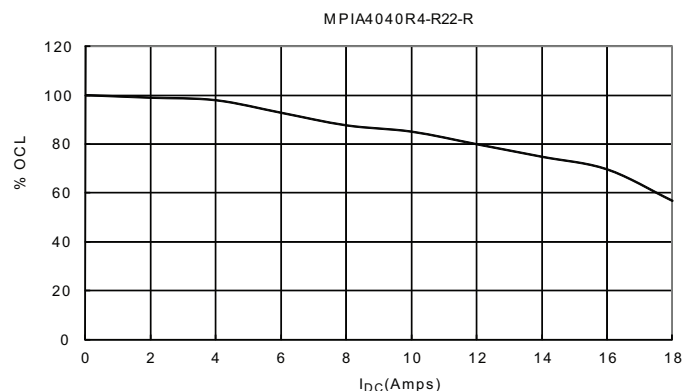

Technical Data 10230




Effective August 2014

MPIA4040 Series Automotive Grade

High Current, High Frequency

Miniature Power Inductors

2.0mm Height R4 inductance characteristics — % of OCL vs. I_{DC}

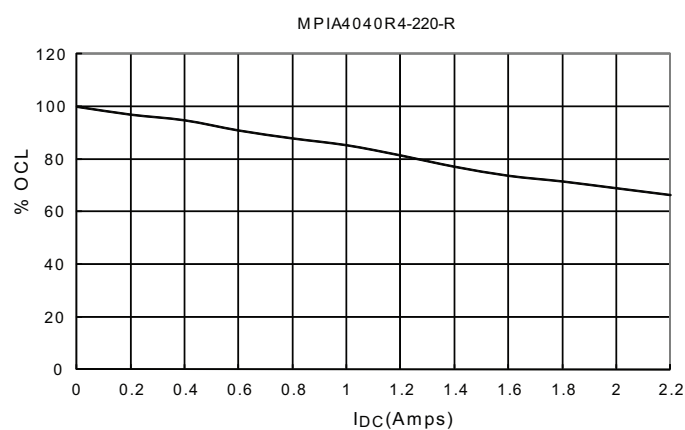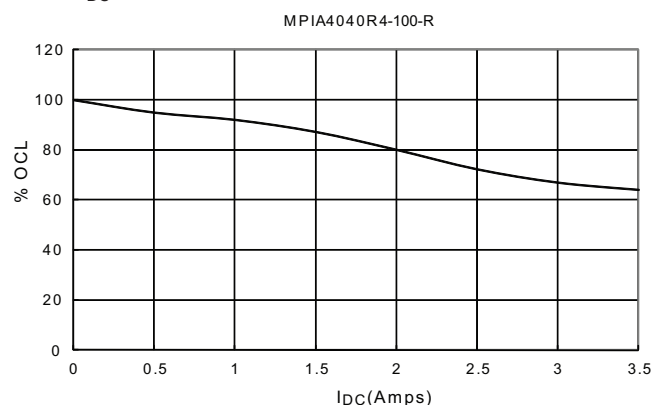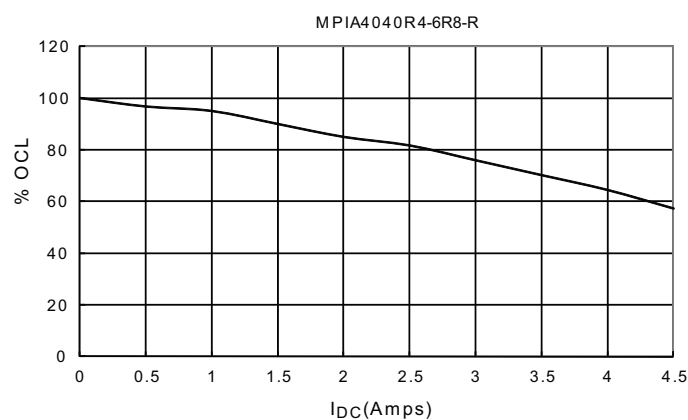

MPIA4040 Series Automotive Grade
High Current, High Frequency
Miniature Power Inductors

Technical Data 10230
 Effective August 2014

Solder reflow profile

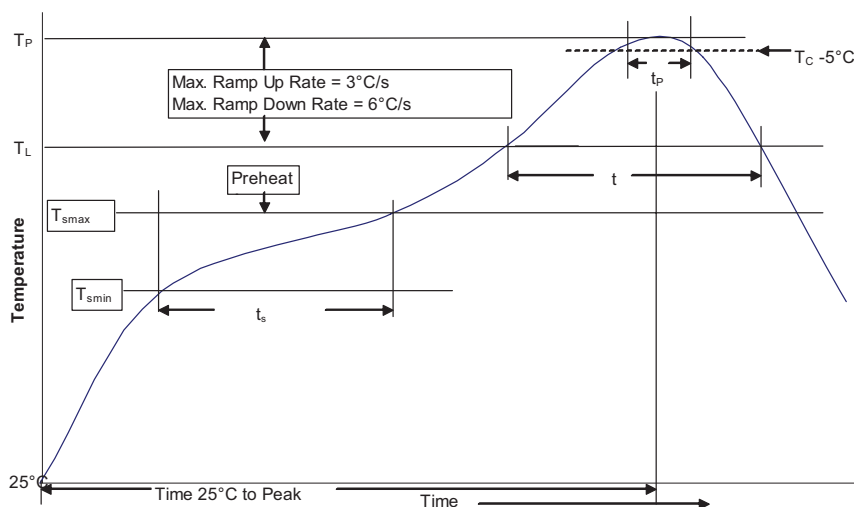


Table 1 - Standard SnPb Solder (T_c)

Package Thickness	Volume mm^3 <350	Volume mm^3 ≥350
<2.5mm	235°C	220°C
≥2.5mm	220°C	220°C

Table 2 - Lead (Pb) Free Solder (T_c)

Package Thickness	Volume mm^3 <350	Volume mm^3 350 - 2000	Volume mm^3 >2000
<1.6mm	260°C	260°C	260°C
1.6 - 2.5mm	260°C	250°C	245°C
>2.5mm	250°C	245°C	245°C

Reference JEDEC J-STD-020D

Profile Feature	Standard SnPb Solder	Lead (Pb) Free Solder
Preheat and Soak		
• Temperature min. (T_{smin})	100°C	150°C
• Temperature max. (T_{smax})	150°C	200°C
• Time (T_{smin} to T_{smax}) (t_s)	60-120 Seconds	60-120 Seconds
Average ramp up rate T_{smax} to T_p	3°C/ Second Max.	3°C/ Second Max.
Liquidous temperature (T_L)	183°C	217°C
Time at liquidous (t_l)	60-150 Seconds	60-150 Seconds
Peak package body temperature (T_p)*	Table 1	Table 2
Time (t_p)** within 5 °C of the specified classification temperature (T_c)	20 Seconds**	30 Seconds**
Average ramp-down rate (T_p to T_{smax})	6°C/ Second Max.	6°C/ Second Max.
Time 25°C to Peak Temperature	6 Minutes Max.	8 Minutes Max.

* Tolerance for peak profile temperature (T_p) is defined as a supplier minimum and a user maximum.

** Tolerance for time at peak profile temperature (t_p) is defined as a supplier minimum and a user maximum.

North America

Eaton's Electrical Group
 Electronics Division
 1225 Broken Sound Parkway NW
 Suite F
 Boca Raton, FL 33487-3533
 Tel: 1-561-998-4100
 Fax: 1-561-241-6640
 Toll Free: 1-888-414-2645

Eaton's Electrical Group
 Electronics Division
 P.O. Box 14460
 St. Louis, MO 63178-4460
 Tel: 1-636-394-2877
 Fax: 1-636-527-1607

Europe

Eaton's Electrical Group
 Electronics Division
 Burton-on-the-Wolds
 Leicestershire, LE 12 5th UK
 Phone: +44 (0) 1509 882 600
 Fax: +44 (0) 1509 882 786

Eaton's Electrical Group
 Electronics Division
 Avda Santa Eulalia, 290
 Terrassa, Barcelona 08223 Spain
 Phone: +34-93-736-2813
 Fax: +34-93-783-5055

Asia Pacific

Eaton's Electrical Group
 Electronics Division
 No.2, #06-01
 Serangoon North Avenue 5
 Singapore 554911
 Tel: +65 6645 9888
 Fax: +65 6728 3155

The only controlled copy of this Data Sheet is the electronic read-only version located on the Bussmann Network Drive. All other copies of this document are by definition uncontrolled. This bulletin is intended to clearly present comprehensive product data and provide technical information that will help the end user with design applications. Bussmann reserves the right, without notice, to change design or construction of any products and to discontinue or limit distribution of any products. Bussmann also reserves the right to change or update, without notice, any technical information contained in this bulletin. Once a product has been selected, it should be tested by the user in all possible applications.

Life Support Policy: Bussmann does not authorize the use of any of its products for use in life support devices or systems without the express written approval of an officer of the Company. Life support systems are devices which support or sustain life, and whose failure to perform, when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in significant injury to the user.

Eaton's Electrical Group
Electronics Division
 114 Old State Road
 Ellisville, MO 63021
 United States
 www.eaton.com/elx

© 2014 Eaton
 All Rights Reserved
 Publication No. 10230 — BU-SB14178
 August 2014

Eaton is a registered trademark.

All other trademarks are property of their respective owners.

www.eaton.com/elx