

## Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:

[Lumex, Inc.](#)  
[SSF-LXH340IGGD](#)


For any questions, you can email us directly:

[sales@integrated-circuit.com](mailto:sales@integrated-circuit.com)

UNCONTROLLED DOCUMENT

PART NUMBER  
SSF-LXH340IGGD

REV.

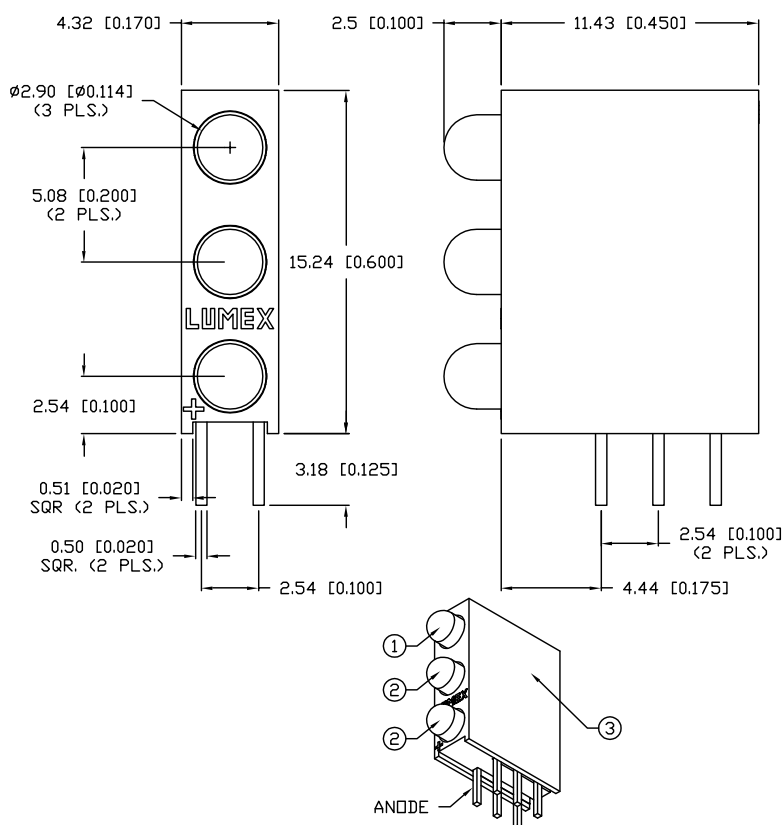

| ELECTRO-OPTICAL CHARACTERISTICS $T_A=25^{\circ}\text{C}$ $I_f=20\text{mA}$ |     |       |                 |                      |
|----------------------------------------------------------------------------|-----|-------|-----------------|----------------------|
| PARAMETER                                                                  | RED | GREEN | UNITS           | TEST COND            |
| PEAK WAVELENGTH                                                            | 635 | 565   | nm              |                      |
| FORWARD VOLTAGE (TYP.)                                                     | 2.0 | 2.2   | $V_f$           |                      |
| FORWARD VOLTAGE (MAX.)                                                     | 2.5 | 2.5   | $V_f$           |                      |
| REVERSE VOLTAGE                                                            | 5.0 | 5.0   | $V_r$           | $I_r=100\mu\text{A}$ |
| AXIAL INTENSITY                                                            | 40  | 30    | mcd             | $I_f=20\text{mA}$    |
| VIEWING ANGLE                                                              | 60  | 60    | $2\times$ theta |                      |
| LED POSITION:                                                              | 1   | 2~3   |                 |                      |
| EPOXY LENS FINISH: DIFFUSED SAME AS EMITTED COLOR                          |     |       |                 |                      |

| LIMITS OF SAFE OPERATION AT $25^{\circ}\text{C}$ PER DIE |        |            |                        |
|----------------------------------------------------------|--------|------------|------------------------|
| PARAMETER                                                | COLORS | MAX        | UNITS                  |
| PEAK FORWARD CURRENT*                                    |        | 150        | mA                     |
| STEADY CURRENT                                           | (R/G)  | 30/25      | mA                     |
| POWER DISSIPATION                                        |        | 105        | mW                     |
| DERATE FROM $25^{\circ}\text{C}$                         |        | -1.2       | mW/ $^{\circ}\text{C}$ |
| OPERATING, STORAGE TEMP.                                 |        | -40 TO +85 | $^{\circ}\text{C}$     |
| SOLDERING TEMP.                                          |        | +260       | $^{\circ}\text{C}$     |
| 2.0mm FROM BODY                                          |        |            | 3 SEC. MAX             |

\*  $t < 10\mu\text{s}$

NOTES:

1. SSL-LX3044ID, RED LED.
2. SSL-LX3044GD, GREEN LED. (2 PCS.)
3. SSH-LXH340 HOLDER, BLACK NYLON, 94V-0.

UNCONTROLLED DOCUMENT

\*UNLESS OTHERWISE SPECIFIED TOLERANCES PER DECIMAL PRECISION ARE: X=±1 (±0.039), X.X=±0.5 (±0.020), X.XX=±0.25 (±0.010), X.XXX=±0.127 (±0.005). LEAD SIZE=±0.05 (±0.002), LEAD LENGTH=±0.75 (±0.030). MIN.=+DECIMAL PRECISION MAX.=+0.00 -DECIMAL PRECISION

| REV. | PART NUMBER                                                                                                                                | CONFIDENTIAL INFORMATION                                                                                                                                                                                                                                                                                                     | LUMEX           | 290 E. HELEN ROAD<br>PALATINE, IL 60067-6976<br>PHONE: +1.847.359.2790<br>US WEB: www.lumex.com<br>TW WEB: www.lumex.com.tw |
|------|--------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------|-----------------------------------------------------------------------------------------------------------------------------|
|      | SSF-LXH340IGGD                                                                                                                             | THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF LUMEX INC. EXCEPT AS SPECIFICALLY AUTHORIZED IN WRITING BY LUMEX INC., THE HOLDER OF THIS DOCUMENT SHALL KEEP ALL INFORMATION CONTAINED HEREIN CONFIDENTIAL AND SHALL PROTECT SAME IN WHOLE OR IN PART FROM DISCLOSURE AND DISSEMINATION TO ALL THIRD PARTIES. |                 |                                                                                                                             |
|      | T-3mm (T-1) RIGHT ANGLE FAULT INDICATOR HOLDER,<br>POS. 1: 635nm HIGH INTENSITY RED,<br>POS.2,3: 565nm GREEN, COLOR DIFFUSED PER POSITION. | RELIABILITY NOTE<br>OUR MANY YEARS OF EXPERIENCE DATA ACCUMULATION INDICATE THAT SOLDER HEAT IS A MAJOR CAUSE OF EARLY AND FUTURE FAILURE.<br>PLEASE PAY ATTENTION TO YOUR SOLDERING PROCESS.                                                                                                                                | DRAWN BY:<br>GB | CHECKED BY:<br>APPROVED BY:<br>DATE: 9.03.02<br>PAGE: 1 OF 1<br>SCALE: N/A                                                  |