

Excellent Integrated System Limited

Stocking Distributor

Click to view price, real time Inventory, Delivery & Lifecycle Information:


[FCI](#)
[8609324G815755E1LF](#)

For any questions, you can email us directly:

sales@integrated-circuit.com

DIMENSIONS


mm (inches)

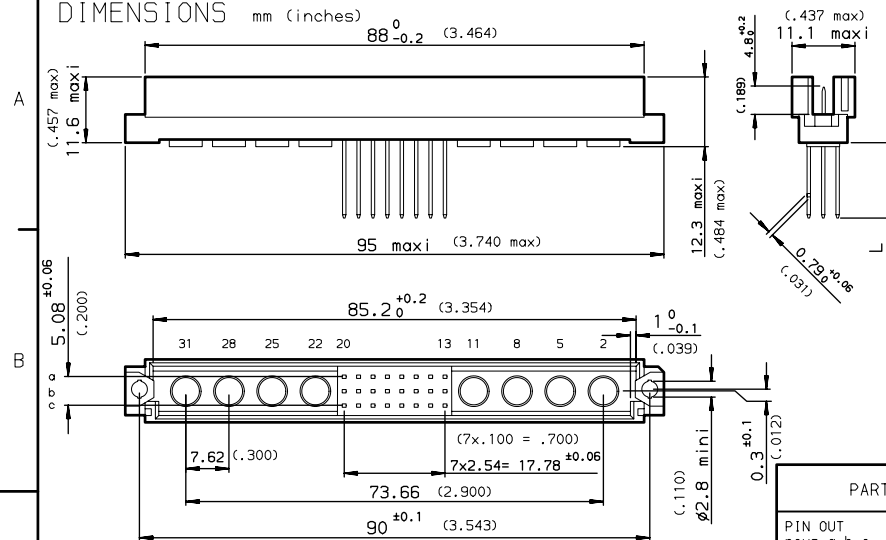

GENERAL CHARACTERISTICS AND ROHS INFORMATIONS:
SEE DRAWING C-8609-0000B

PCB DRILLING

component side

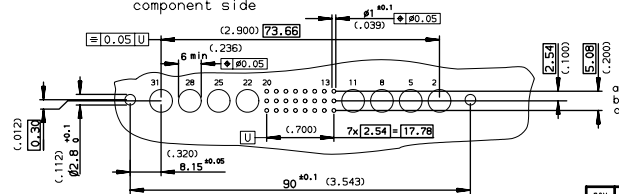

PART NUMBER	8609	G8	7	5
PIN OUT				
rows a-b-c			3	24
rows a-c			4	16
NUMBER OF CONTACTS				
TERMINATION				
L = 13.3 ±0.25 (.523)			WW	15
L = 17.95 ±0.25 (.706)			WW	25
PERFORMANCE CLASS				
DIN 41612 class 3				4
DIN 41612 class 2				6
DIN 41612 class 1				6
TERMINATION TYPE				
TIN LEAD				000E1
LEAD FREE				E1LF

European Views

www.fciconnect.com	surface	ISO 1302	tolerance std	ISO 406 ISO 1101	projection	mm
Dr ROUILLARD 1992/09/21	ISO 1302	✓	ISO 406 ISO 1101	ISO 406 ISO 1101	mm	Scale
Eng TARON 1992/09/21	ANGULAR	LINEAR	0.X ±0.1	0.XX ±0.1	A3	1.5
Chr LEGARE 1992/09/21	0.XX ±2	0.XXX ±0.1	0.XXX ±0.1	0.XXX ±0.1	ECN	LS06-0095
Appr LEGARE 1992/09/21	Product family	DIN 8609	Spec ref	-		
FCI	STRAIGHT MALE WITH SPECIAL CONTACTS	2	C-8609-0318	Rev.	D	
WIRE WRAP						
catalog no	-					

rev	ecm no	dr	date
B	-	RDV	1996/02/22
C	LS05-008	JTA	2005/03/17
D	LS06-0095	LGO	2006/06/16
-	-	-	-
-	-	-	-
-	-	-	-
-	-	-	-

REV F - 2006-04-17

PDM: Rev:D STATUS: Released Printed: May 14, 2011